

# Brüel & Kjær

**1023**

**Sine Generator**

Valid from serial no. 739157

037-0226



# Service

## 1023

### Sine Generator

Valid from serial no. 739157

037-0226

Consisting of:

#### 1023

|                               |                               | page | date  |
|-------------------------------|-------------------------------|------|-------|
| Service Instruction           |                               | 0—1  | 1.79  |
| -                             |                               | 0—2  | 5.75  |
| Technical Description         |                               | 1—1  | 5.75  |
| -                             |                               | 1—2  | 5.75  |
| -                             |                               | 1—3  | 5.75  |
| -                             |                               | 1—4  | 5.75  |
| Checking Procedure            |                               | 2—1  | 5.75  |
| -                             |                               | 2—2  | 5.75  |
| Adjustment Procedure          |                               | 3—1  | 5.75  |
| -                             |                               | 3—2  | 5.75  |
| -                             |                               | 3—3  | 5.75  |
| ZD 0117                       | Frequency Counter             | 1    | 11.75 |
| ZD 0118                       |                               |      |       |
| ZE 0151                       | Output Circuits, Power Supply | 1    | 1.79  |
|                               |                               | 2    | 1.79  |
| ZI 0032                       | Oscillator Circuits           | 1    | 1.79  |
|                               |                               | 2    | 1.79  |
| Block Diagram with Parts List |                               | 4—1  | 1.79  |

#### Trouble Shooting

If any faults should occur please check the instrument according to the procedure outlined below.

When a fault has been traced and corrected, the voltages and adjustments influenced by the correction must be rechecked. The complete instrument should then be tested according to the Checking Procedure to make sure that all basic functions are operative.

The tolerances given in these notes are intended for use as a guide for adjustments.

Before correcting any apparent deviation make sure that the measuring instrument has tolerances small enough not to affect the measurements.

#### Modifications


Due to the constant technical progress the instrument will be modified from time to time in order to provide continuously improved performance.


For this reason there may be small differences between the instrument and the Service Instruction.

However, the local Representative Service is in possession of all information regarding the modifications that have been made.

#### Spare Parts

Please state type and serial number of the instrument when ordering spare parts.

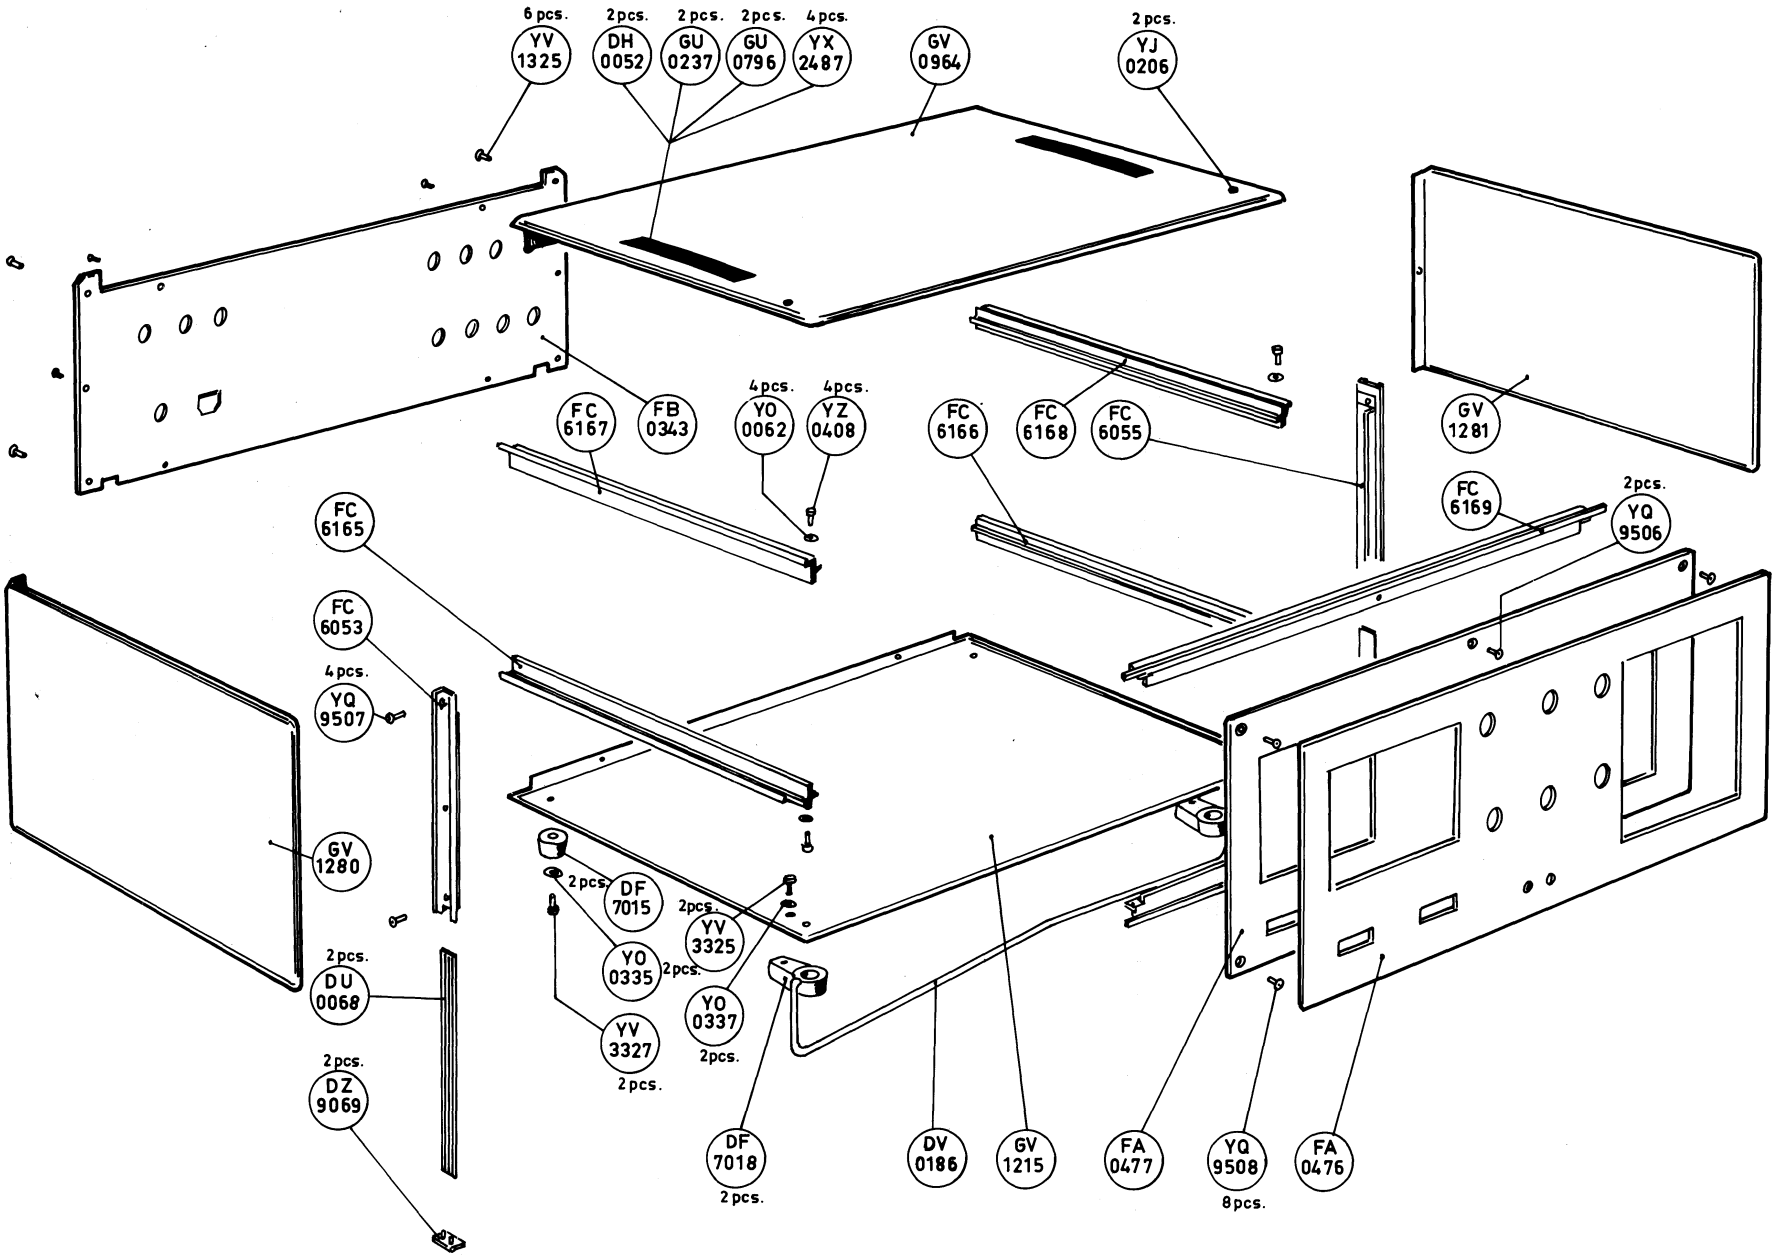

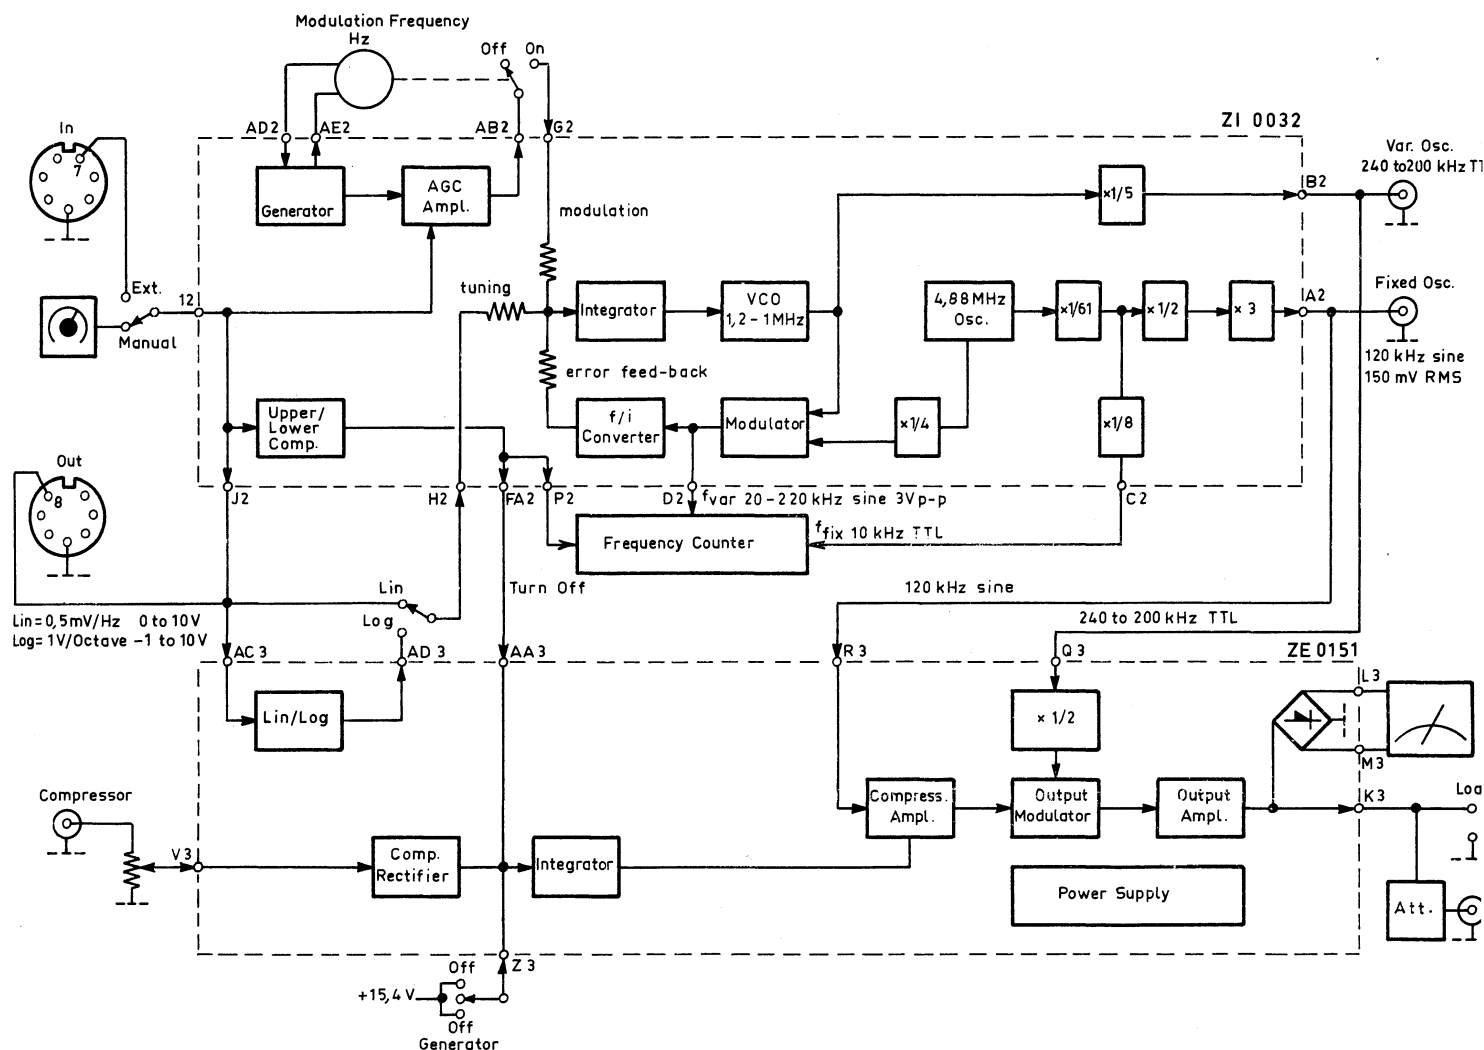

# General

The Sine Generator Type 1023 is a high quality signal source which covers a frequency range from 10 Hz to 20 kHz.

The output signal is produced by mixing a Fixed Oscillator Signal of 120 kHz with a Variable Oscillator signal of 240 to 200 kHz divided by 2.

The Fixed Oscillator signal is produced by a 4.88 MHz Crystal Oscillator which is divided by 61 and by 2 and multiplied by 3 after which the 120 kHz signal is applied to the Compressor Amplifier where the amplitude of the signal is controlled by a DC voltage proportional to the Compressor input signal.

The Variable signal is created by a Voltage Controlled Oscillator with a frequency range of 1.2 to 1 MHz which is divided by 5. In order to linearize and stabilize the VCO, an error feed-back arrangement has been made as explained later in the description.

The Variable Oscillator signal can have a linear or a logarithmic relationship to the DC tuning voltage of 0 to 10V. In Lin. mode the tuning voltage is 0.5 mV per Hz and in Log mode 1 V per octave with 0V at 20 Hz and thus -1 V at 10 Hz.

The output signal of the Generator can be modulated by applying a pulsating DC voltage to the VCO. Modulation frequencies of 1 — 2.5 — 6.3 and 16 Hz can be selected while the frequency deviation is  $\pm 10\%$  of the center frequency up to a maximum of  $\pm 250$  Hz which is remained constant from 2.5 kHz to 20 kHz center frequency.

The Block Diagram is extremely helpful in case of Trouble Shooting as it contains information about signal levels and waveforms between the circuit boards.

However, there are a couple of circuit details in the instrument that need a further discussion:

2



## 1023.1 Technical Description

### Modulators


Two different types of modulators are being used in the instrument. The drawing shows the type which is used to provide 20 to 220 kHz for the Frequency Counter and for the Frequency to Current Converter for stabilizing and correcting the linearity of the VCO.

$f_1$  is applied to the base of V1 which acts as an ordinary amplifier stage as long as V2 is turned OFF by a positive  $f_2$ . V1 will not transfer any signal at all to the output.

When V2 is turned OFF by a positive  $f_2$ , V1 will not transfer any signal at all to the output.


In this way  $f_1$  will be chopped by  $f_2$ , and V3 and V4 are inserted to operate in the same way as V1 and V2 thus creating a balanced modulator.

Also the Constant Level Output Modulator ZM 0200 which can be connected to the Fixed and Variable Osc. outputs is of this type, where a stable output amplitude can be obtained as a fixed amplification is determined by the ratio between RC and RE.

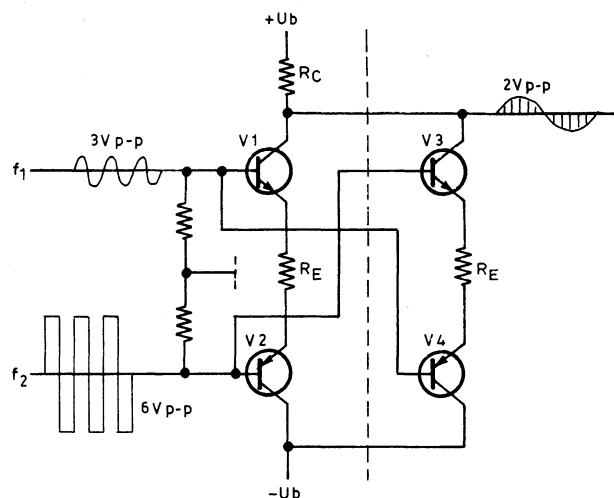

The next drawing shows a more sophisticated type than the previous one. It is used to mix the fixed and variable oscillator signals in order to produce the final output signal of the instrument.

The demands here are low noise, extremely low distortion and a bandwidth on the output from 10 Hz to 20 kHz.

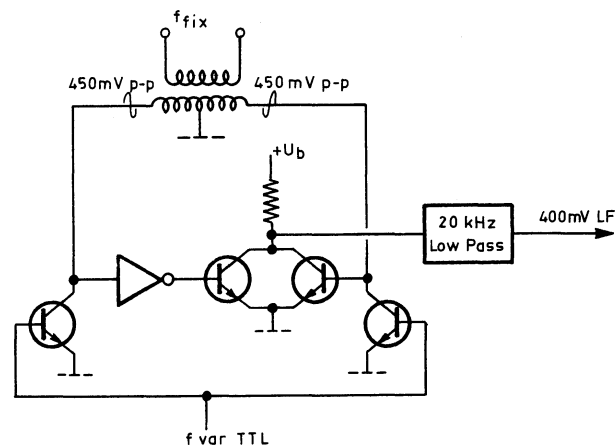


### Servo Loop for VCO

In order to obtain a frequency change proportional to tuning voltage as well as a high frequency stability, a feed-back arrangement has been made.

From the Frequency Tuning potentiometer a positive current is applied to an Integrator the output of which is used to tune the Voltage Controlled Oscillator.

The 1,2 to 1 MHz output signal from this oscillator is mixed with a fixed frequency of 1,22 MHz thus producing a signal from 20 to 220 kHz.

A Frequency to Current converter supplies a current proportional to frequency, and it now appears that the VCO will be tuned to a frequency which causes the negative current output from the converter to be exactly the same value as the positive tuning current.

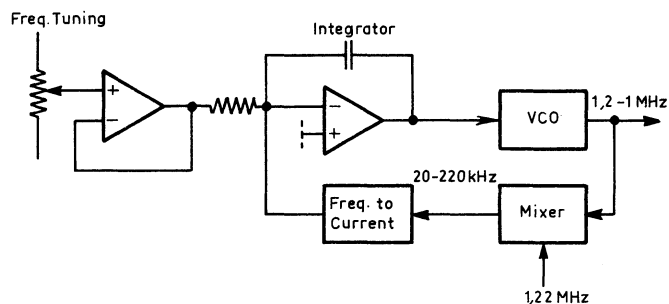


### Frequency to Current Converter

The basic definition of this converter is that:

Current  $i$  = charge  $Q$   $\times$  Frequency  $f$  and

charge  $Q$  = Capacitors  $C$   $\times$  Voltage  $V$ .


This indicates that the stability of the system is given by the charge  $Q$  which is created by means of a very stable ref. voltage  $V$  of  $-10V$  and a number of capacitors  $C$ , which are of different temperature coefficient for max. stability.

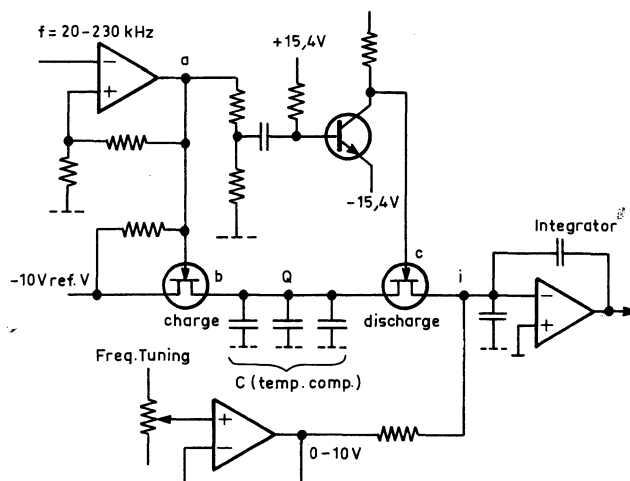

The input frequency  $f$  is applied to a Voltage Comparator which produces the square wave signal  $a$ . When this signal is at 0V the capacitors  $C$  are being charged to the ref. voltage of  $-10V$ .

A charge  $Q$  is now available on the capacitors, and a moment later a discharge is stated by means of the signal  $C$ .

Each charge  $Q$  supplies a certain current into the Integrator and the total current will be proportional to the frequency  $f$ .

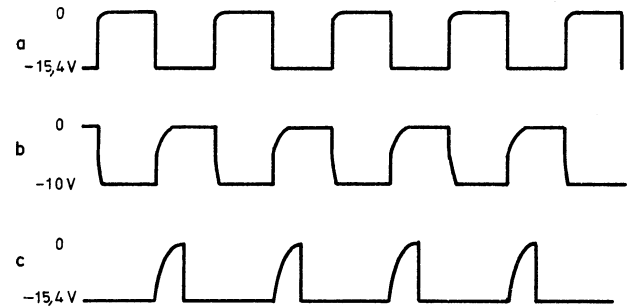


### Lin./Log Converter

When the instrument is in Log position, a Lin./Log converter is inserted between the tuning potentiometer and the VCO.

As it appears from the simplified diagram, a number of transistors are connected in a row with a reference voltage applied to the bases. This reference voltage is increased by approx. 0.5V steps up the row, and the transistors will now be turned on as the Lin. input voltage is increased.


In this way a parabolla is formed like shown on the diagram, yet having 18 steps instead of 3, thus providing a good approximation to a true log curve.

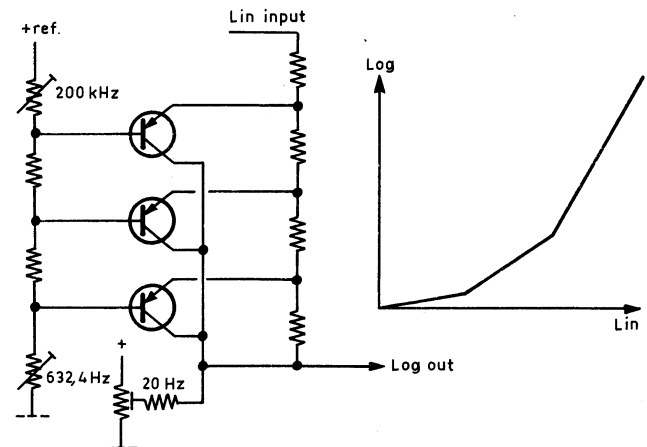

In connection with the Lin./Log Converter, a temperature compensating circuit is used.

V342 is acting as a temperature detector as the forward voltage across it is temperature dependent. The voltage drop across V342 is amplified by V357, the resulting signal being present across R356.

By means of R342 + 355 is now to the Linear input voltage added a voltage which is proportional to the forward voltage across V342 and thus temperature compensated.

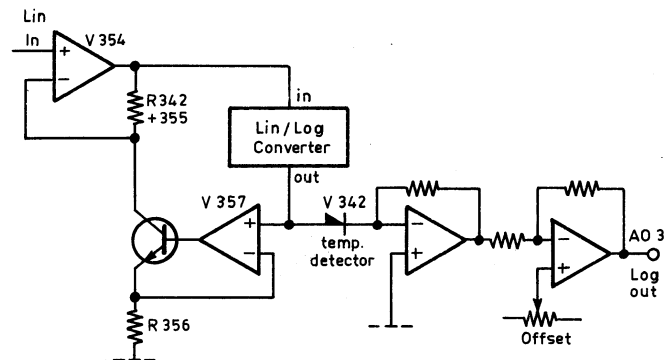

### Frequency Counter

With "Counting Time" positioned at 1 s the principle of operation is as follows:

A Preset sets the Decade Counters to 8000,0 after which the Gate is enabled and the Control Time Base disabled. As the Counting Time Base is actually a 10000 divider the Gate will be enabled for 1 s.

On the trailing edge of impulse no. 10000 the Gate is disabled and the Control Time Base enabled. Impulse no. 10001 generates a Transfer signal which leads the results from the Decade Counters out to the 7-Segment Display through BCD to 7-Segment Decoders/Drivers. The trailing edge of pulse no. 10003 produces a Preset, and the whole procedure is repeated.

When the Decade Counters have been Preset to 8000,0 instead of 0000,0 it is due to the fact that a Gate input of 20 kHz should read 0 Hz and 220 kHz should read 20 kHz. And 20 kHz during 1 s provides exactly 20000 pulses which sets the Decade Counters to 0000,0.

If f. inst. the Gate input is 70 kHz, the number of pulses during 1 s will be 70000 of which the first 20000 are used to set the Decade Counters to 0000,0 so the final result will be 5000,0 Hz on the Frequency Display.

When "Counting Time" is at 0,1 s the counting period is 100 ms only and the Decade Counters will be Preset to 98000 instead.

"Counting Time" 1 s is possible up to approx. 9500,0 Hz only at which frequency a Time Base Cross-Over Circuit on Z1 0032 automatically switches to "Counting Time" 0,1 s.

### Blanking Logic

With "Counting Time" at 0,1 s digit 1 is blanked when it reads 0 and digits 2, 3 and 4 are blanked when they read 0 and when the more significant digit is already is blanked.

At 1 s "Counting Time" only digits 1, 2 and 3 will be blanked if they are 0 thus leaving the two least significant digits on all the time.

All digits are blanked when the frequency is tuned out of range.

### Frequency Marking



By means of a "Frequency Marking" selector on the rear panel it is possible to choose marking intervals controlled by digits 2, 3 or 4.


Outputs from the respective latch are applied to a Monostable Multivibrator in the Frequency Marking Circuit. An inverted and non-inverted input is used to ensure that changes in both directions will trigger the Monostable which has an aoutput impulse of approx. 10 ms.

On the "Frequency Marking" socket on the rear panel a 10 ms signal will be provided each time the selected digit is changing, and a permanent signal is provided whenever the digit is 0.

This output can f. inst. be used to activate the "Event Marker" of a Level Recorder and in this way plot a non-calibrated paper.

There is a 24V sensing circuit which allows Frequency Marking only when a Level Recorder is driving.

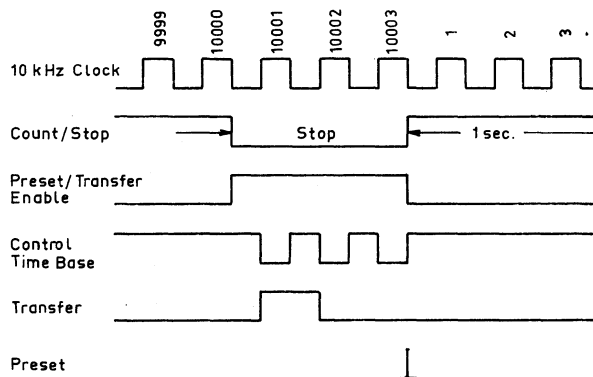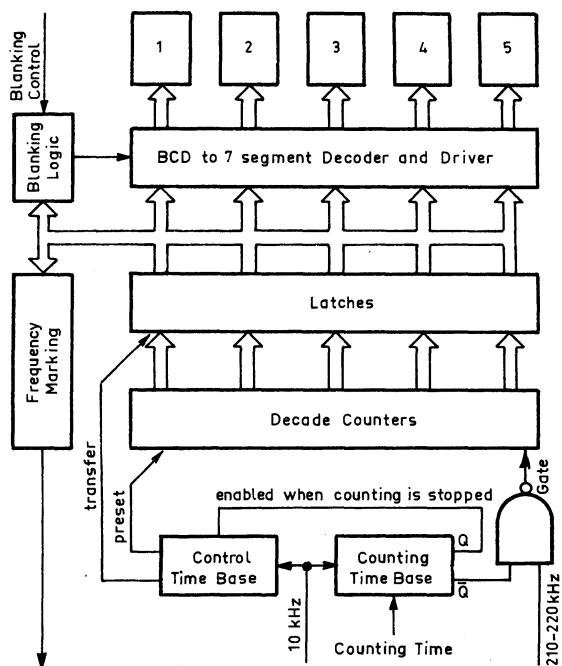

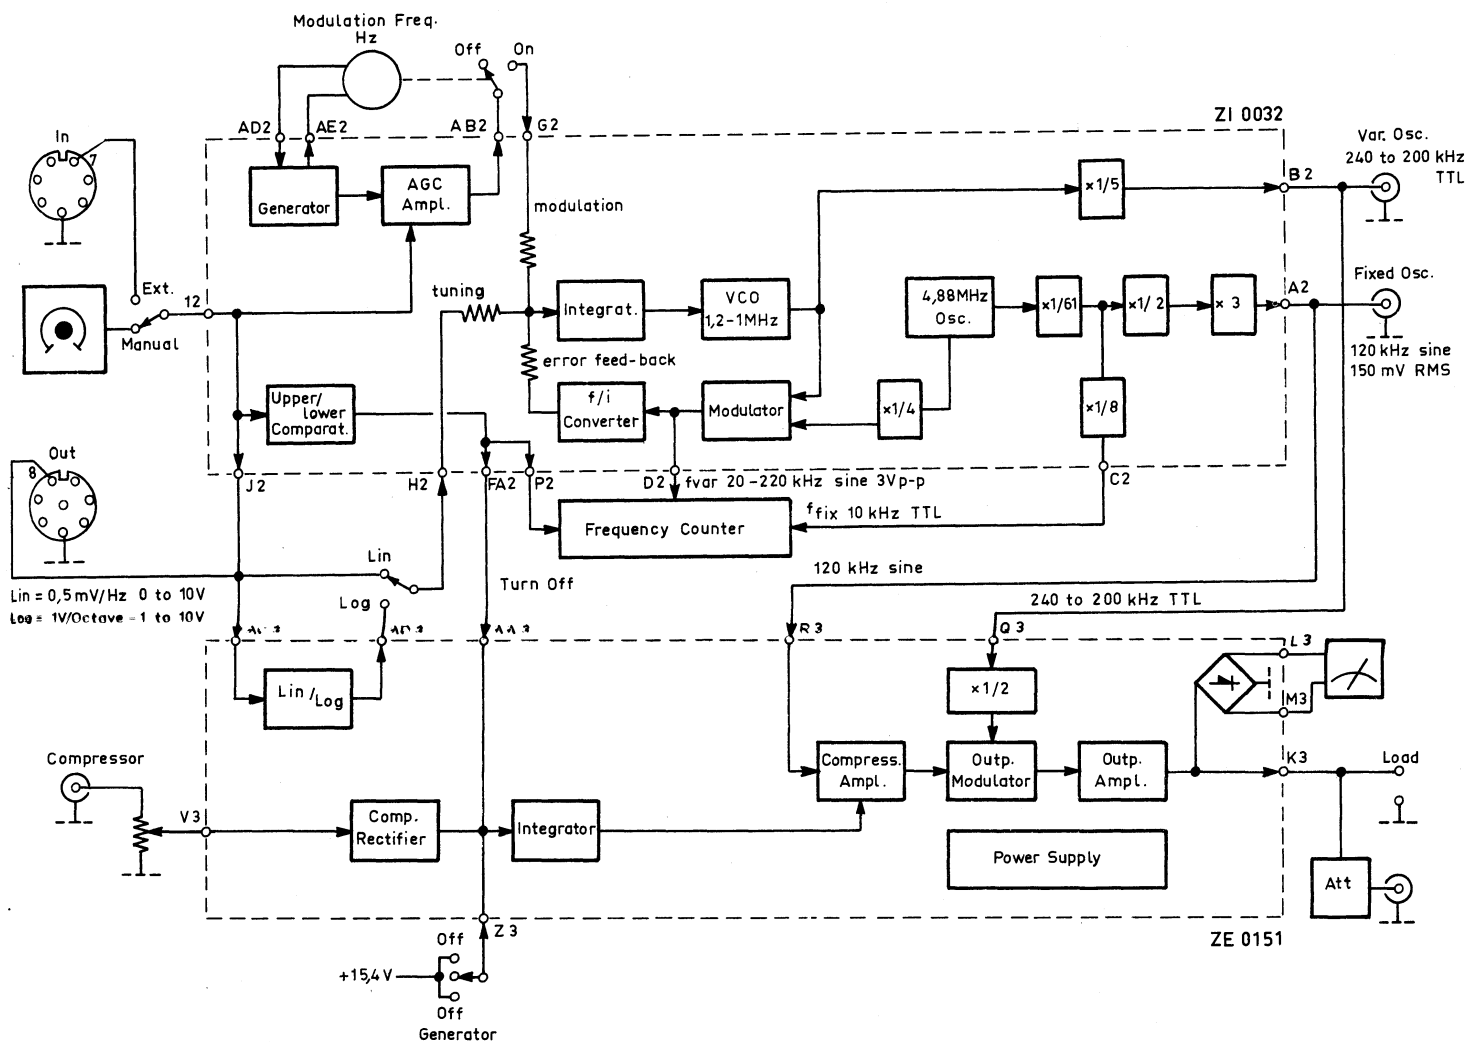

Generator: "On"  
Ref. Signal: "Off"  
Sweep Control: "Manual-Log"  
Compressor Speed: "Off"  
Output Voltage: "5"  
Modulation Frequency: "Off"  
Output Attenuator: "Load"  
Counting Time: "1 s"

rear Frequency Range Adj. "Full"

Ref. Signal to "On"

Ref. Signal to "Off"

Sweep Control to "Manual-Log"

Set Frequency Dial to exactly 10 Hz and adjust Scale Alignment for 10.0 Hz on the Digital Frequency Display.

The Display should now correspond to the position of the Frequency Dial within a tolerance of  $\pm 3\%$  of reading through the whole range.

At approx. 9500.0 Hz the Counting Time is automatically changed to "0,1 s" and the decimal point disappears.

With Sweep Control in "Lin." mode the accuracy between Frequency Dial and Display should be  $\pm 200$  Hz through the range.

The Frequency Display should now read between 970 and 1030 Hz.

Turn Frequency Dial out of range and check on the Meter that the Output signal disappears and that the Frequency Display is blanked.

Connect an RMS reading Voltmeter to "Load" and adjust Output Voltage for 10 V RMS at an output frequency of approx. 1000 Hz.

The 1023 Voltmeter should now read full scale  $\pm 2\%$ .

Reduce Output Voltage to a reading of f. inst.  $-2$  dB and check the frequency response to be within  $\pm 0,2$  dB referred to 1 kHz from 10 Hz to 20 kHz.

Turn Output Voltage to read 10 V RMS deflection on the 1023 Voltmeter at a frequency of 1 kHz.

Connect a  $15 \Omega/10$  W resistor to the "Load" terminals and check that the output voltage does not drop more than 0,2 dB.

Increase Output Voltage and check that the Distortion lamp comes on at an output voltage of approx. 11,5 V RMS into  $15 \Omega$  corresponding to an output current of 0,76 A RMS.



## 1023.2 Checking Procedure

Generator to "Off"

Disconnect the  $15\Omega$  resistor and check the distortion with a Frequency Analyzer like f. inst. Type 2010.

With 10 V RMS on "Load" output the second and third harmonics should remain at least 60 dB below 10 V corresponding to 0,1% of distortion. (At frequencies from 20 Hz to 20 kHz, and 0,15% at 10 Hz).

The remaining noise on "Load" output should be at least 70 dB below 10 V RMS.

Connect "Load" output to the input of a Voltmeter/Amplifier and AC output of the Voltmeter to "Compressor Input" on 1023.

Adjust Output Voltage for a 19 dB deflection on the 10 V range of the Voltmeter/Amplifier.

Compressor Speed to "30 dB/s"

Adjust Compressor Voltage for the same 19 dB deflection corresponding to 0 dB compression.

When increasing the amplification of the Voltmeter/Amplifier by 10 steps to 60 dB, the deflection on the Voltmeter/Amplifier should remain at 19 dB.

At 60 dB of compression the noise from the Compr. Amplifier will cause a slight instable reading which can be avoided by using a selective Voltmeter/Amplifier.

Compressor Speed to "10 dB/s"

Select 60 dB of compression.

When the plug for "Compressor Input" is taken out, the Voltmeter on 1023 will move slowly up to a final deflection of approx.  $-1$  dB, at it should take 4 to 5 s to reach this final deflection.

Compressor Speed to "Off"

Connect an Oscilloscope (Time Base 0,5 ms) to monitor the output signal from 1023 which should be tuned to approx. 1000 Hz.

Modulation Frequency to "1 Hz"

The Oscilloscope should now show a sine wave signal which is changing in frequency + and  $-10\%$  referred to the center frequency of 1000 Hz.

Modulation Frequency to "16 Hz"

The  $\pm 10\%$  frequency deviation should remain but with a much faster repetition.

If any adjustment is found necessary the voltages from the stabilized power supply should be checked as these are a basis for correct adjustment.

However, it should be taken into consideration that if the + 15,4 V supply is adjusted a complete adjustment procedure of the item Frequency and Scale must be carried out.


In many other cases as well, adjustment of one circuit will cause the necessity of other adjustments. Therefore the procedure is parted into main sections with a certain order which must be followed in adjustment as well as knob positions.

Throughout the measurements the common lead should be connected to ground as close to the measuring point as possible in order to avoid errors due to currents in the ground wiring.

It should be noted that components with 100 numbers will be found on Frequency Counter ZD 0118, 200 numbers on Oscillator Circuit ZI 0032, 300 numbers on ZE 0151 while all 400 numbers are chassis mounted.

## DC VOLTAGES

Remove top and bottom plate of the instrument, but leave the circuit boards in place.

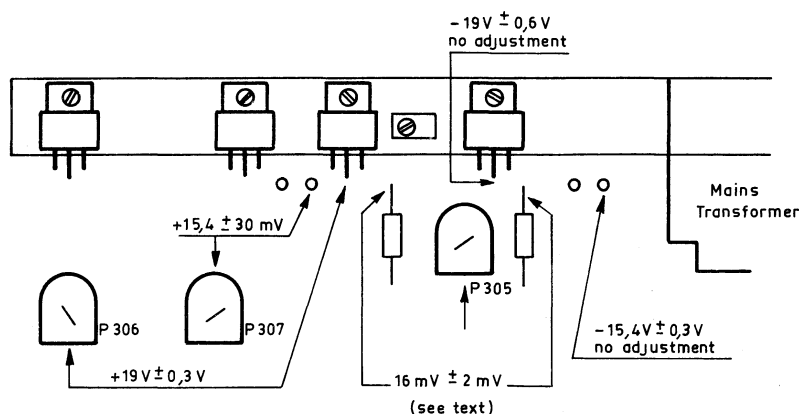

Power: "On"

Check + 19 V  $\pm$  0,3 V and adjust P306 if necessary.

Check - 19 V  $\pm$  0,6 V (no adjustment possibility, but affected by + 19 V).

Check + 15,4 V  $\pm$  30 mV and adjust P307 if necessary.

Check - 15,4 V  $\pm$  0,3 V (no adjustment possibility, but affected by + 15,4 V).

Check + 5 V  $\pm$  0,25 V on the supply rail on the Frequency Counter board.

Output Voltage to "0"

Connect the Voltmeter to the two resistors as shown and adjust P305 if necessary for 16 mV  $\pm$  2 mV (avoid a common ground connection between 1023 and the Voltmeter).

Connect the Voltmeter to the "Load" terminals and adjust P304 for 0 V  $\pm$  10 mV.

## FIXED AND VARIABLE OSCILLATORS

Ref. Signal: "Off"  
Sweep Control: "Manual-Lin."  
Modulation Frequency: "Off"  
Counting Time: "0,1 s"

The Fixed Oscillator is Crystal controlled and not adjustable, while the Variable Oscillator is a voltage controlled LC oscillator where the adjustment of L determines only the range of the oscillator, and not the output frequency and stability.

rear Freq. Range Adj.: "Full"

Thus the following procedure for adjusting the range of the VCO should be used only if a fault has been repaired in one of the two oscillators.

Position the instrument on its right end with the front towards the operator and ZI 0032 swung out on the table.

Connect a Frequency Counter to "Fixed Osc." socket on the rear panel and check the frequency to be 120 kHz  $\pm$  5 Hz.

Turn P208 fully clockwise (from component side) in order to enable a Frequency Display below 5 Hz.

Connect a Digital Voltmeter to ES2 point on ZI 0032.

Turn Frequency Dial down to approx. 0 Hz on the Lin. Scale, and fineadjust for 0 — 2 Hz on the Digital Frequency Display (Use Scale Alignment for fineadjustment).

The DVM should now read 8 V  $\pm$  50 mV and if not adjust L201 from the bottom side of ZI 0032 to such a position where 8 V  $\pm$  50 mV is obtained on the DVM with 0 — 2 Hz on the Digital Display. (Fineadjust Frequency Dial and Scale Alignment if necessary).

## 1023.3 Adjustment Procedure

Ref. Signal: "Off"  
Sweep Control: "Manual-Lin."  
Modulation Frequency: "Off"  
Counting Time: As required

rear Freq. Range Adj.: "Full"

Sweep Control to "Ext. Electr.-Lin."  
Scale Alignment to Mid position

Sweep Control to "Manual-Lin."

Sweep Control to "Manual-Log"

Sweep Control to "Ext. Electr.-Log"

Sweep Control to "Manual-Log"

Sweep Control to "Manual-Lin."

Generator: "On"  
Ref. Signal: "Off"  
Sweep Control: "Manual-Log"  
Compressor Speed: "Off"  
Modulation Frequency: "Off"  
Output Attenuator: "Load"

rear Freq. Range Adj.: "Full"

Output Voltage to "5"

## FREQUENCY AND SCALE

Position the instrument on its right end with the front towards the operator and ZI 0032 swung out on the table.

Connect a Digital Voltmeter to a + 15 V terminal on ZI 0032 (common to closest groundpoint) and fineadjust P307 on ZE 0151 for  $+ 15.4 \text{ V} \pm 30 \text{ mV}$ .

Connect the DVM to point Q2 on ZI 0032 and adjust P202 for  $-1.35 \text{ V} \pm 3 \text{ mV}$ .

Disconnect DVM and swing ZI 0032 back to its proper position as this will ensure a more exact adjustment of the following. All the potentiometers should be adjusted through holes in the bottom, while C273 can be reached from the top.

Now use an 8-pin plug JP 0802 for making a shortconnection between pins 2 and 7 on "Frequency Control Voltage In" socket and another plug for connection of a Digital Voltmeter to pin 8 and 2 (common) on "Freq. Control Voltage Out" socket.

Turn P208 fully counterclockwise (from bottom side).

Adjust P206 for  $0 \text{ V} \pm 1 \text{ mV}$  on the DVM.

Adjust P203 for  $0 \text{ Hz} \pm 1 \text{ Hz}$  on the Frequency Display ( $\sim 0 \text{ V}$  tuning).

Adjust Frequency Dial for  $10 \text{ V} \pm 2 \text{ mV}$  on the DVM and adjust C273 for  $20 \text{ kHz} \pm 20 \text{ Hz}$  on the Frequency Display ( $\sim 10 \text{ V}$  tuning).

When switching between "Ext. Electr." and "Manual" P203 and C273 should be adjusted until 0 V tuning corresponds to  $0 \text{ Hz} \pm 1 \text{ Hz}$  and 10 V tuning corresponds to  $20 \text{ kHz} \pm 20 \text{ Hz}$ .

The Log Converter positioned on ZE 0151 is adjusted as follows:

P303 for  $20 \text{ kHz} \pm 100 \text{ Hz}$  on the Frequency Display.

P301 for  $20 \text{ Hz} \pm 0.2 \text{ Hz}$  on the Frequency Display.

P302 for  $632.4 \text{ Hz} \pm 3.5 \text{ Hz}$  on the Frequency Display with Frequency Dial adjusted to a reading of  $5 \text{ V} \pm 1 \text{ mV}$  on the DVM.

The three adjustments must be repeated as they influence each others.

Tune Frequency Dial to exactly 20 kHz and adjust P207 for  $10 \text{ V} \pm 10 \text{ mV}$  on the DVM or  $20 \text{ kHz} \pm 20 \text{ Hz}$  on the Display.

Tune Frequency Dial to exactly 0 Hz Lin. Scale and adjust P201 for  $0 \text{ V} \pm 1 \text{ mV}$  on the DVM or  $0 \text{ Hz} \pm 2 \text{ Hz}$  on the Display.

The two adjustment must be repeated till both conditions are obtained.

Finally P208 should be adjusted to such a position that an automatic blanking of the Frequency Display takes place at a frequency between 4.5 Hz and 5.5 Hz.

If the tuning potentiometer has been replaced P201 should be set to mid position and the potentiometer mechanically positioned to produce 0 V on the DVM at 0 Hz Lin. on the scale.

## OUTPUT VOLTAGE, METER, MODULATION AND COMPRESSOR

Position the instrument on its right end with the front towards the operator and ZI 0032 swung out on the table.

Connect an Oscilloscope with 1:10 Probe to the junction between R235 and 240 and adjust trimmer C272 for max. which should be approx. 4 V peak to peak.

Connect an RMS Voltmeter to "Fixed Osc." socket.

Now connect a 10 k $\Omega$  resistor across the terminals at L203 and adjust L202 for max. 120 kHz output.

Connect the 10 k $\Omega$  resistor across the terminals at L202 and adjust L203 for max. 120 kHz output.

Finally adjust P204 for 150 mV RMS  $\pm 15 \text{ mV}$  on "Fixed Osc." socket.

With Frequency Dial at approx. 1000 Hz L305 on ZE 0151 should be adjusted for max. deflection on 1023 meter.

Connect an RMS Voltmeter to rear "Load" socket and adjust "Output Voltage" for exactly 10 V RMS on the Voltmeter.

Adjust P308 for 10 V deflection on 1023 Meter.

Change Frequency Dial to 20 kHz and adjust P310 for 10 V — 0.1 dB.

Change Frequency Dial back to approx. 1000 Hz and connect a  $15\Omega/10W$  resistor to the "Load" terminals on the front.

Now P312 should be adjusted to such a position that there is no light in the "Distortion" lamp with 10,5 V RMS on rear "Load" output while at 11,5 V RMS it should start lightening up. (10,5 V into  $15\Omega$  corresponds to 0,7 A).

Disconnect the  $15\Omega$  resistor and connect an Oscilloscope til point AB2 on ZI 0032.

Modulation Frequency to "16 Hz"

With a Frequency Display of 1000 Hz P205 should be adjusted for 1 V peak to peak  $\pm 10\%$ .

Modulation Frequency to "Off"

Adjust "Output Voltage" for a deflection on 1023 of  $-2\text{ dB}$  below full scale.

Compressor Speed to "1000"



Connect "Load" socket to "Compressor Input" and adjust Compressor Voltage for  $-2\text{ dB}$ .

P309 should now be adjusted for  $10,5V \pm 0,2V$  on V351 pin 6 which can be reached only from the bottom side.

Connect "Load" socket to a Selective Voltmeter and adjust for an output signal of 10 V at 1000 Hz.

Generator to "Off"



Adjust C337 for min. 1000 Hz output which should be approx. 80 dB below 10 V.

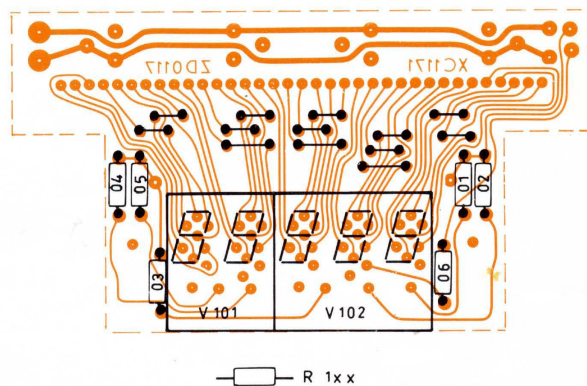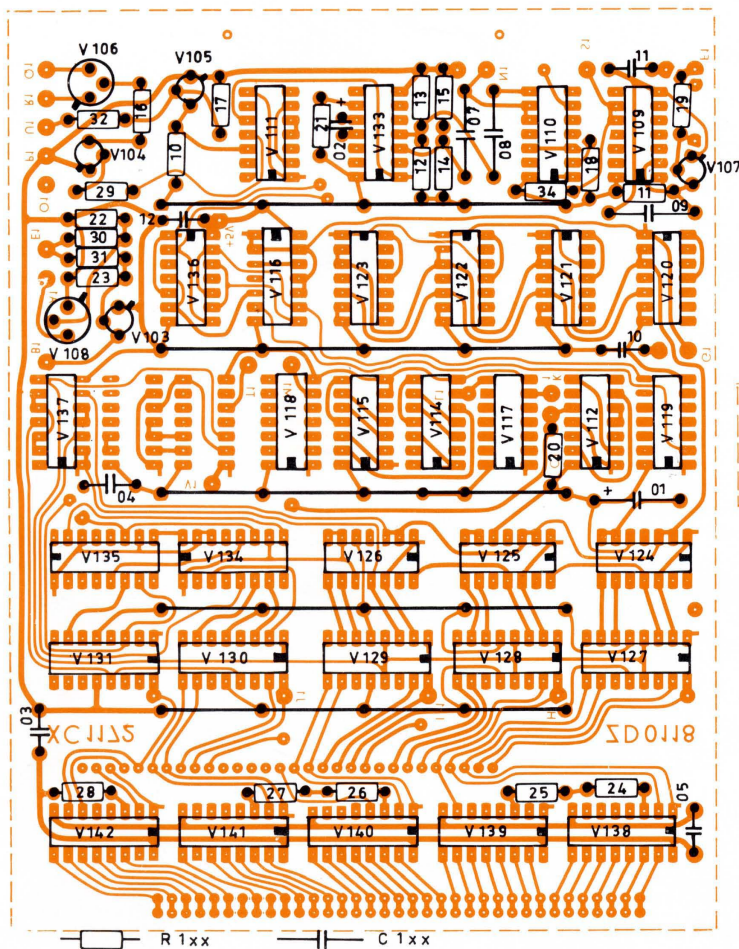



viewed from the component side

| CIRCUIT<br>DIAGRAM<br>REF. | COMPONENT TYPE |              |          |         | STOCK<br>REF. | CIRCUIT<br>DIAGRAM<br>REF. | COMPONENT TYPE            |       |    |        | STOCK<br>REF. |         |
|----------------------------|----------------|--------------|----------|---------|---------------|----------------------------|---------------------------|-------|----|--------|---------------|---------|
| ZD 0118                    |                |              |          |         |               | V 109-112                  | 4 × 2 input NAND gate     |       |    |        | SN 7400       | VD 0002 |
|                            |                |              |          |         |               | V 114,115                  | 4 × 2 input NOR gate      |       |    |        | SN 7402       | VD 0003 |
| C 101                      | Electrolytic   | 22 μF/ 25 V  |          |         | CE 2002       | V 116                      | 3 × 3 input NAND gate     |       |    |        | SN 7410       | VD 0006 |
| C 102                      | Tantalum       | 1,5 μF/ 35 V |          |         | CF 0008       | V 117,118                  | 2 × 4 input NAND gate     |       |    |        | SN 7420       | VD 0007 |
| C 103-105                  | Ceramic        | 47 nF/ 30 V  |          |         | CK 4470       | V 119                      | J-K Flip-Flop             |       |    |        | SN 7472       | VD 0011 |
| C 107,108                  | Polystyrene    | 620 pF/100 V |          |         | CT 1109       | V 120-126                  | Decade Counter            |       |    |        | SN 7490       | VD 0013 |
| C 109                      | -              | 220 pF/125 V |          |         | CT 0501       | V 127-131                  | Bistable Latch            |       |    |        | SN 7475       | VD 0015 |
| C 110-112                  | Ceramic        | 47 nF/ 30 V  |          |         | CK 4470       | V 133                      | Monostable Multivibrator  |       |    |        | SN 74121      | VD 0022 |
|                            |                |              |          |         |               | V 134,135                  | BCD Up/Down Counter       |       |    |        | SN 74192      | VD 0028 |
| R 110                      | Carbon         | 1/4 W        | 5 %      | 1 kΩ    | RB 3100       | V 136                      | J-K Flip-Flop             |       |    |        | SN 74107      | VD 0031 |
| R 111-115                  | -              | -            | -        | 2,2 kΩ  | RB 3220       | V 137                      | 2-input NAND Buffers      |       |    |        | SN 7437       | VD 0047 |
| R 116                      | -              | -            | -        | 3,3 kΩ  | RB 3330       | V 138-142                  | Decoder/driver            |       |    |        | DM 8880       | VD 0060 |
| R 117-120                  | -              | -            | -        | 4,7 kΩ  | RB 3470       |                            | Printed Circuit Board     |       |    |        |               | XC 1172 |
| R 121                      | -              | -            | -        | 8,2 kΩ  | RB 3820       |                            |                           |       |    |        |               |         |
| R 122,123                  | -              | -            | -        | 12 kΩ   | RB 4120       |                            |                           |       |    |        |               |         |
| R 124-128                  | -              | -            | -        | 18 kΩ   | RB 4180       |                            |                           |       |    |        |               |         |
| R 129                      | -              | -            | -        | 27 kΩ   | RB 4270       |                            |                           |       |    |        |               |         |
| R 130,131                  | -              | -            | -        | 39 kΩ   | RB 4390       | ZD 0117                    |                           |       |    |        |               |         |
| R 132                      | -              | -            | -        | 47 kΩ   | RB 4470       |                            |                           |       |    |        |               |         |
| R 133                      | -              | -            | -        | 470 kΩ  | RB 5470       | R 101-105                  | Carbon                    | 1/4 W | 5% | 2,2 kΩ | RB 3220       |         |
| R 134                      | -              | -            | -        | 4,7 kΩ  | RB 3470       | R 106                      | -                         | -     | -  | 1 MΩ   | RB 6100       |         |
|                            |                |              |          |         |               |                            |                           |       |    |        |               |         |
| V 103-105                  | Silicon        | NPN          | BC 107   | VB 0032 |               | V 101                      | 2-Digit 7-Segment Display |       |    |        |               | VA 0097 |
| V 106                      | -              | PNP          | 2 N 2905 | VB 0059 |               | V 102                      | 3-Digit 7-Segment Display |       |    |        |               | VA 0098 |
| V 107                      | -              | NPN          | BSX 20   | VB 0513 |               |                            |                           |       |    |        |               |         |
| V 108                      | -              | -            | BF 337   | VB 0545 |               |                            | Printed Circuit Board     |       |    |        |               | XC 1171 |


200V

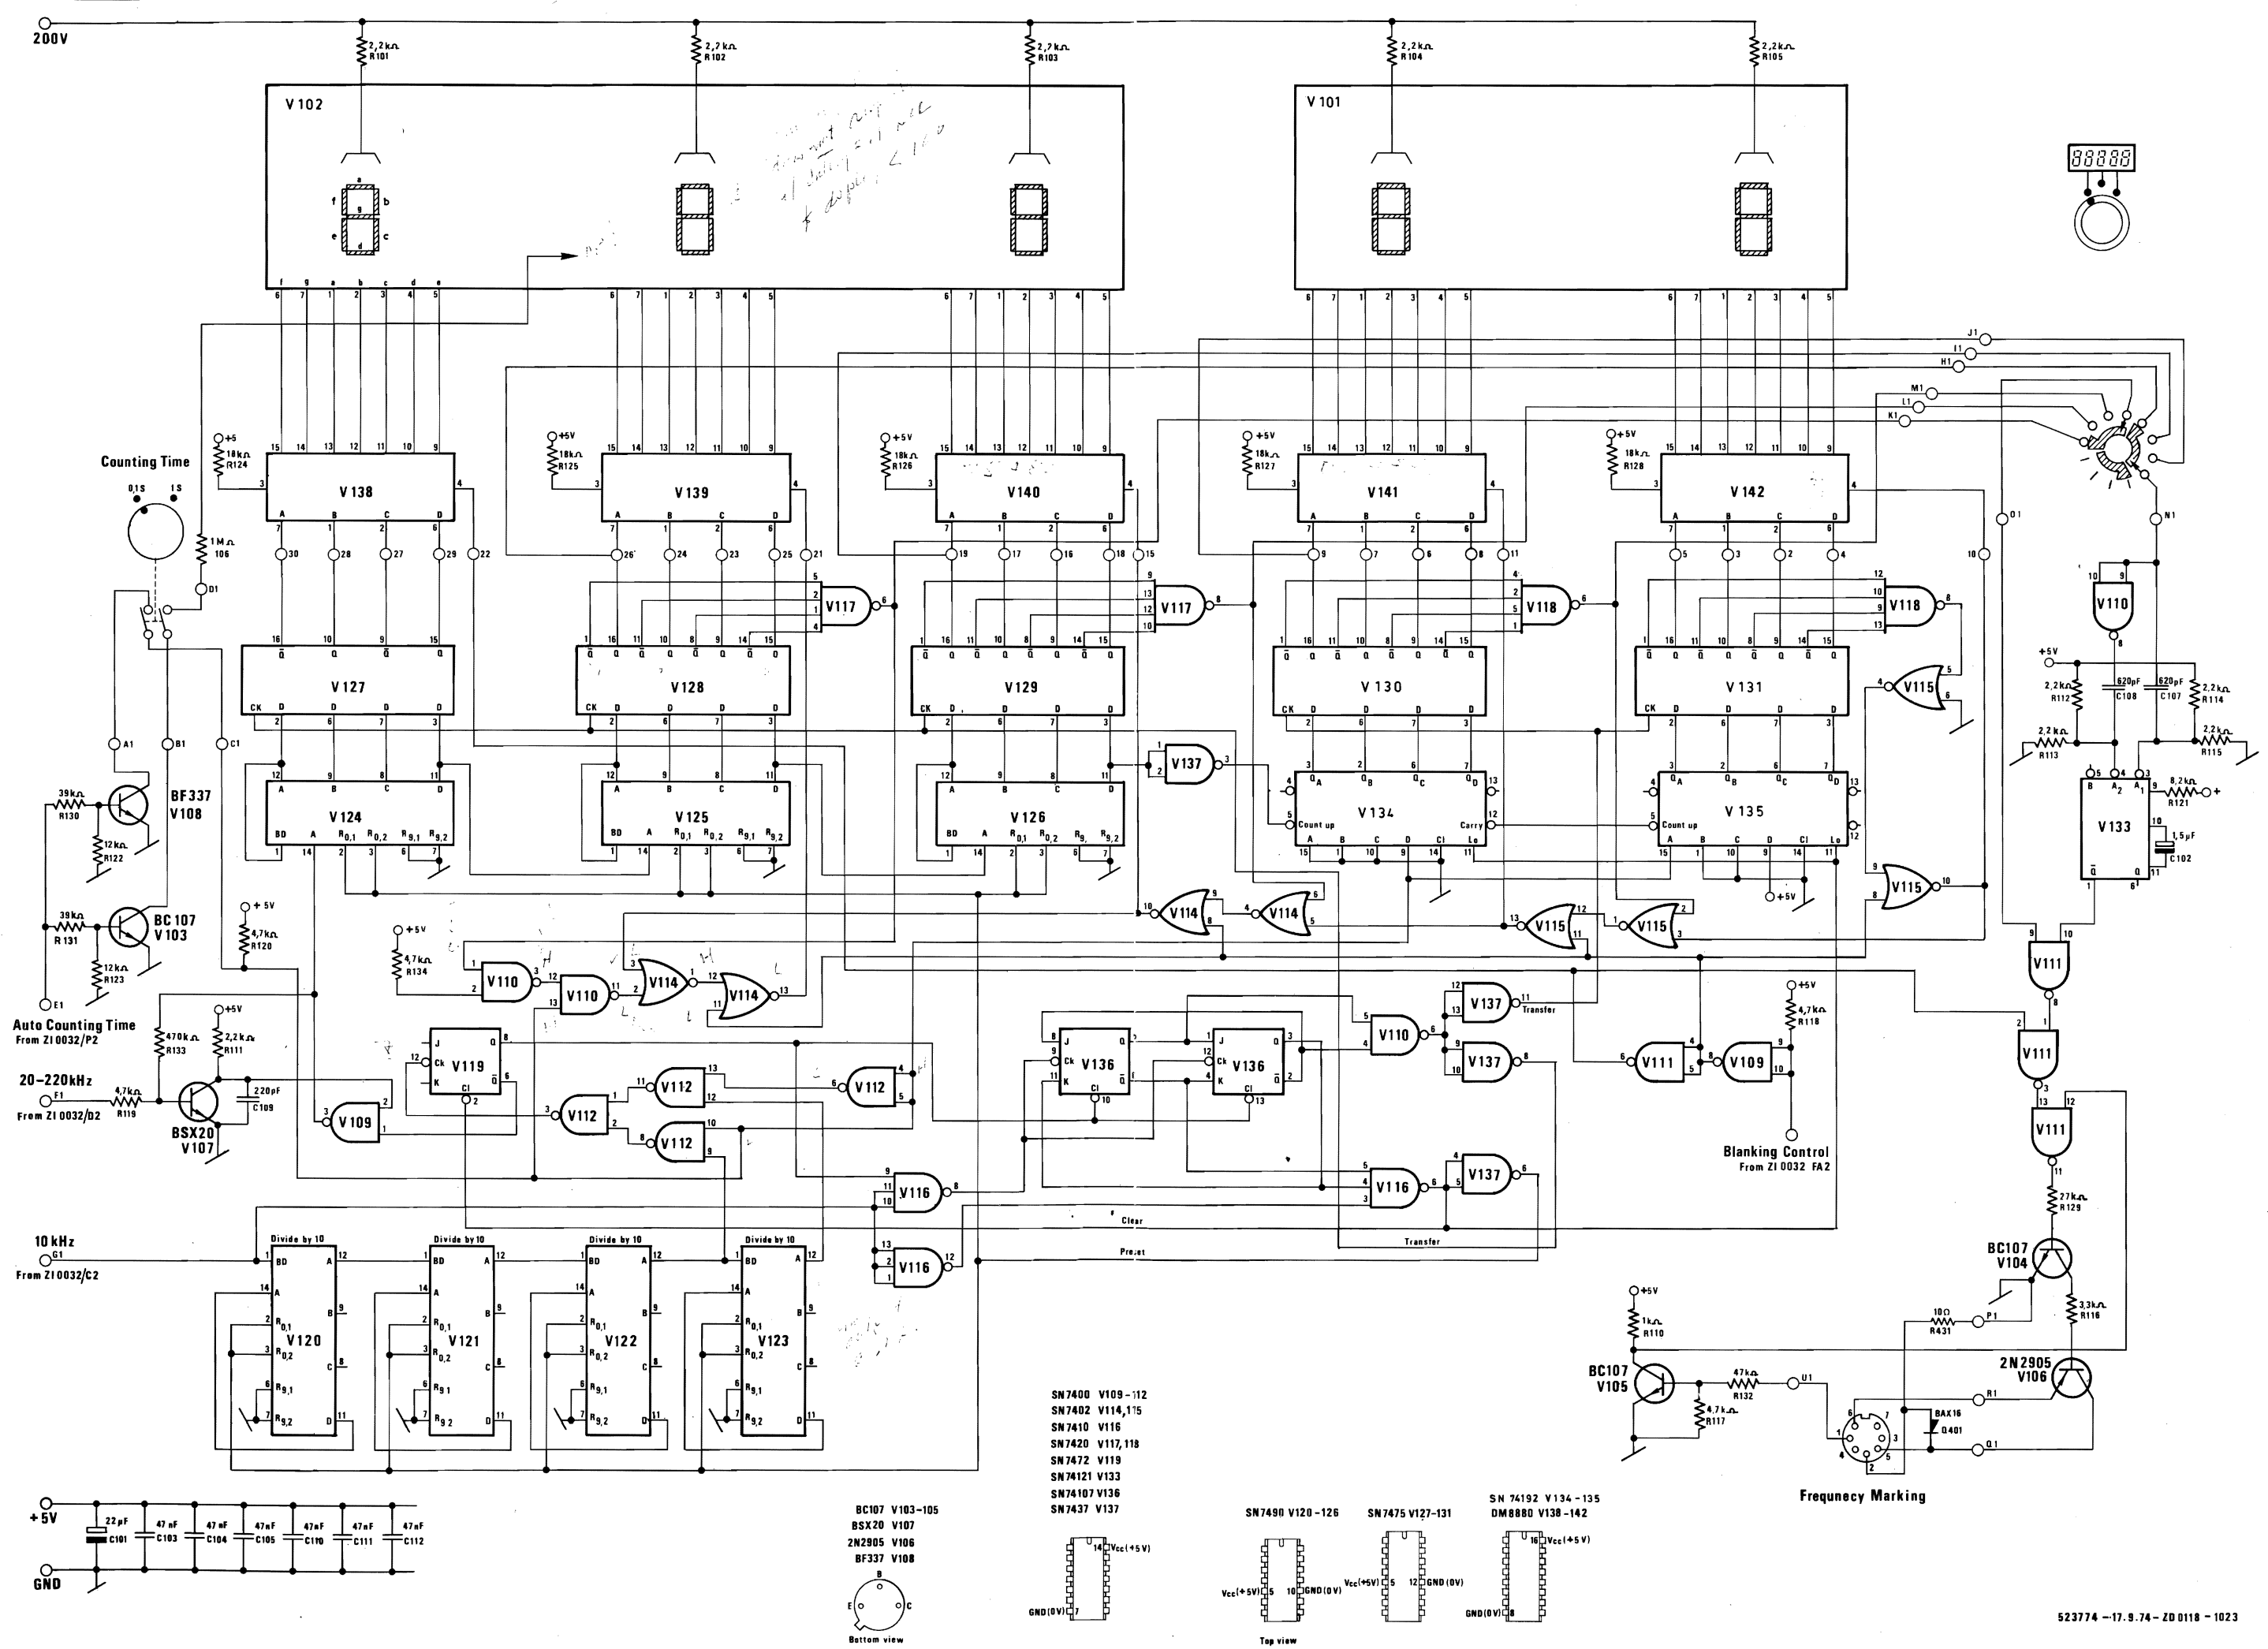

- SN7400 V109-V112
- SN7402 V114, V115
- SN7410 V116
- SN7420 V117, V118
- SN7472 V119
- SN74121 V133
- SN74107 V136
- SN7437 V137

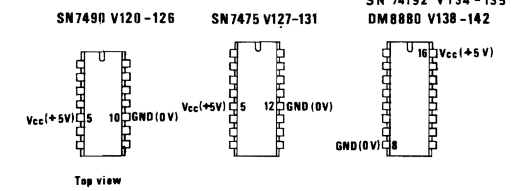









|           |               |                    |         |           |             |          |      |                   |         |
|-----------|---------------|--------------------|---------|-----------|-------------|----------|------|-------------------|---------|
| C 301     | Electrolytic  | 220 $\mu$ F/ 6 V   | CE 0208 | L 301     | Coil        |          |      | 30 $\mu$ H        | LJ 0008 |
| C 302,303 | -             | 100 $\mu$ F/ 16 V  | CE 0310 | L 302,303 | -           |          |      | 112 mH            | LB 0852 |
| C 304     | -             | 4700 $\mu$ F/ 16 V | CE 0336 | L 304     | -           |          |      | 52 mH             | LB 0851 |
| C 305-307 | -             | 10 $\mu$ F/ 25 V   | CE 0416 | L 305     | Transformer |          |      |                   | LB 0853 |
| C 308,309 | -             | 2200 $\mu$ F/ 40 V | CE 0433 |           |             |          |      |                   |         |
| C 310     | -             | 100 $\mu$ F/ 40 V  | CE 0443 | P 301,302 | Trimmer     | Cermet   | lin. | 22 $\Omega$       | PG 0222 |
| C 311     | -             | 47 $\mu$ F/ 50 V   | CE 8965 | P 303     | -           | -        | -    | 100 $\Omega$      | PG 1105 |
| C 312     | Ceramic       | 15 pF/400 V        | CK 1150 | P 304     | -           | -        | -    | 220 $\Omega$      | PG 1221 |
| C 313     | Electrolytic  | 1 $\mu$ F/350 V    | CE 0512 | P 305     | -           | -        | -    | 470 $\Omega$      | PG 1509 |
| C 314,315 | Tantalum      | 1,5 $\mu$ F/ 35 V  | CF 0008 | P 306,307 | -           | -        | -    | 1 k $\Omega$      | PG 2108 |
| C 316     | Ceramic       | 10 pF/400 V        | CK 1100 | P 308     | -           | -        | -    | 10 k $\Omega$     | PG 3109 |
| C 317-319 | -             | 15 pF/400 V        | CK 1150 | P 309     | -           | -        | -    | 22 k $\Omega$     | PG 3221 |
| C 320     | -             | 10 pF/400 V        | CK 1100 | P 310     | -           | -        | -    | 4,7 k $\Omega$    | PG 2470 |
| C 321-324 | -             | 33 pF/400 V        | CK 1330 | P 312     | -           | -        | -    | 470 $\Omega$      | PG 1504 |
| C 325     | Polycarbonate | 1 $\mu$ F/ 50 V    | CS 0241 |           |             |          |      |                   |         |
| C 326     | -             | 4,7 $\mu$ F/100 V  | CS 0387 | Q 301-304 | Si.         | BYX 10   |      | 1200 V/150 mA     | QV 0025 |
| C 327,328 | -             | 22 nF/250 V        | CS 0400 | Q 307-310 | Ge.         | AAZ 17   |      | 50 V/250 mA       | QV 0101 |
| C 329     | -             | 47 nF/250 V        | CS 0401 | Q 311-318 | Si.         | 1 N 5402 |      | 200 V/ 3 A        | QV 0212 |
| C 330     | Polystyrene   | 400 pF/160 V       | CT 1011 | Q 319,320 | -           | BAX 16   |      | 150 V/300 mA      | QV 0217 |
| C 331     | -             | 620 pF/100 V       | CT 1109 | Q 321-323 | -           | 1 N 4004 |      | 400 V/ 1 A        | QV 0237 |
| C 332,333 | -             | 180 pF/125 V       | CT 1140 | Q 325,326 | Zener       | 1 N 754  |      | 6,0-7,5 V/0,4 W   | QV 1106 |
| C 334     | -             | 12 nF/ 63 V        | CT 1514 | Q 327,328 | -           | ZM 12    |      | 11,4-12,6 V/1 W   | QV 1353 |
| C 335,336 | -             | 50 pF/ 63 V        | CT 1530 | Q 329     | -           | 1 N 3155 |      | 8,0-8,8 V/0,4 W   | QV 1329 |
| C 337     | Trimmer       | 2,5-5 pF/ 63 V     | CV 0033 | Q 330     | -           | ZF 15    |      | 13,8-15,5 V/0,4 W | QV 1325 |
| C 338     | Ceramic       | 3,9 pF/400 V       | CK 0390 | Q 331     | -           | ZPD 22   |      | 20,8-23,2 V/0,4 W | QV 1348 |
| C 339     | Polycarbonate | 47 nF/250 V        | CS 0401 |           |             |          |      |                   |         |
| C 340     | Ceramic       | 33 pF/400 V        | CK 1330 |           |             |          |      |                   |         |
| C 341     | Tantalum      | 33 $\mu$ F/ 10 V   | CF 0034 |           |             |          |      |                   |         |

ZE 0151



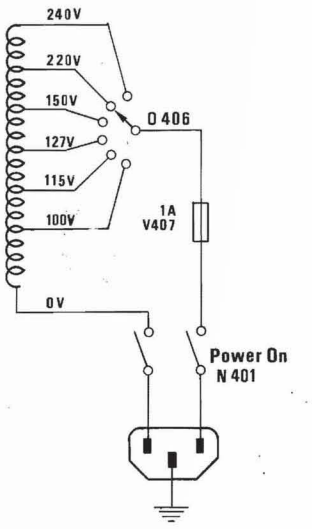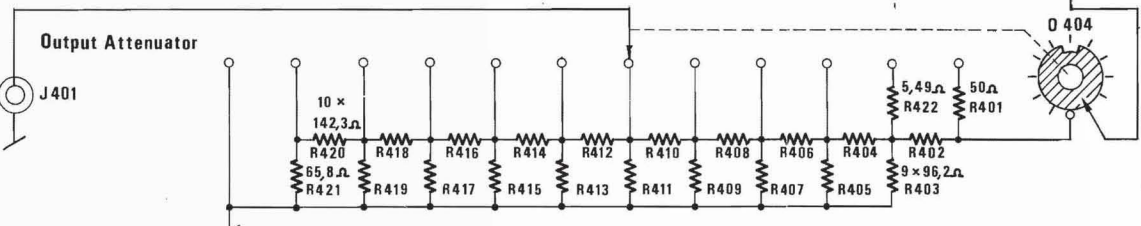


- LM318 V360,361  
LM725 V359



|           |            |       |     |         |         |           |                       |     |          |         |
|-----------|------------|-------|-----|---------|---------|-----------|-----------------------|-----|----------|---------|
| R 301     | Carbon     | 1/4 W | 5%  | 10 Ω    | RB 1100 | V 301-303 | Silicon               | NPN | BC 107   | VB 0032 |
| R 303     | -          | -     | -   | 10 Ω    | RB 1100 | V 304     | -                     | -   | -        | VB 0257 |
| R 304     | -          | -     | -   | 39 Ω    | RB 1390 | V 305-307 | -                     | -   | -        | VB 0032 |
| R 306     | -          | -     | -   | 120 Ω   | RB 2120 | V 308     | -                     | -   | -        | VB 0257 |
| R 307     | -          | -     | -   | 560 Ω   | RB 2560 | V 309,310 | -                     | -   | -        | VB 0032 |
| R 308,309 | -          | -     | -   | 1 kΩ    | RB 3100 | V 311     | -                     | PNP | 2 N 2905 | VB 0059 |
| R 310     | -          | -     | -   | 1,2 kΩ  | RB 3120 | V 312     | -                     | NPN | BF 199   | VB 0065 |
| R 311     | -          | -     | -   | 1,8 kΩ  | RB 3180 | V 313-315 | -                     | PNP | BC 177   | VB 0071 |
| R 313,314 | -          | -     | -   | 2,2 kΩ  | RB 3220 | V 316     | -                     | NPN | BC 107   | VB 0032 |
| R 315     | -          | -     | -   | 3,3 kΩ  | RB 3330 | V 318-320 | -                     | PNP | 2 N 4249 | VB 0108 |
| R 316     | -          | -     | -   | 3,9 kΩ  | RB 3390 | V 321,322 | -                     | NPN | BC 107   | VB 0257 |
| R 317     | -          | -     | -   | 6,8 kΩ  | RB 3680 | V 323     | -                     | -   | BCY 87   | VB 5302 |
| R 318,319 | -          | -     | -   | 10 kΩ   | RB 4100 | V 324-342 | (Matched set)         | -   | 2N4249   | VB 0114 |
| R 320     | -          | -     | -   | 12 kΩ   | RB 4120 | V 343-345 | -                     | NPN | TIP 110  | VB 0555 |
| R 321,322 | -          | -     | -   | 15 kΩ   | RB 4150 | V 346-348 | -                     | PNP | TIP 115  | VB 0115 |
| R 323,324 | -          | -     | -   | 18 kΩ   | RB 4180 | V 350     | J-K Flip-Flop         | -   | SN 7472  | VD 0011 |
| R 325     | -          | -     | -   | 2,7 kΩ  | RB 3270 | V 351     | Op. amp.              | -   | LM 308   | VE 0046 |
| R 326     | -          | -     | -   | 3,3 kΩ  | RB 3330 | V 352-356 | -                     | -   | LM 301   | VE 0044 |
| R 327     | -          | -     | -   | 10 kΩ   | RB 4100 | V 357,358 | -                     | -   | LM 308   | VE 0046 |
| R 328     | -          | -     | -   | 68 kΩ   | RB 4680 | V 359     | -                     | -   | LM 725   | VE 0047 |
| R 329     | -          | -     | -   | 82 kΩ   | RB 4820 | V 360,361 | -                     | -   | LM 318   | VE 0050 |
| R 331,332 | -          | -     | -   | 100 kΩ  | RB 5100 |           |                       |     |          |         |
| R 333     | -          | -     | 10% | 1,8 MΩ  | RB 6180 |           |                       |     |          |         |
| R 334     | -          | -     | 5%  | 4,7 kΩ  | RB 3470 |           |                       |     |          |         |
| R 340,341 | Metal      | -     | 1%  | 10,2 Ω  | RF 1102 |           |                       |     |          |         |
| R 342     | -          | -     | -   | 61,9 Ω  | RF 1619 |           |                       |     |          |         |
| R 343     | -          | -     | -   | 24,9 Ω  | RF 1249 |           |                       |     |          |         |
| R 344,345 | -          | -     | -   | 100 Ω   | RF 2100 |           |                       |     |          |         |
| R 346     | -          | -     | -   | 150 Ω   | RF 2150 |           |                       |     |          |         |
| R 347-352 | -          | -     | -   | 1 kΩ    | RF 3100 |           |                       |     |          |         |
| R 353     | -          | -     | -   | 1,13 kΩ | RF 3113 |           |                       |     |          |         |
| R 354     | -          | -     | -   | 1,24 kΩ | RF 3124 |           |                       |     |          |         |
| R 355,356 | -          | -     | -   | 1,50 kΩ | RF 3150 |           |                       |     |          |         |
| R 357,358 | -          | -     | -   | 1,58 kΩ | RF 3158 |           |                       |     |          |         |
| R 359     | -          | -     | -   | 1,69 kΩ | RF 3169 |           |                       |     |          |         |
| R 360,361 | -          | -     | -   | 2,80 kΩ | RF 3280 |           |                       |     |          |         |
| R 362,363 | -          | -     | -   | 3,01 kΩ | RF 3301 |           |                       |     |          |         |
| R 364     | -          | -     | -   | 3,65 kΩ | RF 3365 |           |                       |     |          |         |
| R 365     | -          | -     | -   | 4,12 kΩ | RF 3412 |           |                       |     |          |         |
| R 366-369 | -          | -     | -   | 5,11 kΩ | RF 3511 |           |                       |     |          |         |
| R 370     | -          | -     | -   | 5,90 kΩ | RF 3590 |           |                       |     |          |         |
| R 371     | -          | -     | -   | 1,78 kΩ | RF 3178 |           |                       |     |          |         |
| R 372     | -          | -     | -   | 7,50 kΩ | RF 3750 |           |                       |     |          |         |
| R 373     | -          | -     | -   | 7,15 kΩ | RF 3715 |           |                       |     |          |         |
| R 374-381 | -          | -     | -   | 10,2 kΩ | RF 4102 |           |                       |     |          |         |
| R 382     | -          | -     | -   | 10,7 kΩ | RF 4107 |           |                       |     |          |         |
| R 383     | -          | -     | -   | 10,5 kΩ | RF 4105 |           |                       |     |          |         |
| R 384-386 | -          | -     | -   | 10,7 kΩ | RF 4107 |           |                       |     |          |         |
| R 387,388 | -          | -     | -   | 12,1 kΩ | RF 4121 |           |                       |     |          |         |
| R 389-391 | -          | -     | -   | 15,4 kΩ | RF 4154 |           |                       |     |          |         |
| R 392     | -          | -     | -   | 40,2 kΩ | RF 4402 |           |                       |     |          |         |
| R 393     | -          | -     | -   | 20,5 kΩ | RF 4205 |           |                       |     |          |         |
| R 395,396 | -          | -     | -   | 30,1 kΩ | RF 4301 |           |                       |     |          |         |
| R 397     | -          | -     | -   | 32,4 kΩ | RF 4324 |           |                       |     |          |         |
| R 398     | -          | -     | -   | 45,3 kΩ | RF 4453 |           |                       |     |          |         |
| R 399     | -          | -     | -   | 71,5 kΩ | RF 4715 |           |                       |     |          |         |
| R 3100-02 | -          | -     | -   | 95,3 kΩ | RF 4953 |           |                       |     |          |         |
| R 3103    | -          | -     | -   | 137 kΩ  | RF 5137 |           |                       |     |          |         |
| R 3104,05 | -          | -     | -   | 191 kΩ  | RF 5191 |           |                       |     |          |         |
| R 3106    | -          | -     | -   | 280 kΩ  | RF 5280 |           |                       |     |          |         |
| R 3107,08 | -          | -     | -   | 301 kΩ  | RF 5301 |           |                       |     |          |         |
| R 3109,10 | Wire       | 1 W   | 5%  | 0,8 Ω   | RO 1103 |           |                       |     |          |         |
| R 3111,12 | -          | 2 W   | 10% | 0,33 Ω  | RO 1220 |           |                       |     |          |         |
| R 3113,14 | -          | 3 W   | 5%  | 610 Ω   | RX 0323 |           |                       |     |          |         |
| R 3115    | Thick film | -     | -   | -       | RZ 0024 |           |                       |     |          |         |
| R 3116    | -          | -     | -   | -       | RZ 0025 |           |                       |     |          |         |
| R 3117    | NTC        | 0,5 W | -   | 470 Ω   | RN 0015 |           |                       |     |          |         |
|           |            |       |     |         |         |           | Printed Circuit Board |     |          | XC 1174 |
|           |            |       |     |         |         |           | 8-pin Socket          |     |          | JJ 0804 |
|           |            |       |     |         |         |           | 16-pin Socket         |     |          | JJ 1622 |




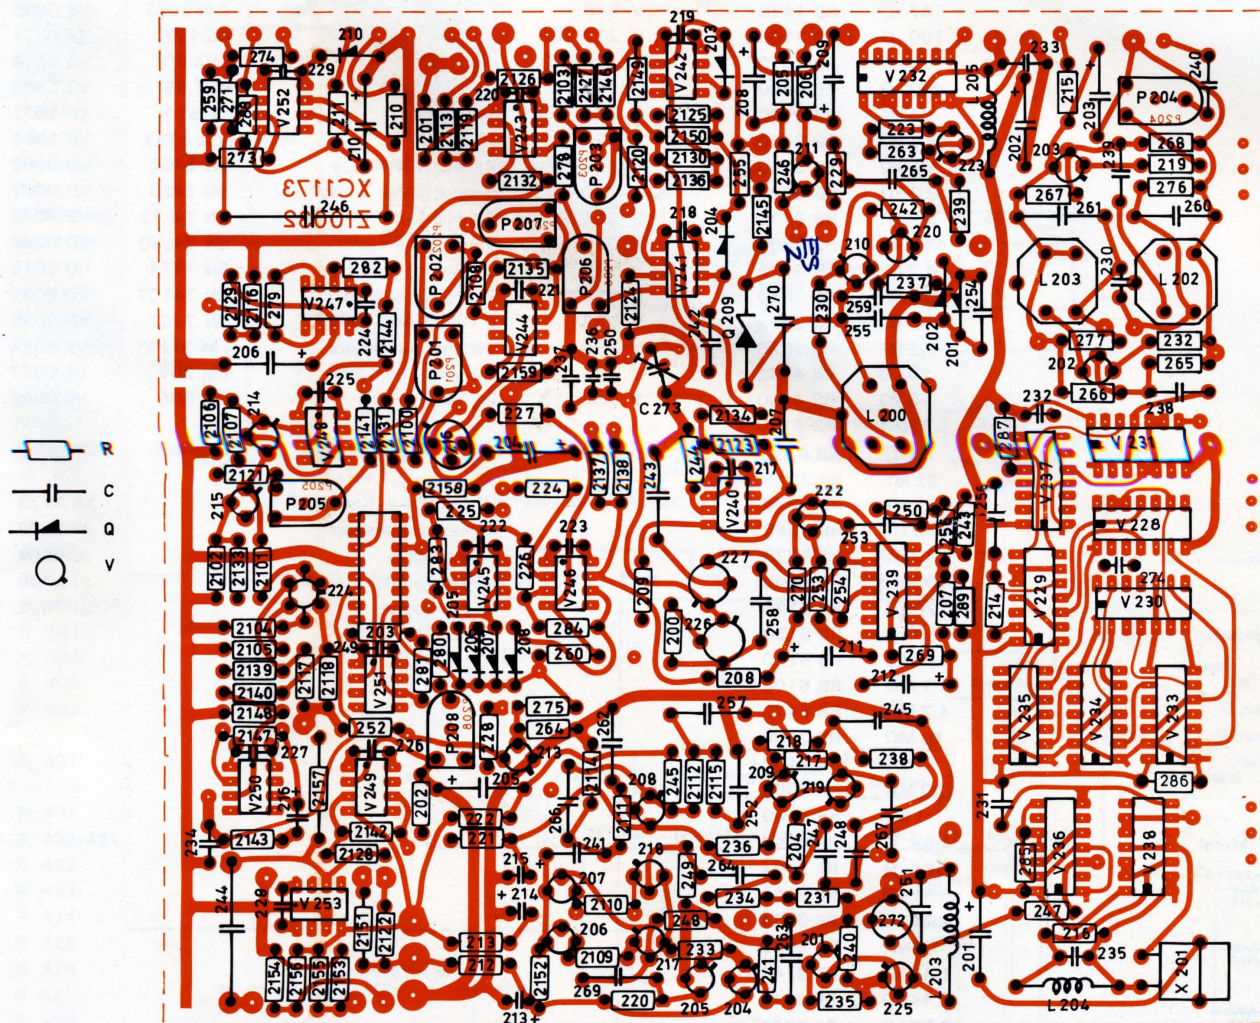

viewed from the component side

|           |               |                  |         |            |              |                  |                       |
|-----------|---------------|------------------|---------|------------|--------------|------------------|-----------------------|
| C 201-212 | Electrolytic  | 22 $\mu$ F/ 25 V | CE 2002 | C 266, 267 | Polystyrene  | 1 nF/ 63 V       | CT 1170               |
| C 213-216 | Tantalum      | 22 $\mu$ F/ 16 V | CF 0031 | C 269      | -            | 4,7 nF/ 63 V     | CT 1508               |
| C 217-229 | Ceramic       | 33 pF/400 V      | CK 1330 | C 270      | -            | 22 nF/ 63 V      | CT 1517               |
| C 230     | -             | 6,8 pF/400 V     | CK 0681 | C 271      | Ceramic      | 12 pF/400 V      | CK 0095               |
| C 231-234 | -             | 47 nF/ 12 V      | CK 4471 | C 272      | Trimmer      | 5-25 pF/ 50 V    | CV 0025               |
| C 235     | -             | 30 pF/400 V      | CK 0105 | C 273      | -            | 1,5-3,5 pF/500 V | CV 0021               |
| C 236     | -             | 4 pF/400 V       | CK 0097 | C 274      | Ceramic      | 33 pF/400 V      | CK 1330               |
| C 237     | Mica          | 450 pF/350 V     | CM 0004 |            |              |                  |                       |
| C 238-240 | Polycarbonate | 10 nF/250 V      | CS 0394 | L 200      | Coil         |                  | LB 0707               |
| C 241     | -             | 100 nF/100 V     | CS 0409 | L 202,203  | -            |                  | LB 0769               |
| C 242     | -             | 220 nF/100 V     | CS 0389 | L 204      | Filter Choke | 30 $\mu$ H       | LJ 0008               |
| C 243     | -             | 1 $\mu$ F/100 V  | CS 0384 | L 205      | -            | 6 $\mu$ H        | LJ 0010               |
| C 244     | Polystyrene   | 1 $\mu$ F/ 50 V  | CS 0241 | L 206      | -            | 160 $\mu$ H      | LJ 0016               |
| C 245     | Polycarbonate | 470 nF/100 V     | CS 0383 |            |              |                  |                       |
| C 246     | -             | 10 $\mu$ F/ 63 V | CS 0399 | P 201      | Trimmer      | Cermet lin.      | 22 $\Omega$ PG 0222   |
| C 247,248 | -             | 47 nF/250 V      | CS 0401 | P 202      | -            | -                | 100 $\Omega$ PG 1105  |
| C 249     | Ceramic       | 33 pF/400 V      | CK 1330 | P 203      | -            | -                | 500 $\Omega$ PG 1510  |
| C 250     | -             | 30 pF/400 V      | CK 0502 | P 204, 205 | -            | -                | 1 k $\Omega$ PG 2108  |
| C 251     | Polystyrene   | 92 pF/ 63 V      | CT 1550 | P 206      | -            | -                | 22 k $\Omega$ PG 3221 |
| C 252-255 | -             | 100 pF/125 V     | CT 1133 | P 207      | -            | -                | 100 $\Omega$ PG 1105  |
| C 256-258 | -             | 220 pF/125 V     | CT 1141 | P 208      | -            | -                | 22 k $\Omega$ PG 3221 |
| C 259     | -             | 250 pF/100 V     | CT 1117 |            |              |                  |                       |
| C 260,261 | -             | 560 pF/ 63 V     | CT 1122 | Q 201-208  | Silicon      | 1 N 4148         | 75 V/ 75 mA QV 0216   |
| C 262     | -             | 402 pF/100 V     | CT 1115 | Q 209      | VDC          | 1 N 3023         | QV 1332               |
| C 263-265 | -             | 470 pF/100 V     | CT 1111 | Q 210      | Silicon      | 1 N 4148         | 75 V/ 75 mA QV 0216   |





|           |        |       |     |         |         |           |                       |     |          |         |
|-----------|--------|-------|-----|---------|---------|-----------|-----------------------|-----|----------|---------|
| R 200-202 | Carbon | 1/8 W | 10% | 10 MΩ   | RB 7100 | V 201-211 | Silicon               | NPN | BC 107   | VB 0032 |
| R 203     | -      | 1/4 W | 5%  | 33 Ω    | RB 1330 | V 213-215 | -                     | -   | -        | VB 0032 |
| R 204     | -      | -     | -   | 47 Ω    | RB 1470 | V 216     | -                     | PNP | 2 N 2905 | VB 0059 |
| R 205-215 | -      | -     | -   | 100 Ω   | RB 2100 | V 217-220 | -                     | -   | BC 177   | VB 0071 |
| R 216     | -      | -     | -   | 270 Ω   | RB 2270 | V 222,223 | -                     | NPN | BSX 20   | VB 0513 |
| R 217,218 | -      | -     | -   | 680 Ω   | RB 2680 | V 224     | -                     | -   | BCY 89   | VB 5304 |
| R 219-228 | -      | -     | -   | 1 kΩ    | RB 3100 | V 225     | FET                   | N   | NF 510   | VB 1021 |
| R 229     | -      | -     | -   | 1,2 kΩ  | RB 3120 | V 226,227 | -                     | -   | 2 N 4393 | VB 1056 |
| R 230     | -      | -     | -   | 1,5 kΩ  | RB 3150 | V 228,229 | 2-input NOR-Gates     | -   | SN 7400  | VD 0002 |
| R 231-234 | -      | -     | -   | 2,2 kΩ  | RB 3220 | V 230     | 4-input NAND-Gates    | -   | SN 7420  | VD 0007 |
| R 235-237 | -      | -     | -   | 3,3 kΩ  | RB 3330 | V 231     | J-K Flip-Flop         | -   | SN 74L72 | VD 0049 |
| R 238,239 | -      | -     | -   | 3,9 kΩ  | RB 3390 | V 232     | Decade-Counter        | -   | SN 74L90 | VD 0050 |
| R 240-242 | -      | -     | -   | 4,7 kΩ  | RB 3470 | V 233-235 | D-Flip-Flop           | -   | SN 7474  | VD 0018 |
| R 243,244 | -      | -     | -   | 5,6 kΩ  | RB 3560 | V 236,237 | Dual J-K Flip-Flop    | -   | SN 74107 | VD 0031 |
| R 245     | -      | -     | -   | 6,8 kΩ  | RB 3680 | V 238     | 2-input NAND Buffer   | -   | SN 7437  | VD 0042 |
| R 246     | -      | -     | -   | 8,2 kΩ  | RB 3820 | V 239     | Voltage Comparator    | -   | LM 311   | VE 0024 |
| R 247-250 | -      | -     | -   | 10 kΩ   | RB 4100 | V 240-251 | Op.-Amp.              | -   | LM 301   | VE 0017 |
| R 252-254 | -      | -     | -   | 10 kΩ   | RB 4100 | V 252,253 | Op.-Amp.              | -   | LM 308   | VE 0046 |
| R 255     | -      | -     | -   | 12 kΩ   | RB 4120 |           |                       |     |          |         |
| R 256     | -      | -     | -   | 15 kΩ   | RB 4150 | X 201     | Quartz-Crystal        | -   | 4,88 MHz | MB 0012 |
| R 259     | -      | -     | -   | 22 kΩ   | RB 4220 |           |                       |     |          |         |
| R 260     | -      | -     | -   | 27 kΩ   | RB 4270 |           | Printed Circuit Board | -   |          | XC 1173 |
| R 263     | -      | -     | -   | 56 kΩ   | RB 4560 |           | Socket for transistor | -   |          | JY 0007 |
| R 264     | -      | -     | -   | 82 kΩ   | RB 4820 |           | 8-pin Socket          | -   |          | JJ 0804 |
| R 265-270 | -      | -     | -   | 100 kΩ  | RB 5100 |           | 14-pin Socket         | -   |          | JJ 1408 |
| R 271     | -      | -     | -   | 120 kΩ  | RB 5120 |           | 16-pin Socket         | -   |          | JJ 1622 |
| R 273     | -      | -     | -   | 150 kΩ  | RB 5150 |           |                       |     |          |         |
| R 274,275 | -      | -     | -   | 220 kΩ  | RB 5220 |           |                       |     |          |         |
| R 276,277 | -      | -     | -   | 1 MΩ    | RB 6100 |           |                       |     |          |         |
| R 278-280 | -      | -     | -   | 4,7 MΩ  | RB 6470 |           |                       |     |          |         |
| R 281     | -      | -     | -   | 10 MΩ   | RB 7100 |           |                       |     |          |         |
| R 282     | -      | -     | -   | 1 kΩ    | RB 3100 |           |                       |     |          |         |
| R 283,284 | -      | -     | -   | 20 MΩ   | RH 0903 |           |                       |     |          |         |
| R 285-289 | -      | -     | -   | 1 kΩ    | RB 3100 |           |                       |     |          |         |
| R 2100    | Metal  | -     | 1%  | 4,99 Ω  | RF 0499 |           |                       |     |          |         |
| R 2101,02 | -      | -     | -   | 464 Ω   | RF 2464 |           |                       |     |          |         |
| R 2103-05 | -      | -     | -   | 1 kΩ    | RF 3100 |           |                       |     |          |         |
| R 2106,07 | -      | -     | -   | 1,24 kΩ | RF 3124 |           |                       |     |          |         |
| R 2108    | -      | -     | -   | 1,3 kΩ  | RF 3130 |           |                       |     |          |         |
| R 2109-11 | -      | -     | -   | 1,43 kΩ | RF 3143 |           |                       |     |          |         |
| R 2112    | -      | -     | -   | 2,49 kΩ | RF 3249 |           |                       |     |          |         |
| R 2113    | -      | -     | -   | 9,53 kΩ | RF 3953 |           |                       |     |          |         |
| R 2114    | -      | -     | -   | 2,87 kΩ | RF 3287 |           |                       |     |          |         |
| R 2115    | -      | -     | -   | 4,32 kΩ | RF 3432 |           |                       |     |          |         |
| R 2116    | -      | -     | -   | 4,87 kΩ | RF 3487 |           |                       |     |          |         |
| R 2117,18 | -      | -     | -   | 5,11 kΩ | RF 3511 |           |                       |     |          |         |
| R 2119    | -      | -     | -   | 5,62 kΩ | RF 3562 |           |                       |     |          |         |
| R 2120    | -      | -     | -   | 7,15 kΩ | RF 3715 |           |                       |     |          |         |
| R 2121    | -      | -     | -   | 9,53 kΩ | RF 3953 |           |                       |     |          |         |
| R 2122    | -      | -     | -   | 121 Ω   | RF 2121 |           |                       |     |          |         |
| R 2123-28 | -      | -     | -   | 10 kΩ   | RF 4100 |           |                       |     |          |         |
| R 2129    | -      | -     | -   | 10,5 kΩ | RF 4105 |           |                       |     |          |         |
| R 2130    | -      | -     | -   | 12,7 kΩ | RF 4127 |           |                       |     |          |         |
| R 2131    | -      | -     | -   | 13,3 kΩ | RF 4133 |           |                       |     |          |         |
| R 2132    | -      | -     | -   | 15 kΩ   | RF 4150 |           |                       |     |          |         |
| R 2133    | -      | -     | -   | 16,5 kΩ | RF 4165 |           |                       |     |          |         |
| R 2134,35 | -      | -     | -   | 15,4 kΩ | RF 4154 |           |                       |     |          |         |
| R 2136    | -      | -     | -   | 17,8 kΩ | RF 4178 |           |                       |     |          |         |
| R 2137,38 | -      | -     | -   | 21,5 kΩ | RF 4215 |           |                       |     |          |         |
| R 2139,40 | -      | -     | -   | 30,1 kΩ | RF 4301 |           |                       |     |          |         |
| R 2141    | -      | -     | -   | 40 kΩ   | RF 0279 |           |                       |     |          |         |
| R 2142    | -      | -     | -   | 40,2 kΩ | RF 4402 |           |                       |     |          |         |
| R 2143,44 | -      | -     | -   | 49,9 kΩ | RF 4499 |           |                       |     |          |         |
| R 2145-48 | -      | -     | -   | 100 kΩ  | RF 5100 |           |                       |     |          |         |
| R 2149    | -      | -     | -   | 130 kΩ  | RF 5130 |           |                       |     |          |         |
| R 2150    | -      | -     | -   | 150 kΩ  | RF 5150 |           |                       |     |          |         |
| R 2151    | -      | -     | -   | 158 kΩ  | RF 5158 |           |                       |     |          |         |
| R 2152    | -      | -     | -   | 2,87 kΩ | RF 3287 |           |                       |     |          |         |
| R 2153,54 | -      | -     | -   | 549 Ω   | RF 2549 |           |                       |     |          |         |
| R 2155,56 | -      | -     | -   | 12,1 kΩ | RF 4121 |           |                       |     |          |         |
| R 2157    | -      | -     | -   | 400 kΩ  | RF 0205 |           |                       |     |          |         |
| R 2158    | -      | -     | -   | 4,42 kΩ | RF 3442 |           |                       |     |          |         |
| R 2159    | -      | -     | -   | 5,23 kΩ | RF 3523 |           |                       |     |          |         |

| CIRCUIT<br>DIAGRAM<br>REF. | COMPONENT TYPE         |                |       | STOCK<br>REF.     | CIRCUIT<br>DIAGRAM<br>REF. | COMPONENT TYPE                         |                          |  | STOCK<br>REF. |
|----------------------------|------------------------|----------------|-------|-------------------|----------------------------|----------------------------------------|--------------------------|--|---------------|
| C 401                      | Electrolytic           | 22 $\mu$ F/    | 25 V  | CE 2002           |                            | Moving coil instrument                 | 200 $\mu$ A/100 $\Omega$ |  | IM 0065       |
| J 401,402                  | B & K socket           |                |       | JJ 0108           |                            | "Load" Binding Posts                   |                          |  | JK 6272       |
| J 403-407                  | Socket, BNC            |                |       | JJ 0130           |                            | Socket for Mains Connection            |                          |  | OA 0042       |
| J 408,409                  | Socket, DIN 7-pin      |                |       | JJ 0709           |                            | Mains Lead                             |                          |  | AN 0010       |
| J 410,411                  | Socket, DIN 8-pin      |                |       | JJ 0802           |                            | Cover for Power Switch                 |                          |  | DD 0169       |
| N 401                      | Power Switch           |                |       | NN 0014           |                            | Frequency Scale                        |                          |  | SA 0192       |
| N 402,403                  | Sweep Control          |                |       | NN 0049           |                            | Glass for above                        |                          |  | SG 0047       |
| N 404,405                  | Generator, Ref. Signal |                |       | NN 0050           |                            | Frame for above                        |                          |  | SØ 0033       |
| N 406                      | Manual Freq. Control   |                |       | NT 0032           |                            | Glass for above                        |                          |  | SG 0045       |
| O 401                      | Counting Time          |                |       | NN 0214           |                            | Pointer for above                      |                          |  | SV 0051       |
| O 402                      | Modulation Frequency   |                |       | OE 0136           |                            | Glass for Counter                      |                          |  | SG 0046       |
| O 403                      | Compressor Speed       |                |       | OE 0137           |                            | Knob, Scale Alignment                  |                          |  | SN 1022       |
| O 404                      | Output Attenuator      |                |       | OE 0138           |                            | Knob, Counting Time                    |                          |  | SN 1025       |
| O 405                      | Frequency Marking      |                |       | OH 3037           |                            | Knob, Frequency Marking                |                          |  | SN 2007       |
| O 406                      | Mains Voltage Selector |                |       | JS 0001           |                            | Knob, 20 mm                            |                          |  | SN 2022       |
| P 401,402                  | Frequency Range Adj.   | 5 k $\Omega$   |       | PG 2518           |                            | Knob, 25 mm                            |                          |  | SN 2522       |
| P 403                      | Manual Freq. Control   | 2,2 k $\Omega$ |       | PD 2200           |                            | Knob, 40 mm                            |                          |  | SN 4021       |
| P 404                      | Scale Alignment        | 220 $\Omega$   |       | PP 1200           |                            | Insert for above knobs                 |                          |  | DB 0674       |
| P 405                      | Compressor Voltage     | 25 k $\Omega$  |       | PP 3253           |                            | Screw for above insert                 |                          |  | YQ 2083       |
| P 406                      | Output Voltage         | 20 k $\Omega$  |       | PQ 3201           |                            |                                        |                          |  |               |
| Q 401                      | Silicon BAX 16         | 150 V/300 mA   |       | QV 0217           |                            | Mains Transformer                      |                          |  | TN 1007       |
| R 401                      | Wire                   | 5 W            | 1%    | 50 $\Omega$       | RO 0813                    | Worm Wheel                             |                          |  | DG 0311       |
| R 402-421                  | Matched Set            |                |       |                   | RO 1006                    | Thumb Wheel                            |                          |  | SN 0067       |
| R 422                      | Metal                  | 1/4 W          | 1%    | 5,49 $\Omega$     | RF 0549                    | Socket for Lamp                        |                          |  | JO 0038       |
| R 423                      | -                      | -              | -     | 4,22 k $\Omega$   | RF 3422                    | Banana Socket                          |                          |  | JT 6204       |
| R 424                      | -                      | -              | -     | 16,2 k $\Omega$   | RF 4162                    | Stand-off                              |                          |  | XL 0163       |
| R 425                      | -                      | -              | -     | 57,6 k $\Omega$   | RF 4576                    |                                        |                          |  |               |
| R 426                      | -                      | -              | -     | 178 k $\Omega$    | RF 5178                    |                                        |                          |  |               |
| R 427                      | Carbon                 | 1/3 W          | -     | 62,5 k $\Omega$   |                            |                                        |                          |  |               |
| R 428                      | -                      | -              | -     | 158,49 k $\Omega$ |                            |                                        |                          |  |               |
| R 429                      | -                      | -              | -     | 398,11 k $\Omega$ |                            |                                        |                          |  |               |
| R 430                      | -                      | -              | -     | 1,00 M $\Omega$   |                            |                                        |                          |  |               |
| R 431                      | -                      | 1/4 W          | 5%    | 10 $\Omega$       | RB 1100                    |                                        |                          |  |               |
| V 401                      | + 5 V Regulator        |                |       | LM 309            | VE 0022                    | Display Circuit                        |                          |  | ZD 0117       |
| V 402                      | Distortion lamp        | 24 V/          | 40 mA |                   | VS 0020                    | Frequency Counter Circuit              |                          |  | ZD 0118       |
| V 403-406                  | Panel lamp             | 6,8 V/250 mA   |       |                   | VS 1273                    | Amplifier/Rectifier/Compressor Circuit |                          |  | ZE 0151       |
| V 407                      | Fuse                   | 220 V/0,25 A   |       |                   | VF 0031                    | Oscillator Circuit                     |                          |  | ZI 0032       |
|                            |                        | 115 V/0,5 A    |       |                   | VF 0023                    |                                        |                          |  |               |

Furthermore 1023 contains the following Sub-assemblies the details of which will be found under the respective numbers.

On page 0—2 will be found an exploded view of the instrument showing details and stock ref. numbers of the cabinet parts.



