


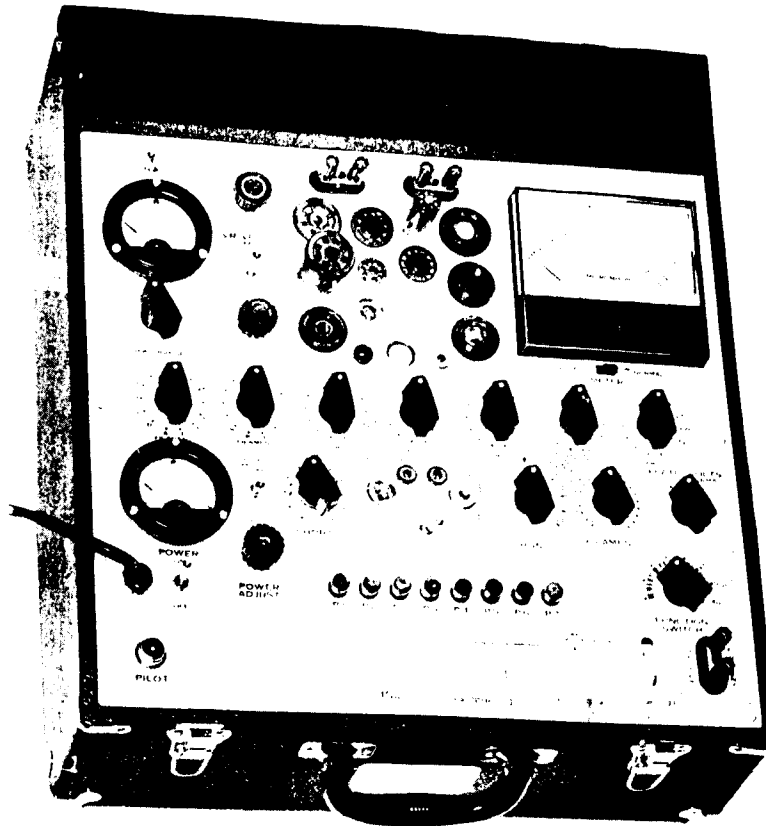

TEST DATA
FOR
MODELS 539B & 539C
TUBE TESTERS

© THE HICKOK ELECTRICAL INSTRUMENT CO.—
10514 DUPONT AVENUE • CLEVELAND, OHIO 44108

PHONE — 541-8060
TWX — CV 662

CABLE — HICKOK, CLEVELAND
WESTERN UNION — KJ

GENERAL TEST DATA

For further information see

OBSOLETE TUBE TYPES

FOREIGN TUBE TYPES

NOTES

Note 1: The letter, in the column that precedes the Mutual Conductance Reading, indicates the setting for the Function Switch.

Note 2: A * in the Bias column indicates Bias should be set at 40 Volts and proper button pressed while Bias control is rotated until tube strikes. The striking voltages on the chart are nominal values and reference to handbook critical grid characteristic thyratron curves will reveal appreciable variations from these average values.

Note 3: A star ★ indicates Emission Test only and good tubes should read above mark, Rectifiers and Diodes O.K.

Note 4: Mutual Conductance Values are minimum. Discard tubes which read lower.

Note 5: Adjust Bias Volts after P4 is pressed for Mutual Conductance Readings.

Note 6: A symbol (♣) in the Notations column indicates that Short on Position A is normal.

Note 7: A symbol (‡) to the right of the tube type indicates that for TUBE TESTER Model 539B, the Universal Adapter CA-5, 1050-164, is available for testing tubes with the more recent type basings, such as, Compactrons, Novars, 5 and 7-pin Nuvistors and the new 10-pin tubes, including Decals. The CA-4, 1050-135 Adapter (Discontinued) can still be used, but requires the use of the SA-11, 1050-177 Adapter for testing Decal types. Test data for these tubes is supplied in supplementary form with the adapters.

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT PRESS	MIN. MUT. COND.	NOTATIONS
0A2	Off AP-0502-0	---	---	P4	H	150v Starts at about 15V Regulation=3 Volts From 5 to 30 MA	2AF4	2.5 ET-2105-0	1.4	---	P4	C	4200 Plate Volts=Low
0A3/VR75	Off AP-0502-0	---	---	P4	H	75v Starts at about 100 V Regulation=3 Volts From 5 to 40 MA	2AH2†	2.5 B3-0000-0	0.0	0	P5	G	Cap=P
0B2	Off AP-0502-0	---	---	P4	H	108v Starts at about 115V Regulation=3 Volts From 5 to 30 MA	2AS2†	2.5 B3-0000-0	0.0	0	P5	G	Cap=P
0B3/VR90	Off AP-0502-0	---	---	P4	H	90v Starts at about 105V Regulation=3 Volts From 5 to 30 MA	2AV2	2.0 EV-0900-0	0.0	0	P5	G	Cap=P
0C2	Off AP-0502-0	---	---	P4	H	75v Starts at about 105V Regulation=3 Volts From 5 to 30 MA	2BA2	2.0 BS-0000-0	0.0	35	P5	G	Cap=P
0C3/VR105	Off AP-0502-0	---	---	P4	H	75v Starts at about 105V Regulation=3 Volts From 5 to 30 MA	2BJ2	2.0 EV-0100-0	0.0	46	P5	G	Cap=P
0D3/VR150	Off AP-0502-0	---	---	P4	H	105v Starts at about 115V Regulation=3 Volts From 5 to 40 MA	2BN4	2.5 BS-0000-0	0.0	23	P5	G	Cap=P
0E3/85A1	Off AP-0208-0	---	---	P4	H	150v Starts at about 160V Regulation=3 Volts From 5 to 40 MA	2BU2†	2.0 ET-2501-0	1.9	---	P4	C	4300
0G3/85A2	Off AP-0102-0	---	---	P4	H	85v Starts at about 120V Regulation=3 Volts From 1 to 8MA	2BN4A	2.0 ET-2501-0	2.4	---	P4	C	5000
0Z4	Off AP-0508-0	0.0	91	P2	G	85v Starts at about 125V Regulation=3 Volts From 1 to 10 MA	2C51	2.5 B3-0000-0	0.0	12	P5	G	Cap=P
1A3	1.4 HR-0203-0	0.0	---	P1	D	---	2C51	6.3 KR-7608-2	2.0	---	P4	C	3150 Triode No. 1
1AD2†	1.4 B3-0000-0	0.0	---	P5	C	---	2C51	6.3 KR-3402-8	2.0	---	P4	C	3150 Triode No. 2
1AD4	1.1 DV-4120-0	1.0	---	P4	D	---	2CN3A	2.0 HS-0000-0	0.0	20	P5	G	Cap=P
1AG4	1.1 DV-4120-0	4.3	---	P4	D	---	Model 539C	2.0 DR-4208-0	0.5	---	P4	C	5000 Plate Volts=Low. Use Adapter SA-3, 1050-127. Note 7
1AH4	1.1 FT-4120-0	1.7	---	P4	D	---	2CW4†	2.0 13-4208-0	0.5	---	P4	C	5000 Plate Volts=Low
1AK4	1.1 FT-4120-0	1.0	---	P4	D	---	2CY5	2.5 ET-1562-0	1.0	---	P4	C	2800 Plate Volts=Low
1AU2	1.1 EV-0900-0	0.0	0	P5	D	---	2D21	6.3 ET-1602-5	#	89	P5	G	Strikes at about 1.8 V.
1AY2	1.1 CX-0000-0	0.0	27	P5	G	---	2DF4	2.5 EV-8310-0	4.8	---	P4	D	Short on Pos. 1-2-A-B
1B3	1.1 HS-0000-0	0.0	12	P5	G	---	2DS4†	2.0 DR-4202-0	0.4	---	P4	C	4700 Plate Volts=Low. Use Adapter SA-3, 1050-127. Note 7
1BC2	1.1 BV-0000-0	0.0	10	P5	G	---	Model 539C	2.0 13-4208-0	0.4	---	P4	C	4700 Plate Volts=Low
1BH2	1.1 DW-0000-0	0.0	10	P5	G	---	2DS4	2.0 13-4208-0	0.8	---	P4	C	7000 Plate Volts=Low
1BK2	1.4 BS-0000-0	0.0	14	P5	G	---	2DV4†	2.0 13-6207-0	0.8	---	P4	C	5350
1BX2	1.4 BS-0000-0	0.0	12	P5	G	---	2DX4	2.5 ET-2105-0	3.6	---	P4	C	3500
1BY2†	1.1 B3-0000-0	0.0	---	P5	C	---	2EA5	2.5 ET-1562-0	1.2	---	P4	C	3000
1DG3	1.1 DY-0000-0	0.0	---	P5	C	---	2EG4†	2.0 DR-4208-0	1.7	---	P4	C	3000
1D-K29	1.1 BS-0000-0	0.0	---	P3	B	---	Model 539C	2.0 13-4208-0	1.7	---	P4	C	3000
1G3	1.1 HS-0000-0	0.0	12	P5	G	---	2EG4	2.0 ET-0705-6	0.0	0	P1	G	Star "Power Adjust" at 91V. Note 7
1H2	1.4 BS-0000-0	0.0	0	P5	G	---	2EN5	2.0 ET-0205-6	0.0	0	P1	G	Star "Power Adjust" at 91V. Note 7
1K3	1.1 HS-0000-0	0.0	---	P5	G	---	2ER5	2.0 ET-2567-0	0.8	---	P4	C	6600
1N2	1.1 HS-0000-0	0.0	12	P5	G	---	2ES5	2.5 ET-2501-0	1.0	---	P4	C	4500
1R5	1.4 BX-6234-0	2.0	---	P4	E	---	2EV5	2.5 ET-1562-0	1.2	---	P4	C	5500
1R5	1.4 BX-4306-2	2.0	---	P4	E	---	2FH5	2.5 ET-2507-0	1.0	---	P4	C	5500
1R-K23	1.4 ES-0000-0	0.0	14	P5	G	---	2FO5	2.5 ET-2507-6	1.2	---	P4	C	5000
1S2A	1.4 ES-0000-0	0.0	14	P5	G	---	2FQ5A	2.5 ET-2507-6	1.2	---	P4	C	6500
1S4	1.4 BX-3240-0	4.5	---	P4	E	---	2FS5	2.5 ET-1567-0	0.2	---	P4	C	5500
1S5	1.4 BX-6540-0	1.0	---	P1	D	---	2FV6	2.5 ET-1567-2	2.0	---	P4	C	3500
1U4	1.4 BX-0340-0	0.0	---	P4	E	---	2GK5	2.5 ET-2507-6	1.2	---	P4	C	6500
1U5	1.4 BX-6230-0	0.0	---	P1	D	---	2GU5	2.5 ET-1562-0	0.4	---	P4	C	8500
1V2	0.6 EV-0900-0	0.0	0	P5	E	---	2GW5	2.5 ET-2105-0	1.2	---	P4	B	9400
1W5	1.1 EV-2780-0	0.5	---	P4	D	---	2HA5	2.0 ET-1507-6	1.2	---	P4	C	8000
1X2	1.1 BS-0000-0	0.0	12	P5	G	---	2HK5	2.5 ET-1502-0	1.0	---	P4	C	7500
							2HM5	2.5 ET-1507-6	1.2	---	P4	C	8000
							2HQ5	2.5 ET-1507-6	1.4	---	P4	C	4500
							2T4	2.5 ET-2105-0	1.4	---	P4	C	4400 Plate Volts=Low
							3A2	3.0 BS-0000-0	0.0	30	P5	G	Cap=P
							3A3	3.0 HS-0000-0	0.0	0	P5	G	Cap=P
							3AF4A	3.0 ET-2105-0	1.4	---	P4	C	4200 Plate Volts=Low

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS
{3AL5	3.0	ET-0701-6	0.0	0	P1	G	Diode No. 1	3DH3	3.0	DY-0000-0	0.0	35	P5	G	Cap=P
{3AL5	3.0	ET-0205-6	0.0	0	P1	G	Diode No. 2	3DJ3	3.0	HS-0000-0	0.0	35	P5	G	Cap=P
3AT2†	3.0	B3-0000-0	0.0	17	P5	G	Cap=P	3DK6	3.0	ET-1562-7	1.0	—	P4	C	4400
3AU6	3.0	ET-1567-2	1.0	—	P4	C	Triode Sect.	3DR3	3.0	DS-0000-0	0.0	35	P5	G	Cap=P
{3AV6	3.0	ET-1702-5	1.3	—	P4	C	Diode No. 1	3DS3	3.0	DS-0000-0	0.0	35	P5	G	Cap=P
{3AV6	3.0	ET-1602-5	0.0	—	P1	D	Diode No. 2	{3DT6	3.0	ET-1562-7	3.4	—	P4	E	Grid No. 1
{3AV6	3.0	ET-1502-7	0.0	—	P1	D	Diode No. 2	{3DT6	3.0	ET-7562-1	1.8	—	—	E	Grid No. 3. Hold down P1 and Press P4
3AW2†	3.0	C3-0000-0	0.0	20	P5	G	Cap=P	3DX4	3.0	ET-2105-0	3.6	—	P4	C	Plate Volts—Low
3AW3	3.0	HS-0000-0	0.0	0	P5	G	Cap=P	3DZ4	3.0	ET-2105-0	0.8	—	P4	C	
3B2	3.0	HS-0000-0	0.0	—	P5	E	Cap=P	3EA5	3.0	ET-1562-0	1.2	—	P4	C	
3B4	2.5	EV-3710-0	15.0	—	P4	E	Cap=P	3EH7	3.0	EV-2781-9	2.8	—	P4	C	
3BA6	3.0	ET-1567-2	1.0	—	P4	D	Cap=P	3EJ7	3.0	EV-2781-9	1.2	—	P4	C	
3BC5	3.0	ET-1562-0	0.6	—	P4	C	Cap=P	3ER5	3.0	ET-2567-0	0.8	—	P4	C	
{3BE6	3.0	ET-7562-1	0.0	—	—	D	Ampl. Sect. Hold down P1 and Press P4	3EV5	3.0	ET-1562-0	1.2	—	P4	C	
{3BE6	3.0	ET-1602-7	2.0	—	P4	C	Osc. Sect.	3FH5	3.0	ET-2507-0	1.0	—	P4	C	
3BL2†	3.0	B3-0000-0	0.0	12	P5	G	Cap=P	3FS5	3.0	ET-1567-0	0.2	—	P4	C	
3BM2†	3.0	B3-0000-0	0.0	12	P5	G	Cap=P	3GK5	3.0	ET-2507-6	1.2	—	P4	C	
3BN2†	3.0	B3-0000-0	0.0	—	P5	E	Cap=P	3GW5	3.0	ET-2105-0	1.2	—	P4	B	
3BN4	3.0	ET-2501-0	1.9	—	P4	C	Note 3	3HA5	2.5	ET-1507-6	1.2	—	P4	C	
3BN4A	3.0	ET-2501-0	2.4	—	P4	C		3HK5	3.0	ET-1502-0	1.0	—	P4	E	
{3BN6	3.0	ET-2751-6	0.0	—	P4	E	Limiter Grid	3HM5	3.0	ET-1507-6	1.2	—	P4	C	
{3BN6	3.0	ET-6751-2	0.4	—	P4	D	Plate Volts—Low	3HQ5	3.0	ET-1507-6	1.4	—	P4	C	
3BS2A†	3.0	B3-0000-0	0.0	12	P5	G	Cap=P	3JC6	3.0	EV-2781-9	0.8	—	P4	C	
3BT2†	3.0	C3-0000-0	0.0	20	P5	G	Cap=P	3JD6	3.0	EV-2781-9	1.0	—	P4	C	
{3BU8	3.0	EV-7821-9	0.0	—	—	D	Pent. No. 1. Hold down P1 and Press P4	3JH6	3.0	ET-1562-7	1.2	—	P4	C	
{3BU8	3.0	EV-7321-6	0.0	—	—	D	Pent. No. 2. Hold down P1 and Press P4	{3KF8	3.0	EV-7321-6	1.0	—	P4	E	Pent. No. 1
3BW2†	3.0	B3-0000-0	0.0	35	P5	G	Cap=P	{3KF8	3.0	EV-7321-6	1.0	—	P4	E	Pent. No. 2
3BX6	3.0	EV-2781-9	0.5	—	P4	C		3KT6	3.0	EV-2781-9	1.0	—	P4	C	
{3BY6	3.0	ET-1562-7	1.0	—	P4	D	Grid No. 1	3V4	3.0	HR-6230-0	6.0	—	P4	E	1260
{3BY6	3.0	ET-7562-1	3.2	—	—	D	Grid No. 3. Hold down P1 and Press P4	4AU6	4.3	ET-1567-2	1.0	—	P4	C	2500
3BZ6	3.0	ET-1562-7	1.2	—	P4	C	Plate Volts—Low	{4AV6	4.3	ET-1702-5	1.3	—	P4	E	Triode Sect.
3C4	2.5	BX-6230-0	4.0	—	P4	E	Cap=P	{4AV6	4.3	ET-1602-5	0.0	—	P1	D	Diode No. 1
3CA3	3.0	HS-0000-0	0.0	13	P5	G	Cap=P	{4AV6	4.3	ET-1502-7	0.0	—	P1	D	Diode No. 2
3CB6	3.0	ET-1562-7	1.0	—	P4	C		4BC5	4.3	ET-1562-0	0.6	—	P4	C	3100
3CE5	3.0	ET-1562-0	1.0	—	P4	C		{4BC8	4.3	EV-7608-9	2.4	—	P4	C	Triode No. 1
3CN3A	3.0	HS-0000-0	0.0	20	P5	G	Cap=P	{4BC8	4.3	EV-2103-9	2.4	—	P4	C	Triode No. 2
{3CS6	3.0	ET-1562-7	0.0	—	P4	D	Cap=P	{4BN6	4.3	ET-2751-6	0.0	—	P4	E	Limiter Grid. Plate volts—low
{3CS6	3.0	ET-7562-1	0.0	—	P4	D	Grid No. 1	{4BN6	4.3	ET-6751-2	0.4	—	P4	D	Quadrature Grid. Plate volts—low
3CU3	3.0	HS-0000-0	0.0	12	P5	G	Cap=P	{4BQ7A	4.3	EV-7608-9	2.0	—	P4	C	Triode No. 1
3CV3A	3.0	HS-0000-0	0.0	17	P5	G	Cap=P	{4BQ7A	4.3	EV-2103-9	2.0	—	P4	C	Triode No. 2
3CX3	3.0	DY-0000-0	0.0	20	P5	G	Cap=P	{4BS8	4.3	EV-7608-9	0.0	—	P4	C	Triode No. 1
3CY3	3.0	HS-0000-0	0.0	20	P5	G	Cap=P	{4BS8	4.3	EV-2103-9	0.0	—	P4	C	Triode No. 2
3CY3	3.0	ET-1562-0	0.0	20	P5	G	Cap=P	{4BU8	4.3	EV-7821-9	0.0	—	—	D	Pent. No. 1. Hold down P1 and Press P4
3CZ3	3.0	HS-0000-0	0.0	12	P5	G	Cap=P	{4BU8	4.3	EV-7321-6	0.0	—	—	D	Pent. No. 2. Hold down P1 and Press P4
3DA3	3.0	DY-0000-0	0.0	20	P5	G	Cap=P	4BZ6	4.3	ET-1562-7	1.2	—	P4	C	3850
3DB3	3.0	HS-0000-0	0.0	0	P5	G	Cap=P	{4BZ7	4.3	EV-7608-9	2.2	—	P4	C	Triode No. 1
3DC3	3.0	HS-0000-0	0.0	12	P5	G	Cap=P	{4BZ7	4.3	EV-2103-9	2.2	—	P4	C	Triode No. 2
3DF3	3.0	DY-0000-0	0.0	20	P5	G	Cap=P	4CB6	4.3	ET-1562-7	1.0	—	P4	C	3900
{3DG4	3.0	DR-0700-0	0.0	90	P3	G	Plate No. 1	{4CS6	4.3	ET-1562-7	0.0	—	P4	D	Grid No. 1
{3DG4	3.0	DR-0500-0	0.0	90	P3	G	Plate No. 2	{4CS6	4.3	ET-7562-1	0.0	—	P4	D	Grid No. 2

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS
4CY5	4.3	ET-1562-0	1.0	---	P4	C	2800	Plate Volts-Low	5AQ5	5.0	ET-1562-0	2.1	---	P4	D 2600
4DE6	4.3	ET-1562-7	1.0	---	P4	C	3900		{5AR4	5.0	JS-0600-0	0.0	88	P3	G ★
4DK6	4.3	ET-1562-7	1.0	---	P4	C	4400		{5AR4	5.0	JS-0400-0	0.0	88	P3	G ★
{4DT6	4.3	ET-1562-7	3.4	---	P4	E	380	Grid No. 1	{5AS8	5.0	EV-2913-7	1.0	---	P4	C 3900
{4DT6	4.3	ET-1562-1	1.8	---	---	E	315	Grid No. 2. Hold down P1 and press P4	{5AS8	5.0	EV-0608-7	0.0	0	P1	G ★
4EH7	4.3	EV-2781-9	2.8	---	---	C	3200		{5AT8	5.0	EV-9673-8	1.2	---	P4	C 2900
4EJ7	4.3	EV-2781-9	1.2	---	P4	C	4900		{5AT8	5.0	EV-1203-8	0.0	---	P4	C 3650
{4ES8	4.3	EV-7608-0	2.4	---	P4	C	7500	Triode No. 1	{5AU4	6.3	JS-0600-0	0.0	88	P3	G ★
{4ES8	4.3	EV-2103-0	2.4	---	P4	C	7500	Triode No. 2	{5AU4	6.3	JS-0400-0	0.0	87	P3	G ★
4EW6	4.3	ET-1562-7	0.6	---	P4	C	6500		{5AV8	5.0	EV-6987-3	0.8	---	P4	C 3900
4GK5	4.3	ET-2507-6	1.2	---	P4	C	6500		{5AV8	5.0	EV-2301-9	4.6	---	P4	D 2100
4GM6	4.3	ET-1562-7	1.0	---	P4	C	6000		{5B8	5.0	EV-6987-1	1.0	---	P4	C 3900
{4GS8	4.3	EV-7821-9	0.0	---	---	D	630	Pent. No. 1. Hold down P1 and Press P4	{5B8	5.0	EV-2301-9	4.4	---	P4	D 2100
{4GS8	4.3	EV-7321-6	0.0	---	---	D	630	Pent. No. 2. Hold down P1 and Press P4	{5BC3†	5.0	BT-0900-0	0.0	85	P3	G ★
{4GX7	4.3	EV-2671-0	1.0	---	P4	C	4400	Pent. Sect.	{5BC3†	5.0	BT-0500-0	0.0	83	P3	G ★
{4GX7	4.3	EV-9801-0	1.4	---	P4	C	5300	Triode Sect.	{Model 539C: No Adapter Required.						
4GZ5	4.3	ET-2761-0	2.7	---	P4	D	3300		{5BE8	5.0	EV-9678-3	0.8	---	P4	D 2400
4HA5	4.3	ET-1507-6	1.2	---	P4	C	8000		{5BE8	5.0	EV-1203-0	1.0	---	P4	C 5350
{4HA7†	4.3	B3-9W04-0	2.2	---	P4	C	2000	Triode No. 1	{5BK7A	5.0	EV-7608-9	1.2	---	P4	C 5350
{4HA7†	4.3	B3-X203-0	2.0	---	P4	E	360	Triode No. 2	{5BK7A	5.0	EV-2103-9	1.2	---	P4	C 5350
{4HC7†	4.3	B3-9W04-0	0.6	---	P4	C	2850	Triode No. 1	{5BQ7A	5.0	EV-7608-9	2.0	---	P4	C 4000
{4HC7†	4.3	B3-X203-0	2.4	---	P4	E	400	Triode No. 2	{5BQ7A	5.0	EV-2103-9	2.0	---	P4	C 4000
4HK5	4.3	ET-1502-0	1.1	---	P4	C	8000		{5BR8	5.0	EV-9678-0	0.8	---	P4	D 2400
4HM5	4.3	ET-1507-6	1.2	---	P4	C	8000		{5BR8	5.0	EV-1203-0	1.0	---	P4	C 5350
4HM6	4.3	EV-2781-9	0.8	---	P4	C	6700		{5BT8	5.0	EV-8679-0	1.0	---	P4	C 3900
4HQ5	4.3	ET-1507-6	1.4	---	P4	C	4500		{5BT8	5.0	EV-0103-0	0.0	---	P1	E ★
{4HS8	4.3	EV-7821-9	1.0	---	P4	D	500	Pent. No. 1	{5BT8	5.0	EV-0203-0	0.0	---	P1	E ★
{4HS8	4.3	EV-7321-6	1.0	---	P4	D	500	Pent. No. 2	{5BW8	5.0	EV-6987-0	0.8	---	P4	D 2400
4HT6	4.3	EV-2781-9	0.8	---	P4	C	5300		{5BW8	5.0	EV-0102-0	0.0	0	P1	G ★
4JC6	4.3	EV-2781-9	0.8	---	P4	C	7400		{5CG8	5.0	EV-9678-0	1.2	---	P4	C 2900
4JD6	4.3	EV-2783-9	0.5	---	---	C	4700	Hold down P1 and press P4	{5CG8	5.0	EV-1203-0	2.0	---	P4	C 3650
4JH6	4.3	ET-1562-7	1.2	---	P4	B	3500		{5CL8	5.0	EV-9678-0	1.0	---	P4	D 2500
4JK6	4.3	ET-1562-7	0.4	---	P4	C	6600		{5CL8	5.0	EV-1203-0	0.7	---	P4	C 5000
4JL6	4.3	ET-1562-7	12.0	---	P4	C	4350		{5CM8	5.0	EV-2673-0	1.0	---	P4	C 3900
{4JW8	4.3	EV-2637-0	1.6	---	P4	D	2400	Pent. S3ct.	{5CM8	5.0	EV-9108-0	1.1	---	P4	D 1260
{4JW8	4.3	EV-9108-0	1.1	---	P4	D	2200	Triode Sect.	{5CQ8	5.0	EV-2637-0	0.6	---	P4	D 2800
{4KE8	4.3	EV-2637-0	0.6	---	P4	C	5100	Pent. Sect.	{5CQ8	5.0	EV-9108-0	1.1	---	P4	D 4400
{4KE8	4.3	EV-9108-0	1.4	---	P4	C	4600	Triode Sect.	{5CZ5	5.0	EV-3917-0	1.0	---	P4	C 3000
{4KF8	4.3	EV-7821-9	1.0	---	P4	E	350	Pent. No. 1	{5DH8	5.0	EV-9678-0	0.8	---	P4	C 4400
{4KF8	4.3	EV-7321-6	1.0	---	P4	E	350	Pent. No. 2	{5DJ4	5.0	JS-0600-0	0.0	87	P3	G ★
4KT6	4.3	EV-2781-9	1.0	---	P4	C	7500		{5DJ4	5.0	JS-0400-0	0.0	84	P3	G ★
{4LJ8	4.3	EV-9678-0	0.6	---	P4	C	5600	Pent. Sect.	{5EA8	5.0	EV-2637-0	0.8	---	P4	D 3100
{4LJ8	4.3	EV-1203-0	1.8	---	P4	C	4700	Triode Sect.	{5EA8	5.0	EV-9108-0	1.4	---	P4	C 5250
4LU6	4.3	ET-1562-7	1.0	---	P4	C	4400		{5ES8	5.0	EV-7608-0	2.4	---	P4	C 7500
{4MK8	4.3	EV-7821-9	0.0	---	---	D	630	Pent. No. 1	{5ES8	5.0	EV-2103-0	2.4	---	P4	C 7500
{4MK8	4.3	EV-7321-6	0.0	---	---	D	630	Pent. No. 2	{5EU8	5.0	EV-7198-0	0.8	---	P4	D 3100
{4MK8	5.0	EV-2631-9	0.4	---	P4	C	3650	Pent. Sect.	{5EU8	5.0	EV-2306-0	1.4	---	P4	C 5250
{5AM8	5.0	EV-0807-0	0.0	0	P1	G	★	Diode Sect.	{5EW6	5.0	ET-1562-7	0.6	---	P4	C 6500
{5AN8	5.0	EV-8679-1	0.8	---	P4	C	3900	Pent. Sect.							
{5AN8	5.0	EV-2173-6	4.6	---	P4	D	2100	Triode Sect.							

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS
{5FG7	5.0	EV-9678-0	1.0	---	P4	D	Pent. Sect.	{5V3	5.0	JS-0600-4	0.0	87	P3	G	Plate No. 1
{5FG7	5.0	EV-1203-0	1.4	---	P4	C	Triode Sect.	{5V3	5.0	JS-0400-6	0.0	86	P3	G	Plate No. 2
{5FV8	5.0	EV-9678-0	1.0	---	P4	D	Pent. Sect.	{5V4	5.0	JS-0600-0	0.0	89	P3	G	Plate No. 1
{5FV8	5.0	EV-1203-0	1.6	---	P4	D	Triode Sect.	{5V4	5.0	JS-0400-0	0.0	89	P3	G	Plate No. 2
{5GH8	5.0	EV-2637-0	1.7	---	P4	D	Pent. Sect.	5V6	5.0	HS-5348-0	3.3	---	P4	D	2600
{5GH8	5.0	EV-9108-0	1.3	---	P4	D	Triode Sect.	{5V9†	5.0	FW-3741-2	1.0	---	---	E	Hent. Sect. Hold Down P1 and Press P4. Use Adapter SA-11, 1050-177. Note 7.
5GM6	5.0	ET-1562-7	1.0	---	P4	C	6000	{5V9†	5.0	FW-8W09-0	2.4	---	P4	C	3150
{5GS7	5.0	EV-9678-0	0.4	---	P4	C	Pent. Sect.	{5V9	5.0	EV-7986-1	1.2	---	P4	C	2900
{5GS7	5.0	EV-1203-0	5.0	---	P4	C	Triode Sect.	{5X8	5.0	EV-2306-1	2.0	---	P4	C	3650
5GX6	5.0	ET-1562-7	1.5	---	P4	E	900	{5X8	5.0	FW-3782-4	1.5	---	P4	C	4700
{5GX7	5.0	EV-2671-0	1.0	---	P4	C	Pent. Sect.	{5X9†	6.3	FW-W901-0	1.2	---	P4	C	3000
{5GX7	5.0	EV-9801-0	1.4	---	P4	C	Triode Sect.	{5X9	5.0	JS-0600-0	0.0	80	P3	G	Plate No. 1
{5HA7†	5.0	B3-9W04-0	2.2	---	P4	D	Triode No. 1	{5Y3	5.0	JS-0400-0	0.0	75	P3	G	Plate No. 2
{5HA7	5.0	B3-X203-0	2.0	---	P4	E	360	{5Y3	5.0	ET-6107-0	1.6	---	P4	D	2500
{5HB7	5.0	EV-2671-0	1.4	---	P4	D	Pent. Sect.	6AB4	6.3	FW-978W-0	1.5	---	P4	C	4400
{5HB7	5.0	EV-9801-0	1.0	---	P4	B	6000	{6AB9†	6.3	FW-3124-0	1.5	---	P4	C	4400
{5HC7†	5.0	B3-9W04-0	0.6	---	P4	C	Triode No. 1	{6AB9	6.3	HS-4865-3	1.0	---	P4	C	5650
{5HC7	5.0	B3-X203-0	2.4	---	P4	E	400	6AC7	6.3	B3-9XW8-7	1.0	---	P4	C	4400
{5HG8	5.0	EV-2893-0	0.6	---	P4	C	Pent. Sect.	{6AC9†	6.3	B3-0304-0	0.0	18	P1	G	Diode No. 1
{5HG8	5.0	EV-6703-0	5.4	---	P4	D	Triode Sect.	{6AC9	6.3	B3-0203-0	0.0	18	P1	G	Diode No. 2
5HZ6	5.0	ET-1562-7	1.1	---	P4	D	1250	{6AC10†	6.3	B3-9W04-0	1.0	---	P4	C	3450
{5J6	5.0	ET-5207-0	1.8	---	P4	C	Triode No. 1	{6AC10	6.3	B3-7506-0	1.0	---	P4	C	3450
{5J6	5.0	ET-6107-0	1.8	---	P4	C	Triode No. 2	{6AC10	6.3	B3-X203-0	1.0	---	P4	C	3450
5JK6	5.0	ET-1562-7	0.4	---	P4	B	6600	{6AD7	6.3	HS-5348-6	5.3	---	P4	E	1260
5JL6	5.0	ET-1562-7	12.0	---	P4	C	4350	{6AD7	6.3	HS-1608-3	0.0	---	P4	E	380
{5JW8	5.0	EV-2637-0	1.6	---	P4	D	Pent. Sect.	{6AD10†	6.3	B3-3762-5	1.8	---	P4	D	1200
{5JW8	5.0	EV-9108-0	1.1	---	P4	D	Triode Sect.	{6AD10	6.3	B3-8XW9-0	0.6	---	P4	C	3900
{5KD8	5.0	EV-2637-0	0.4	---	P4	D	Pent. Sect.	6AF3	6.3	EV-0002-0	0.0	89	P3	G	Plate No. 2
{5KE8	5.0	EV-9108-0	0.6	---	P4	C	Pent. Sect.	6AF4	6.3	ET-2105-0	1.4	---	P4	C	4200
{5KE8	5.0	EV-9108-0	1.4	---	P4	C	Triode Sect.	{6AF9†	6.3	FW-8W97-0	2.2	---	P4	C	6300
{5KZ8	5.0	EV-2673-0	1.4	---	P4	D	Pent. Sect.	{6AF9	6.3	FW-1432-0	1.0	---	P4	C	5300
{5KZ8	5.0	EV-9108-0	1.8	---	P4	C	Triode Sect.	{6AF11†	6.3	B3-X2W9-0	1.6	---	P4	C	4500
{5LJ8	5.0	EV-9678-0	0.6	---	P4	C	Pent. Sect.	{6AF11	6.3	B3-6805-0	1.1	---	P4	C	2800
{5LJ8	5.0	EV-1203-0	1.8	---	P4	C	Pent. Sect.	{6AF11	6.3	B3-3407-0	0.7	---	P4	C	1700
{5MB8	5.0	EV-9678-0	0.6	---	P4	C	Pent. Sect.	6AG5	6.3	ET-1562-0	1.7	---	P4	D	2500
{5MB8	5.0	EV-1203-0	0.8	---	P4	C	Triode Sect.	6AG7	6.3	HS-4865-1	1.7	---	P4	C	5000
{5MQ8	5.0	EV-2637-0	1.0	---	P4	C	Pent. Sect.	{6AG9†	6.3	B3-X2W9-4	2.0	---	P4	C	6300
{5MQ8	5.0	EV-9108-0	1.0	---	P4	C	Triode Sect.	{6AG9	6.3	B3-5706-0	2.0	---	P4	D	2900
5R4	5.0	JS-0600-0	0.0	83	P3	G	Plate No. 1	{6AG11†	6.3	B3-8709-0	1.0	---	P4	C	4900
5R4	5.0	JS-0400-0	0.0	80	P3	G	Plate No. 2	{6AG11	6.3	B3-5604-0	1.0	---	P4	C	4900
5T8	5.0	EV-8907-6	1.3	---	P4	E	750	{6AG11	6.3	B3-0W0X-0	0.0	0	P1	G	Diode No. 1
5T8	5.0	EV-0607-1	0.0	0	P1	G	Triode Sect.	{6AG11	6.3	B3-0302-0	0.0	0	P1	G	Diode No. 2
5T8	5.0	EV-0203-7	0.0	0	P1	G	Diode No. 1	{6AH9†	6.3	B3-5X87-9	1.2	---	P4	C	7500
5T8	5.0	EV-0107-8	0.0	0	P1	G	Diode No. 2	{6AH9	6.3	B3-2304-0	4.3	---	P4	E	1550
{5U4	5.0	JS-0600-0	0.0	87	P3	G	Plate No. 1	6AK5	6.3	ET-1562-0	1.8	---	P4	C	3150
{5U4	5.0	JS-0400-0	0.0	84	P3	G	Plate No. 2	6AK6	6.3	ET-1567-2	3.0	---	P4	C	1320
{5U8	5.0	EV-2637-0	0.8	---	P4	D	Pent. Sect.	{6AK9†	6.3	B3-8597-0	7.5	---	P4	C	4400
{5U8	5.0	EV-9108-0	1.0	---	P4	C	Triode Sect.	{6AK9	6.3	B3-WX07-0	1.8	---	P4	E	1650
5U9†	6.3	FW-3782-4	1.5	---	P4	C	Pent. Sect. Use Adapter SA-11, 1050-177. Note 7.	{6AK9	6.3	B3-3207-0	3.2	---	P4	E	1300
{5U9	6.3	FW-W901-0	4.5	---	P4	C	Triode Sect.								

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	
{6AK10†	6.3	B3-9W04-0	2.0	---	P4	D	2900 Triode No. 1	{6AY11†	6.3	B3-8709-0	1.3	---	P4	D	1100 Triode No. 1	
{6AK10	6.3	B3-7506-0	2.0	---	P4	D	2900 Triode No. 2	{6AY11	6.3	B3-5604-0	1.3	---	P4	D	1100 Triode No. 2	
{6AK10	6.3	B3-X203-0	2.0	---	P4	D	2900 Triode No. 3	{6AY11	6.3	B3-0W0X-0	0.0	0	P1	G	★ Diode No. 1	
{6AL3	6.3	EV-0009-0	0.0	89	P3	G	Reverse Meter, CAP=P	{6AY11	6.3	B3-0302-0	0.0	0	P1	G	★ Diode No. 2	
{6AL5	6.3	ET-0701-6	0.0	0	P1	G	Diode No. 1	{6AZ8	6.3	EV-6123-0	1.0	---	P4	C	3800 Pent. Sect. Discharge Neon Flash in Start Trading	
{6AL5	6.3	ET-0205-6	0.0	0	P1	G	Diode No. 2	{6AZ8	6.3	EV-9807-0	4.4	---	P4	D	2100 Triode Sect.	
{6AL9†	6.3	B3-X2W9-4	0.5	---	P4	B	Pent. Sect.	{6B10†	6.3	B3-5607-0	3.0	---	P4	D	1600 Triode No. 1	
{6AL9	6.3	B3-5706-0	1.4	---	P4	C	4000 Triode Sect.	{6B10	6.3	B3-3402-0	3.0	---	P4	D	1600 Triode No. 2	
{6AL11†	6.3	B3-8XW9-0	2.4	---	P4	C	Pent. No. 1	{6B10	6.3	B3-0W09-0	0.0	0	P1	G	★ Diode No. 1	
{6AL11	6.3	B3-3672-4	3.4	---	P4	E	Pent. No. 2	{6B10	6.3	B3-0809-0	0.0	0	P1	G	★ Diode No. 2	
{6AM8	6.3	EV-2631-9	0.4	---	P4	C	Pent. Sect.	{6BA3	6.3	EV-0209-0	0.0	86	P3	G	★ Use Adapter SA-4, 1050-144, Note 7	
{6AM8	6.3	EV-0807-0	0.0	0	P1	C	Diode Sect.	{Model 539C: No Adapter Required.								
{6AN4	6.3	ET-2105-0	0.7	---	P4	C	5550	{6BA5	6.3	DW-1578-0	3.0	---	P4	D	1350	
{6AN5	6.3	ET-1567-0	0.5	---	---	C	5000 Hold Down P1 and Press P4	{6BA6	6.3	ET-1567-2	1.0	---	P4	D	2070	
{6AN8	6.3	EV-8679-1	0.8	---	---	C	3900 Pent. Sect.	{6BA7	6.3	EV-7913-2	0.0	---	---	D	1070	
{6AN8	6.3	EV-2173-6	4.6	---	P4	D	2100 Triode Sect.	{6BA7	6.3	EV-2103-7	0.0	---	P4	C	5000 Osc. Sect.	
{6AQ5	6.3	ET-1562-0	2.1	---	P4	D	2600	{6BA8	6.3	EV-7986-0	1.5	---	P4	C	4400 Pent. Sect.	
{6AR11†	6.3	B3-W89X-7	0.6	---	P4	C	Pent. No. 1	{6BA8	6.3	EV-2301-0	5.6	---	P4	D	1700 Triode Sect.	
{6AR11	6.3	B3-5236-4	0.6	---	P4	C	Pent. No. 2	{6BA11†	6.3	B3-4638-7	1.0	---	P4	D	500 Pent. No. 1	
{6AS6	6.3	ET-1562-7	1.8	---	P4	D	1400	{6BA11	6.3	B3-4238-5	1.0	---	P4	D	500 Pent. No. 2	
{6AS7	6.3	HY-0506-4	0.0	83	P3	G	Triode No. 1 Emission Test, Make No Gas Test	{6BA11	6.3	B3-9X0W-0	4.8	---	P4	D	1250 Triode Sect.	
{6AS7	6.3	HY-0203-1	0.0	83	P3	G	Triode No. 2 Emission Test, Make No Gas Test	{6BC4	6.3	EV-2106-0	1.8	---	P4	C	6300	
{6AS8	6.3	EV-2913-7	1.0	---	P4	C	Pent. Sect.	{6BC5	6.3	ET-1562-0	0.6	---	P4	C	3100	
{6AS8	6.3	EV-0608-7	0.0	0	P1	G	Diode Sect.	{6BC7	6.3	EV-0809-0	0.0	0	P1	G	★ Diode No. 1	
{6AS11†	6.3	B3-X2W9-0	1.8	---	P4	C	Pent. Sect.	{6BC7	6.3	EV-0607-0	0.0	0	P1	G	★ Diode No. 2	
{6AS11	6.3	B3-6805-0	0.6	---	P4	D	2700 Triode No. 1	{6BC7	6.3	EV-0201-0	0.0	0	P1	G	★ Diode No. 3	
{6AS11	6.3	B3-3407-0	1.4	---	P4	D	2700 Triode No. 2	{6BC8	6.3	EV-7608-9	2.4	---	P4	C	3900 Triode No. 1	
{6AT6	6.3	ET-1702-0	1.5	---	P4	E	820 Triode Sect.	{6BC8	6.3	EV-2103-9	2.4	---	P4	C	3900 Triode No. 2	
{6AT6	6.3	ET-1602-0	0.0	---	P1	D	Diode No. 1	{6BD11†	6.3	B3-X2W9-0	1.8	---	P4	C	4000 Pent. Sect.	
{6AT6	6.3	ET-1502-0	0.0	---	P1	D	Diode No. 2	{6BD11	6.3	B3-6805-0	1.0	---	P4	C	3500 Triode No. 1	
{6AT8	6.3	EV-9673-8	1.2	---	P4	C	Pent. Sect.	{6BD11	6.3	B3-3407-0	0.8	---	P4	D	3000 Triode No. 2	
{6AT8	6.3	EV-1203-8	2.0	---	P4	C	3650 Triode Sect.	{6BE3†	6.3	B3-0W07-0	0.0	91	P3	G	★	
{6AU4	6.3	HY-0503-0	0.0	91	P3	G	Hold Down P1 and Press P4	{6BE6	6.3	ET-7562-1	0.0	---	---	D	940	
{6AU5	6.3	HS-1533-0	4.0	---	---	C	3500	{6BE6	6.3	ET-1602-7	2.0	---	P4	C	4500 Osc. Sect.	
{6AU6	6.3	ET-1567-2	1.0	---	P4	C	2500	{6BE7	6.3	EV-7163-9	6.0	---	P4	E	630	
{6AU8	6.3	EV-7936-0	1.0	---	P4	C	4400 Pent. Sect.	{6BE8	6.3	EV-9678-3	0.8	---	P4	D	2400 Pent. Sect.	
{6AU8	6.3	EV-2301-0	1.5	---	P4	C	3100 Triode Sect.	{6BE8	6.3	EV-1203-0	1.0	---	P4	C	5350 Triode Sect.	
{6AV6	6.3	ET-1702-5	1.3	---	P4	E	800 Triode Sect.	{6BF11†	6.3	B3-8XW9-0	6.0	---	P4	C	4700 Pent. No. 1	
{6AV6	6.3	ET-1602-5	0.0	---	P1	D	Diode No. 1	{6BF11	6.3	B3-3752-5	1.8	---	P4	E	400 Pent. No. 2	
{6AV6	6.3	ET-1502-7	0.0	---	P1	D	Diode No. 2	{6BH3†	6.3	EV-0209-0	0.0	87	P3	G	★ Use Adapter SA-4, 1050-144, Note 7	
{6AV11†	6.3	B3-9W04-0	3.0	---	P4	D	1600 Triode No. 1	{Model 539C: No Adapter Required.								
{6AV11	6.3	B3-7506-0	3.0	---	P4	E	1600 Triode No. 2	{6BH6	6.3	ET-1562-7	0.8	---	P4	C	2150	
{6AV11	6.3	B3-X203-0	3.0	---	P4	E	1600 Triode No. 3	{6BH8	6.3	EV-7986-0	0.5	---	---	C	C	3150 Pent. Sect. Hold down P1 and Press P4
{6AW8	6.3	EV-7986-3	2.0	---	P4	C	Pent. Sect.	{6BH8	6.3	EV-2301-0	4.8	---	---	P4	D	2100 Triode Sect.
{6AW8	6.3	EV-2301-9	1.3	---	P4	C	4700 Triode Sect.	{6BH11†	6.3	B3-8W9X-0	0.6	---	P4	C	3800 Pent. Sect.	
{6AX3†	6.3	B3-0407-0	0.0	89	P3	G	★	{6BH11	6.3	B3-6705-0	1.0	---	P4	C	5700 Triode No. 1	
{6AX4	6.3	HY-0503-0	0.0	89	P3	G	★	{6BH11	6.3	B3-4302-0	1.0	---	P4	C	5700 Triode No. 2	
{6AX5	6.3	HS-0508-3	0.0	87	P3	G	★	{6BJ3†	6.3	B3-0W07-0	0.0	90	P3	G	★	
{6AX5	6.3	HS-0308-5	0.0	87	P3	G	★	{6BJ7	6.3	EV-0809-3	0.0	0	P1	G	★ Diode No. 1	
{6AY3†	6.3	EV-0209-0	0.0	87	P3	G	★	{6BJ7	6.3	EV-0607-3	0.0	0	P1	G	★ Diode No. 2	
{Model 539C: No Adapter Required.								{6BJ7	6.3	EV-0201-3	0.0	0	P1	G	★ Diode No. 3	

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS
{6BJ8	6.3	EV-8709-0	4.5	---	P4	D	Triode Sect.	6BZ6	6.3	ET-1562-7	1.2	---	P4	C	3850
{6BJ8	6.3	EV-0603-0	0.0	0	P1	G	Diode No. 1	{6BZ7	6.3	EV-7608-9	2.2	---	P4	C	4300
{6BK4	6.3	EV-0102-0	0.0	0	P1	G	Diode No. 2	{6BZ7	6.3	EV-2103-9	2.2	---	P4	C	4300
{6BK7	6.3	HS-0501-0	0.0	---	P1	E	Cap = G	6C4	6.3	ET-6107-0	4.8	---	P4	E	1380
{6BK7	6.3	EV-7608-9	1.2	---	P4	C	Triode No. 1	{6C9†	6.3	EV-7986-0	2.6	---	P4	D	2900
{6BK7	6.3	EV-2103-9	1.2	---	P4	C	Triode No. 2	{6C10†	6.3	EV-132W-0	2.6	---	P4	D	2900
{6BK11†	6.3	B3-9W04-0	2.6	---	P4	E	Triode No. 1	{6C10†	6.3	B3-9W04-0	1.3	---	P4	D	875
{6BK11	6.3	B3-7506-0	2.2	---	P4	E	Triode No. 2	{6C10	6.3	B3-7506-0	1.3	---	P4	D	875
{6BK11	6.3	B3-X203-0	2.2	---	P4	E	Triode No. 3	{6C10	6.3	B3-X203-0	1.3	---	P4	D	875
{6BL7	6.3	HY-4506-0	3.5	---	P4	C	Triode No. 1	{6CA4	6.3	EV-0703-0	0.0	87	P3	G	★
{6BL7	6.3	HY-1203-0	3.5	---	P4	C	Triode No. 2	{6CA4	6.3	EV-0103-0	0.0	87	P3	G	★
{6BL8	6.3	EV-2637-1	1.2	---	P4	C	Pent. Sect.	6CA5	6.3	DU-2761-0	0.0	---	---	C	5300
{6BL8	6.3	EV-9108-6	4.8	---	P4	C	Triode Sect.	6CA7	6.3	HS-5348-1	5.5	---	P4	C	3800
{6BM8	6.3	EV-3672-0	7.4	---	P4	D	Pent. Sect.	{6CA11†	6.3	B3-8XW9-7	2.5	---	P4	C	5800
{6BM8	6.3	EV-1908-0	0.6	---	P4	E	Triode Sect.	{6CA11	6.3	B3-6405-0	2.0	---	P4	D	2000
6BN4	6.3	ET-2501-0	1.9	---	P4	C		{6CA11	6.3	B3-3207-0	2.0	---	P4	D	2500
6BN4A	6.3	ET-2501-0	2.4	---	P4	C		6CB5	6.3	HS-4013-0	12.0	---	P4	C	4100
{6BN6	6.3	ET-2751-6	0.0	---	P4	E	Lighter Grid Pent. Vols - Low Quadrature Grid Pent. Vols - Low	6CB6	6.3	ET-1562-7	1.0	---	P4	C	3900
{6BN6	6.3	ET-6751-2	0.4	---	P4	D		6CD3†	6.3	B3-0W07-0	0.0	90	P3	G	★
{6BN8	6.3	EV-8709-0	1.8	---	P4	D	Triode Sect.	6CD6	6.3	HS-5083-0	18.0	---	P3	G	★
{6BN8	6.3	EV-0603-0	0.0	0	P1	D	Diode No. 1	6CE3†	6.3	B3-0407-0	0.0	91	P3	G	★
{6BN8	6.3	EV-0102-0	0.0	0	P1	G	Diode No. 2	6CE5	6.3	ET-1562-0	1.0	---	P4	C	3900
{6BN11†	6.3	B3-7X98-W	1.0	---	P4	C	Pent. No. 1	6CG3†	6.3	B3-0407-0	0.0	90	P3	G	★
{6BN11	6.3	B3-3542-6	1.0	---	P4	C	Pent. No. 2	{6CG7	6.3	EV-7608-9	3.7	---	P4	D	1640
6BQ5	6.3	EV-2793-0	1.0	---	P4	C		{6CG7	6.3	EV-2103-9	3.7	---	P4	D	1640
6BQ6	6.3	HS-5048-0	12.0	---	P4	C	Re-test using EV-1793-0	{6CG8	6.3	EV-9678-0	1.2	---	P4	C	2900
{6BQ7A	6.3	EV-7508-9	2.0	---	P4	C	Cap = P	{6CH3†	6.3	EV-1203-0	2.0	---	P4	C	3650
{6BQ7A	6.3	EV-2103-9	2.0	---	P4	C	Triode No. 1	{Model 539C	6.3	EV-0209-0	0.0	91	P3	G	★
{6BR8	6.3	EV-9678-0	0.8	---	P4	D	Triode Sect.	{6CJ3†	6.3	EV-0209-0	0.0	90	P3	G	★
{6BR8	6.3	EV-1203-0	1.0	---	P4	C	Pent. Sect.	{Model 539C	6.3	EV-0209-0	0.0	91	P3	G	★
{6BS3†	6.3	EV-0209-0	0.0	85	P3	G	Triode Sect.	{6CK3†	6.3	EV-0209-0	0.0	91	P3	G	★
{Model 539C	6.3	No Adapter	Required.	---	---	---	Use Adapter SA-4, 1050-144, Note 7	{Model 539C	6.3	No Adapter	Required.	---	---	---	---
{6BU8	6.3	EV-7821-9	0.0	---	---	D	Pent. No. 1, Hold down P1 and press P4.	{6CL3†	6.3	EV-0209-0	0.0	91	P3	G	★
{6BU8	6.3	EV-7321-6	0.0	---	---	D	Pent. No. 2, Hold down P1 and press P4.	{Model 539C	6.3	No Adapter	Required.	---	---	---	---
{6BV11†	6.3	B3-7W98-X	2.0	---	P4	D		6CL5	6.3	HS-4013-0	20.0	---	P4	C	3250
{6BV11	6.3	B3-6345-2	2.0	---	P4	D	Pent. No. 1	6CL6	6.3	EV-2631-7	1.7	---	P4	C	5000
6BW3†	6.3	B3-0407-0	0.0	87	P3	G	Pent. No. 2	{6CL8	6.3	EV-9678-0	1.0	---	P4	D	2500
{6BW8	6.3	EV-6987-0	0.8	---	P4	D		{6CL8	6.3	EV-1203-0	0.7	---	P4	C	5000
{6BW8	6.3	EV-0302-0	0.0	0	P1	D	Pent. Sect.	{6CM3†	6.3	EV-0279-0	0.0	91	P3	G	★
{6BW8	6.3	EV-0102-0	0.0	0	P1	G	Diode No. 1	{Model 539C	6.3	No Adapter	Required.	---	---	---	---
{6BW11†	6.3	B3-X89W-7	1.0	---	P4	C	Diode No. 2	6CM6	6.3	EV-3917-0	3.3	---	P4	D	2600
{6BW11	6.3	B3-3542-6	0.6	---	P4	C	Pentode No. 1	{6CM7	6.3	EV-7603-0	4.7	---	P4	D	1260
{6BY6	6.3	ET-1562-7	1.0	---	P4	D	Pentode No. 2	{6CM7	6.3	EV-8109-0	4.0	---	P4	C	2800
{6BY6	6.3	ET-7562-1	1.4	---	---	E	Grid No. 3, Hold down P1 and Press P4	{6CN7	6.3	EV-7806-0	1.3	---	P4	E	750
{6BY8	6.3	EV-1789-2	1.0	---	P4	C		{6CN7	6.3	EV-0203-0	0.0	0	P1	G	★
{6BY8	6.3	EV-0603-0	0.0	0	P1	C	Pent. Sect.	{6CN7	6.3	EV-0103-0	0.0	0	P1	G	★
{6BY11†	6.3	B3-8XW9-0	13.0	---	P4	D	Diode Sect.	6CQ4	6.3	HY-0503-0	0.0	87	P3	G	★
{6BY11	6.3	B3-3762-5	2.2	---	P4	E	Pent. No. 1	{6CQ8	6.3	EV-2637-0	0.6	---	P4	D	2800
6BZ3†	6.3	B3-0W07-0	0.0	17	P1	G	Pent. No. 2	{6CQ8	6.3	EV-9108-0	1.1	---	P4	D	4400

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	
{6CS6	6.3	ET-1562-7	0.0	---	P4	D	Grid No. 1 Plate Volts=Low	{6DS4†	6.3	DR-4208-0	0.4	---	P4	C	4700 Plate Volts=Low	
{6CS6	6.3	ET-7562-1	0.0	---	P4	D	Grid No. 3 Plate Volts=Low	{Model 539C:	6.3	13-4208-0	0.4	---	P4	C	4700 Plate Volts=Low	
{6CS7	6.3	EV-7608-0	3.7	---	P4	D	Triode No. 1	{6DS4	6.3	ET-1562-0	2.0	---	P4	C	3800	
{6CS7	6.3	EV-3109-0	5.3	---	P4	C	Triode No. 2	{6DS5	6.3	B3-0407-0	0.0	91	P3	G	★	
{6CT3	6.3	EV-0209-0	0.0	90	P3	G	Hold down P1 and Press P4	{6DT3†	6.3	HY-0503-0	0.0	83	P3	G	★	
{6CU5	6.3	ET-2761-0	1.0	---	---	C	Pent. Sect.	{6DT4	6.3	EV-3917-0	4.4	---	P4	C	3450	
{6CU8	6.3	EV-7236-1	0.8	---	P4	C	Triode Sect.	{6DT5	6.3	ET-1562-7	3.4	---	P4	E	380	
{6CU8	6.3	EV-8901-0	4.6	---	P4	D	Triode Sect.	{6DT6	6.3	ET-1562-7	3.4	---	---	E	315	
{6CW4†	6.3	DR-4208-0	0.5	---	P4	C	Plate Volts=Low. Use Adapter SA-3, 1050-127. Note 7	{6DT6	6.3	ET-7562-1	1.8	---	---	D	2500 Triode No. 1	
{Model 539C:								{6DT8	6.3	EV-7608-9	1.6	---	P4	D	2500 Triode No. 2	
{6CW4	6.3	13-4208-0	0.5	---	P4	C	Plate Volts=Low	{6DT8	6.3	EV-2103-9	1.6	---	P4	D	2500	
{6CW5	6.3	EV-2793-0	4.0	---	P4	C	Pent. Sect.	{6DU3†	6.3	B3-0407-0	0.0	90	P3	G	★	
{6CX8	6.3	EV-7986-0	2.0	---	P4	C	Triode Sect.	{6DV4†	6.3	13-8207-0	0.8	---	P4	C	7000 Plate Volts=Low	
{6CX8	6.3	EV-2301-0	1.2	---	P4	D	Triode Sect.	{6DW4†	6.3	EV-0209-0	0.0	82	P3	G	★	
{6CY5	6.3	ET-1562-0	1.0	---	P4	C	Plate Volts=Low	{Model 539C:	No Adapter Required.							
{6CY7	6.3	EV-7608-0	1.5	---	P4	D	Triode No. 1	{6DX3	6.3	EV-3697-0	0.6	---	P4	C	6900 Pent. Sect.	
{6CY7	6.3	EV-2109-0	20.0	---	P4	C	Triode No. 2	{6DX8	6.3	EV-1203-0	1.0	---	P4	D	2800 Triode Sect.	
{6CZ5	6.3	EV-3917-0	1.0	---	P4	D	Triode No. 2	{6DZ4	6.3	ET-2105-0	0.8	---	P4	C	5000 Plate Volts=Low	
{6D10†	6.3	B3-9W04-0	1.4	---	P4	D	Triode No. 1	{6DZ8	6.3	EV-3672-0	6.8	---	P4	C	3400 Pent. Sect.	
{6D10	6.3	B3-7506-0	1.4	---	P4	D	Triode No. 2	{6DZ8	6.3	EV-1908-0	2.6	---	P4	E	450 Triode Sect.	
{6D10	6.3	B3-X203-0	1.4	---	P4	D	Triode No. 3	{6EA4†	6.3	B3-0605-0	0.0	---	P1	E	★	
{6DA4	6.3	HY-0503-0	0.0	86	P3	G	★	{6EA5	6.3	ET-1562-0	1.2	---	P4	C	3500	
{6DA5	6.3	EV-1902-0	Vary 100	---	P4	G	Connect a 1 megohm resistor from Plate jack to octal test socket pin No. 7.	{6EA7	6.3	JX-4506-0	0.5	---	P4	E	1100 Triode No. 1	
{Vary Bias to Vary beam angle.								{6EA7	6.3	JX-1203-0	21.0	---	P4	C	4100 Triode No. 2	
{6DB5	6.3	EV-3912-0	1.5	---	---	C	Hold down P1 and Press P4	{6EA8	6.3	EV-2637-0	0.8	---	P4	D	3100 Pent. Sect.	
{6DC6	6.3	ET-1562-7	1.2	---	P4	D	2840	{6EA8	6.3	EV-9108-0	1.4	---	P4	C	5250 Triode Sect.	
{6DE4	6.3	HY-0503-0	0.0	87	P3	G	★	{6EB5	6.3	ET-0205-6	0.0	45	P3	G	★	
{6DE6	6.3	ET-1562-7	1.0	---	P4	E	1260	{6EB5	6.3	ET-0701-6	0.0	45	P3	G	★	
{6DE7	6.3	EV-7608-0	5.0	---	P4	E	3800	{6EB8	6.3	EV-7986-0	0.8	---	P4	C	5000 Pent. Sect.	
{6DE7	6.3	EV-2109-0	19.0	---	P4	C	Triode No. 1	{6EB8	6.3	EV-2301-0	0.6	---	P4	E	1400 Triode Sect.	
{6DG6	6.3	HS-5348-0	1.0	---	---	C	Hold Down P1 and Press P4	{6EF4†	6.3	B3-0605-9	0.0	---	P1	E	★	
{6DJ8	6.3	EV-7608-0	3.0	---	P4	C	Triode No. 1	{6EH4†	6.3	B3-0605-0	0.0	---	P1	E	★	
{6DK3	6.3	EV-2103-0	3.0	---	P4	C	Triode No. 2	{6EH5	6.3	ET-2761-0	1.2	---	P4	C	6300	
{6DK3	6.3	EV-0002-0	0.0	90	P3	G	Cap=P. Reverse Meter	{6EH7	6.3	EV-2781-9	2.8	---	P4	C	3200	
{6DK6	6.3	ET-1562-7	1.0	---	P4	C	4400	{6EH8	6.3	EV-7986-0	1.0	---	P4	D	2700 Pent. Sect.	
{6DL3†	6.3	EV-0002-0	0.0	90	P3	G	★	{6EH8	6.3	EV-2301-0	1.6	---	P4	C	4700 Triode Sect.	
{Model 539C:	No Adapter Required.							{6EJ4†	6.3	B3-0605-0	0.0	---	P1	E	★	
{6DM4	6.3	HY-0503-0	0.0	87	P3	G	★	{6EJ7	6.3	EV-2781-9	1.2	---	P4	C	4900 Cap=G	
{6DN3†	6.3	EV-0209-0	0.0	91	P3	G	★	{6EL4	6.3	HS-0501-0	0.0	---	P1	E	★	
{Model 539C:	No Adapter Required.							{6EM5	6.3	EV-3917-0	3.7	---	P4	D	3200 Cap=G	
{6DN7	6.3	HY-4506-0	3.6	---	P4	E	1200 Triode No. 1	{6EM7	6.3	HY-4506-0	1.6	---	P4	D	C	1000 Triode No. 1
{6DN7	6.3	HY-1203-0	3.0	---	P4	C	4500 Triode No. 2	{6EM7	6.3	HY-1203-0	17.0	---	P4	D	C	6000 Triode No. 2
{6DQ3†	6.3	B3-0407-0	0.0	90	P3	G	★	{6EN4	6.3	HS-0501-0	0.0	---	P1	E	★	
{6DQ4	6.3	JX-0503-0	0.0	80	P3	G	★	{6EQ7	6.3	EV-2763-1	2.6	---	P4	E	850 Pent. Sect.	
{6DQ5	6.3	HS-1043-0	26.0	---	P4	D	3000 Cap=P	{6EQ7	6.3	EV-0803-0	0.0	---	P1	D	★	
{6DQ6	6.3	HS-5048-0	0.0	---	P4	C	5000 Cap=P	{6ER5	6.3	ET-2567-0	0.8	---	P4	C	6600	
{6DR4	6.3	ET-6507-0	1.3	---	P4	D	875 Plate Volts=Low	{6ES5	6.3	ET-2501-0	1.0	---	P4	C	4500	
{6DR7	6.3	EV-7608-0	1.3	---	P4	D	1000 Triode No. 1	{6ES8	6.3	EV-7608-0	2.4	---	P4	C	7500 Triode No. 1	
{6DR7	6.3	EV-2103-0	18.0	---	P4	C	4100 Triode No. 2	{6ES8	6.3	EV-2103-0	2.4	---	P4	C	7500 Triode No. 2	

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	
{6ET7	6.3	EV-7986-0	2.0	---	P4	C	Pent. Sect.	{6FY7†	6.3	B3-WX09-0	1.7	---	P4	D	1050	Triode No. 1
{6ET7	6.3	EV-0301-0	0.0	---	P1	D	Diode No. 1	{6FY7	6.3	B3-3507-0	12.5	---	P4	C	6900	Triode No. 2
{6ET7	6.3	EV-0201-0	0.0	---	P1	D	Diode No. 2	{6FY8	6.3	EV-3672-0	10.0	---	P4	C	3400	Pent. Sect.
{6EU7	6.3	BS-8709-0	1.3	---	P4	D	Triode No. 1	{6FY8	6.3	EV-1908-0	3.0	---	P4	E	940	Triode Sect.
{6EU7	6.3	BS-5604-0	1.3	---	P4	D	Triode No. 2	{6G11†	6.3	B3-8XW9-0	1.8	---	P4	D	2700	Pentode No. 1
{6EU8	6.3	EV-7198-0	0.8	---	P4	D	Pent. Sect.	{6G11	6.3	B3-3672-4	3.0	---	P4	E	300	Pentode No. 2
{6EU8	6.3	EV-2306-0	1.4	---	P4	C	Triode Sect.	{6GA7†	6.3	B3-4735-0	12.0	---	P4	D	2600	Pent. Sect.
{6EV5	6.3	ET-1562-0	1.2	---	P4	C	5500	{6GA7	6.3	B3-0X08-0	0.0	77	P3	G	★	Diode Sect.
{6EV7	6.3	EV-7608-0	1.0	---	P4	C	3000	6GB5	6.3	EV-2078-0	16.0	---	P4	C	5000	Cap=P, Use Adapter SA-4, 1050-168
{6EV7	6.3	EV-2103-0	1.0	---	P4	C	3000	6GC5	6.3	EV-6917-0	1.5	---	---	C	5500	Hold down P1 and Press P4
{6EW6	6.3	ET-1562-7	0.6	---	P4	C	6500	6GE5†	6.3	B3-X72W-0	15.0	---	P4	C	3500	---
{6EW7	6.3	EV-7603-0	5.4	---	P4	E	1200	{6GE8	6.3	EV-8917-0	1.4	---	P4	D	1700	Pent. Sect.
{6EW7	6.3	EV-2109-0	17.0	---	P4	C	5000	{6GES	6.3	EV-3602-0	20.0	---	P4	C	3900	Triode Sect.
{6EX6	6.3	HS-5083-0	18.0	---	P4	C	4400	6GF5†	6.3	B3-X72W-0	16.0	---	P4	D	3200	---
Tubes indicating shorts: Re-test using HS-5013-0								{6GF7†	6.3	EV-9801-0	2.0	---	P4	E	600	Triode No. 1, Use Adapter SA-4, 1050-144, Note 7
6EY6	6.3	HS-5348-0	5.8	---	P4	D	2800	{6GF7	6.3	EV-2603-0	16.0	---	P4	C	5000	Triode No. 2
6EZ5	6.3	HS-5343-0	15.0	---	P4	E	1050	Model 539C: No Adapter Required.	---	---	---	---	---	---	---	---
{6EZ8	6.3	FU-9800-0	5.0	---	P4	D	2500	{6GH8	6.3	EV-2637-0	1.7	---	P4	D	2500	Pent. Sect.
{6EZ8	6.3	FU-7600-0	5.0	---	P4	D	2500	{6GH8	6.3	EV-9108-0	1.3	---	P4	C	5300	Triode Sect.
{6EZ8	6.3	FU-2301-0	1.4	---	P4	D	2500	{6GU5†	6.3	EV-6073-0	5.3	---	---	C	4400	Cap=P, Hold Down P1 and Press P4, Use Adapter SA-4, 1050-144, Note 7
{6FA7	6.3	EV-7936-1	1.0	---	P4	E	700	Model 539C: No Adapter Required.	---	---	---	---	---	---	---	---
{6FA7	6.3	EV-7186-9	1.0	---	P4	E	700	{6GU7	6.3	EV-2671-0	1.0	---	P4	C	4900	Pent. Sect.
{6FA7	6.3	EV-9306-1	0.0	---	P1	D	Diode Sect.	{6GU7	6.3	EV-9803-0	4.2	---	P4	C	6100	Triode Sect.
{6FD6	6.3	ET-1657-2	0.8	---	P1	C	★	{6GU8	6.3	EV-2637-0	1.0	---	P4	D	3100	Pent. Sect.
{6FD7	6.3	EV-7603-0	0.8	---	P4	E	1000	{6GU8	6.3	EV-9108-0	1.0	---	P4	C	5000	Triode Sect.
{6FD7	6.3	EV-2109-0	3.4	---	P4	C	4700	6GK5	6.3	ET-2507-6	1.2	---	P4	C	6500	---
6FE5	6.3	HS-5348-0	10.0	---	P4	C	4700	6GK6	6.3	EV-2781-3	1.0	---	P4	C	6300	---
6FG5	6.3	ET-1567-0	1.0	---	P4	C	1500	{6GL7	6.3	JX-4506-0	1.3	---	P4	D	1250	Triode No. 1
{6FG7	6.3	EV-9678-0	1.0	---	P4	D	2650	{6GL7	6.3	JX-1203-0	15.0	---	P4	C	7500	Triode No. 2
{6FG7	6.3	EV-1203-0	1.4	---	P4	C	4700	6GM5	6.3	EV-6917-0	0.5	---	P4	B	5500	---
6FH5	6.3	ET-2507-0	1.0	---	P4	C	5500	6GM6	6.3	ET-1562-7	1.0	---	P4	C	6000	Pent. Sect.
{6FH8	6.3	FU-6970-0	6.6	---	P4	D	1550	{6GN8	6.3	EV-7986-0	2.0	---	P4	C	5100	Triode Sect.
{6FH8	6.3	FU-6870-0	4.1	---	P4	E	820	{6GN8	6.3	EV-2301-0	1.6	---	P4	C	800	Diode No. 1
{6FH8	6.3	FU-6170-0	4.1	---	P4	E	820	{6GO7	6.3	EV-0809-0	0.0	0	P1	★	★	Diode No. 2
{6FH8	6.3	FU-2300-0	7.1	---	P4	C	3400	{6GO7	6.3	EV-0607-0	0.0	0	P1	★	★	Diode No. 3
{6FJ7†	6.3	B3-WX09-0	3.0	---	P4	E	1500	{6GT5	6.3	EV-0201-0	0.0	0	P1	★	★	Diode No. 3
{6FJ7	6.3	B3-3507-0	3.4	---	P4	C	4800	Model 539C: No Adapter Required.	---	---	---	---	---	---	---	---
{6FM7†	6.3	B3-WX09-0	2.6	---	P4	E	600	6GT5	6.3	EV-6973-0	5.3	---	---	C	4400	Hold Down P1 and Press P4, Use Adapter SA-4, 1050-144, Note 7
{6FM7	6.3	B3-8507-0	16.0	---	P4	C	4500	Model 539C: No Adapter Required.	---	---	---	---	---	---	---	---
{6FM8	6.3	EV-8907-0	1.3	---	P4	C	750	6GU5	6.3	ET-1562-0	0.4	---	P4	C	8500	Triode No. 1
{6FM8	6.3	EV-0601-0	0.0	0	P1	★	Triode Sect.	{6GU7	6.3	EV-7608-0	5.2	---	P4	D	1730	Triode No. 2
{6FM8	6.3	EV-0203-0	0.0	0	P1	★	Diode No. 1	{6GU7	6.3	EV-2103-0	5.2	---	P4	D	1730	Triode No. 2
6FQ5	6.3	ET-2507-6	1.2	---	P4	C	5000	6GV5†	6.3	B3-90XW-0	14.0	---	P4	C	4400	Cap=P
6FQ5A	6.3	ET-2507-6	1.2	---	P4	C	6500	6GW6	6.3	HS-5048-0	0.0	---	P4	C	5000	Cap=P, Plate Volts=Low
{6FO7	6.3	EV-7608-0	3.7	---	P4	D	1640	{6GW8	6.3	EV-8637-1	1.0	---	P4	C	5500	Pent. Sect.
{6FO7	6.3	EV-2103-0	3.7	---	P4	D	1640	{6GW8	6.3	EV-1902-0	0.7	---	P4	C	550	Triode Sect.
6FS5	6.3	ET-1567-0	0.2	---	P4	C	5500	6GX6	6.3	ET-1562-7	1.5	---	P4	E	900	---
6FV6	6.3	ET-1567-2	2.0	---	P4	C	3500	{6GX7	6.3	EV-2671-0	1.0	---	P4	C	4400	Pent. Sect.
{6FV8	6.3	EV-9678-0	1.0	---	P4	D	2650	{6GX7	6.3	EV-9801-0	1.4	---	P4	C	5300	Triode Sect.
{6FV8	6.3	EV-1203-0	1.6	---	P4	D	4900	6GY5†	6.3	B3-507W-0	17.0	---	P4	C	4800	Cap=P
6FW5	6.3	HS-1583-0	14.0	---	P4	C	4100	6GY6	6.3	ET-1562-7	1.6	---	P4	E	1000	---

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS
{6GY8	6.3	EV-0607-0	0.0	---	P1	E	Triode No. 1	{6J4	6.3	ET-1702-0	2.0	---	P4	B	7000
{6GY8	6.3	FU-3908-0	1.5	---	P4	D	Triode No. 2	{6J6	6.3	ET-5207-0	1.8	---	P4	C	3340
{6GY8	6.3	FU-1200-0	3.4	---	P4	B	Triode No. 3	{6J6	6.3	ET-6107-0	1.8	---	P4	C	3340
6GZ5	6.3	ET-2761-0	2.7	---	P4	D		{6J9†	6.3	EV-780W-0	1.2	---	P4	D	3200
6HA5	6.3	ET-1507-6	1.2	---	P4	B		{6J9	6.3	EV-960W-0	1.2	---	P4	D	3200
6HA6	6.3	EV-2761-3	0.8	---	P4	C		{6J9	6.3	EV-2103-0	1.2	---	P4	D	3200
6HB5†	6.3	B3-X72W-0	3.2	---	P4	C		{6J10†	6.3	B3-7468-5	0.0	---	P4	E	250
6HB6	6.3	EV-2781-9	1.0	---	P4	B	Pent. Sect.	{6J10	6.3	B3-X923-0	2.6	---	P4	C	4300
{6HB7	6.3	EV-2671-0	1.4	---	P4	D	Triode Sect.	{6J11†	6.3	B3-X978-W	0.3	---	P4	C	6000
{6HB7	6.3	EV-9801-0	1.0	---	P4	B	Cap-P, Hold Down P1 and Press P4, Use Adapter SA-4, 1050-144. Note 7	{6J11	6.3	B3-5326-4	0.3	---	P4	C	6000
6H-B25	6.3	EV-2079-8	12.0	---	P4	C	Pent. Sect.	6JA5†	6.3	B3-9634-0	1.5	---	P4	C	3900
6HC8	6.3	EV-3672-0	2.6	---	P4	D	Triode Sect.	6JB5†	6.3	B3-96WX-0	15.0	---	P4	E	1050
{6HC8	6.3	EV-1908-0	0.6	---	P4	E	Pent. Sect.	{6JB6†	6.3	EV-2013-8	5.3	---	---	C	4400
6HD5†	6.3	B3-X79W-0	15.0	---	P4	C	Triode Sect.	{Model	539C: No Adapter Required.						
{6HD7	6.3	EV-2671-0	1.0	---	P4	C	Pent. Sect.	{6JB8	6.3	EV-2637-0	4.4	---	P4	E	650
{6HD7	6.3	EV-9803-0	1.7	---	P4	C	Triode Sect.	{6JB8	6.3	EV-9108-0	3.2	---	P4	D	1450
6HE5†	6.3	B3-96WX-0	4.8	---	P4	D		6JC5†	6.3	B3-96WX-0	4.8	---	P4	D	3200
{6HE7†	6.3	B3-95X8-0	15.0	---	P4	C	Pent. Sect.	6JC6	6.3	EV-2781-9	0.8	---	P4	C	6500
{6HE7	6.3	B3-0204-0	0.0	89	P3	G	Diode Sect.	{6JC8	6.3	EV-2637-0	1.0	---	P4	D	2600
6HF5†	6.3	B3-90XW-0	21.0	---	P4	C	Cap-P	{6JC8	6.3	EV-8901-0	1.0	---	P4	C	4000
{6HF8	6.3	EV-7986-0	1.8	---	P4	C	Pent. Sect.	6JD5†	6.3	B3-2704-3	0.0	---	P4	B	9400
{6HF8	6.3	EV-2301-0	1.2	---	P4	D	Triode Sect.	6JD6	6.3	EV-2781-9	1.0	---	P4	C	6000
6HG5	6.3	ET-1562-0	2.1	---	P4	D		{6JE6†	6.3	EV-2073-8	7.0	---	P4	C	5800
6HG8	6.3	EV-2893-0	0.6	---	P4	D	Pent. Sect.	{Model	539C: No Adapter Required.						
{6HG8	6.3	EV-6703-0	5.4	---	P4	C	Triode Sect.	{6JE8	6.3	EV-7986-0	1.2	---	P4	C	5300
6HJ5†	6.3	B3-X792-W	16.0	---	P4	C		{6JE8	6.3	EV-2301-0	2.4	---	P4	E	1550
{6HJ7	6.3	EV-2671-0	1.0	---	P4	C	Pent. Sect.	{6JF6†	6.3	EV-2073-8	6.0	---	---	C	5900
{6HJ7	6.3	EV-9803-0	1.7	---	P4	C	Triode Sect.	{Model	539C: No Adapter Required.						
{6HJ8	6.3	EV-2631-9	1.0	---	P4	C	Pent. Sect.	{6JF8	6.3	HR-5046-0	0.0	---	P4	C	7250
6HK5	6.3	ET-1502-0	0.0	0	P1	G	Diode Sect.	{6JF8	6.3	HR-0802-0	0.0	85	P3	G	★
6HL5	6.3	EV-2793-0	3.0	---	P4	E		6JG5	6.3	EV-7986-0	2.0	---	P4	C	5100
{6HL8	6.3	EV-2637-0	0.8	---	P4	C	Pent. Sect.	{6JG6†	6.3	EV-2973-6	6.0	---	---	C	5900
{6HL8	6.3	EV-9108-0	1.4	---	P4	C	Triode Sect.	{Model	539C: No Adapter Required.						
6HM5	6.3	ET-1507-6	1.2	---	P4	C		6JH5†	6.3	B3-2704-3	0.0	---	P4	B	9400
6HM6	6.3	EV-2781-9	0.8	---	P4	C		6JH6	6.3	ET-1562-7	1.2	---	P4	C	3500
6HO5	6.3	ET-1507-6	1.4	---	P4	C		{6JH8	6.3	EV-6937-1	2.4	---	P4	E	800
6HR5	6.3	ET-1562-0	2.0	---	P4	D		{6JH8	6.3	EV-6837-1	2.4	---	P4	E	800
6HR6	6.3	ET-1567-2	1.4	---	P4	C		6JK5†	6.3	B3-2704-3	0.0	---	P4	B	9400
6HS5†	6.3	B3-2704-3	0.0	---	P4	B		6JK6	6.3	ET-1562-7	0.4	---	P4	B	6600
6HS6	6.3	ET-1567-2	1.8	---	P4	C		{6JK8	6.3	EV-7608-9	2.8	---	P4	E	1450
{6HS8	6.3	EV-7821-9	1.0	---	P4	D	Pent. No. 1	{6JK8	6.3	EV-2103-9	1.2	---	P4	C	7200
{6HS8	6.3	EV-7321-6	1.0	---	P4	D	Pent. No. 2	6JL6	6.3	ET-1562-7	12.0	---	P4	C	4350
6HT6	6.3	EV-2781-9	0.8	---	P4	C		{6JL8	6.3	EV-7986-0	2.4	---	P4	C	4800
6HV5†	6.3	B3-7204-3	0.0	5	P1	G		{6JL8	6.3	EV-2301-0	2.0	---	P4	D	2900
{6HW8	6.3	EV-6237-9	1.0	---	P4	D	Cap-P	6JM6†	6.3	B3-5032-W	12.0	---	P4	C	4100
Make external connection from Pin 8 of octal socket to plate jack and connect Pin 1 to Pin 7 on octal socket.															
6HZ5†	6.3	B3-2704-3	0.0	---	P4	B		6JN6†	6.3	B3-X732-4	12.0	---	P4	C	4100
6HZ6	6.3	ET-1562-7	1.1	---	P4	D		{6JN8	6.3	EV-9678-0	1.0	---	P4	D	3200
{6HZ8	6.3	EV-7986-0	1.8	---	P4	C	Pent. Sect.	{6JN8	6.3	EV-1203-0	1.8	---	P4	D	3800
{6HZ8	6.3	EV-2301-0	1.2	---	P4	D	Triode Sect.	{6JQ6	6.3	EV-7139-6	25.0	---	P4	D	2900
								{6JQ6	6.3	EV-0609-0	0.0	0	P1	G	★

Triode No. 1
Triode No. 2
Triode No. 1
Triode No. 2
Triode No. 3
Pent. No. 1 Plate Volts=Low
Pent. No. 2
Pent. No. 1
Pent. No. 2

Cap-P, Hold Down P1
and Press P4, Use Adapter
SA-4, 1050-144. Note 7
Pent. Sect.
Triode Sect.

Pent. Sect.
Triode Sect.

Cap-P, Plate Volts=Low, Use
Adapter SA-4, 1050-144. Note 7
Pent. Sect.
Triode Sect.

Cap-P, Hold Down P1
and Press P4, Use Adapter
SA-4, 1050-144. Note 7
Pent. Sect. Cap-P
Plate Volts=Low
Diode Sect.

Hold Down P1 and Press P4, Use
Adapter SA-4, 1050-144. Note 7
Plate No. 1, Disregard Mean
Flash in short testing
Plate No. 2, Disregard Mean
Flash in short testing

Triode No. 1
Triode No. 2
Pent. Sect.
Triode Sect.
Cap-P

Pent. Sect.
Triode Sect.
Pent. Sect.
Diode Sect.

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	
{6JR6†	6.3	EV-2913-6	21.5	---	P4	D	2800	Use Adapter SA-4, 1050-144, Note 7	{6KT8	6.3	EV-7986-0	0.8	---	C	4000	Pent. Sect.
{Model 539C: No Adapter Required.									{6KT8	6.3	EV-2301-0	1.2	---	D	1900	Triode Sect.
{6JS6A†	6.3	B3-5032-4	25.0	---	P4	C	3150	Cap = P	{6KU8	6.3	EV-7986-0	2.0	---	B	6300	Pent. Sect.
{6JT6†	6.3	EV-2973-6	22.0	---	P4	C	4100	Use Adapter SA-4, 1050-144, Note 7	{6KU8	6.3	EV-0301-0	0.0	---	D	★	Diode No. 1
{Model 539C: No Adapter Required.									{6KU8	6.3	EV-0201-0	0.0	---	D	★	Diode No. 2
{6JT8	6.3	EV-7986-0	1.6	---	P4	C	5700	Pent. Sect. Use "Min. and Sub-Min." Shorts Position	{6KV6†	6.3	EV-2913-6	23.0	---	D	2850	Use Adapter SA-4, 1050-144, Note 7
{6JT8	6.3	EV-2301-0	2.6	---	P4	E	950	Triode Sect.	{Model 539C: No Adapter Required.							
{6JU6†	6.3	EV-2013-8	21.5	---	P4	D	2800	Cap = P, Use Adapter SA-4, 1050-144, Note 7	{6KV8	6.3	EV-7986-0	1.5	---	B	7800	Pent. Sect.
{Model 539C: No Adapter Required.									{6KV8	6.3	EV-2301-0	1.0	---	D	2400	Triode Sect.
{6JU8	6.3	EV-0809-0	0.0	0	P1	G	★	Diode No. 1	{6KX8	6.3	EV-9708-6	1.3	---	E	800	Triode No. 1
{6JU8	6.3	EV-0708-0	0.0	0	P1	G	★	Diode No. 2	{6KX8	6.3	EV-1302-6	1.3	---	E	800	Triode No. 2
{6JU8	6.3	EV-0203-0	0.0	0	P1	G	★	Diode No. 3	{6KY6	6.3	EV-2781-3	1.0	---	B	10000	
{6JU8	6.3	EV-0102-0	0.0	0	P1	G	★	Diode No. 4	{6KY8†	6.3	EV-2673-0	10.0	---	C	3450	Pent. Sect. Use Adapter SA-4, 1050-144, Note 7
{6JV6†	6.3	B3-X732-W	15.0	---	P4	C	4700		{6KY8†	6.3	EV-9801-0	1.4	---	D	1150	Triode Sect.
{6JV8	6.3	EV-7986-0	1.2	---	P4	C	5200	Pent. Sect.	{Model 539C: No Adapter Required.							
{6JV8	6.3	EV-2301-0	1.4	---	P4	D	2200	Triode Sect.	{6KZ8	6.3	EV-2673-0	1.4	---	D	2850	Pent. Sect.
{6JY8	6.3	EV-7986-0	2.0	---	P4	C	4750	Pent. Sect.	{6KZ8	6.3	EV-9108-0	1.8	---	C	3800	Triode Sect.
{6JY8	6.3	EV-2301-0	1.2	---	P4	C	6500	Triode Sect.	6L6	6.3	HS-5348-1	3.0	---	C	3300	
{6JZ6†	6.3	B3-5032-4	16.0	---	P4	C	4400	Cap = P	6LB6†	6.3	B3-5032-4	8.0	---	C	6300	Cap = P, Plate Valve=Low
{6JZ8†	6.3	B3-7489-0	7.6	---	P4	C	4050	Pent. Sect.	{6LB8	6.3	EV-7986-0	2.2	---	C	5350	Pent. Sect.
{6K6	6.3	HS-5348-0	9.0	---	P4	C	1150	Triode Sect.	{6LB8	6.3	EV-2301-0	1.6	---	E	★	Cap = G
{6K11†	6.3	B3-9W04-8	3.2	---	P4	E	1000		6LC6	6.3	HS-0506-1	0.0	---	E	1260	Cap = G
{6K11	6.3	B3-7506-8	1.3	---	P4	D	1950	Triode No. 1	{6LC8	6.3	EV-6987-3	1.2	---	E	1260	Pent. Sect.
{6K11	6.3	B3-X203-8	1.3	---	P4	E	800	Triode No. 2	{6LC8	6.3	EV-2103-0	2.4	---	E	1260	Triode Sect.
{6KA8	6.3	EV-6983-7	1.2	---	P4	E	1260	Triode No. 3	6LD6	6.3	EV-2781-3	1.6	---	C	5500	
{6KA8	6.3	EV-2103-0	2.4	---	P4	E	1260	Pent. Sect.	{6LE8	6.3	EV-9683-7	2.0	---	E	800	Pent. No. 1
{6KD6†	6.3	B3-5032-4	20.0	---	P4	C	7500	Cap = P	{6LE8	6.3	EV-9183-2	2.0	---	E	800	Pent. No. 2
{6KD8	6.3	EV-2637-0	0.4	---	P4	C	2900	Pent. Sect.	{6LF8	6.3	EV-7986-0	0.6	---	C	5350	Pent. Sect.
{6KE8	6.3	EV-9108-0	1.5	---	P4	C	4700	Triode Sect.	{6LF8	6.3	EV-2301-0	1.0	---	D	2450	Triode Sect.
{6KE8	6.3	EV-2637-0	0.6	---	P4	C	5100	Pent. Sect.	6LG6†	6.3	B3-50X4-0	20.0	---	C	5650	Cap = P
{6KE8	6.3	EV-9108-0	1.4	---	P4	C	4600	Triode Sect.	6LH6	6.3	HS-0506-1	0.0	---	E	★	Cap = G
{6KF8	6.3	EV-7821-9	1.0	---	P4	C	350	Pent. No. 1	6LJ6	6.3	HS-0506-3	0.0	---	E	★	Cap = G
{6KF8	6.3	EV-7321-6	1.0	---	P4	E	350	Pent. No. 2	{6LJ8	6.3	EV-9678-0	0.6	---	C	5600	Pent. Sect.
{6KL8	6.3	EV-2763-1	0.0	---	P4	E	350	Pent. No. 2	{6LJ8	6.3	EV-1203-0	1.8	---	C	4700	Triode Sect.
{6KL8	6.3	EV-0803-0	0.0	---	P1	D	★	Diode Sect.	{6LM8	6.3	EV-2637-0	1.6	---	D	2500	Pent. Sect.
{6KM6†	6.3	EV-2073-8	20.0	---	P4	C	3000	Cap = P, Use Adapter SA-4, 1050-144, Note 7	{6LM8	6.3	EV-9108-0	1.2	---	C	5000	Triode Sect.
{Model 539C: No Adapter Required.									{6LN8	6.3	EV-2637-1	1.2	---	C	3000	Pent. Sect.
{6KM8	6.3	EV-7986-0	0.0	---	---	D	1075	Tetrode Plate No. 1, Hold down PI and Press P4	{6LN8	6.3	EV-9108-6	4.8	---	C	3000	Triode Sect.
{6KM8	6.3	EV-7286-0	0.0	---	---	D	1100	Tetrode Plate No. 2, Hold down PI and Press P4	{6LQ6†	6.3	EV-2073-8	7.0	---	C	5800	Cap = P, Plate Valve=Low, Use Adapter SA-4, 1050-144, Note 7
{6KM8	6.3	EV-7186-0	0.0	---	---	D	1100	Tetrode Plate No. 3, Hold down PI and Press P	{Model 539C: No Adapter Required.							
{6KM8	6.3	EV-0306-0	0.0	---	P1	D	★	Diode Sect.	{6LQ8	6.3	EV-7986-0	1.5	---	B	7800	Pent. Sect.
{6KN6†	6.3	B3-5032-4	19.0	---	P4	C	4400	Cap = P	{6LQ8	6.3	EV-2301-0	1.2	---	C	5900	Triode Sect.
{6KN8	6.3	EV-7608-0	2.2	---	P4	B	7900	Triode No. 1	6LR6†	6.3	B3-5032-4	25.0	---	C	4250	Cap = P
{6KN8	6.3	EV-2103-0	2.2	---	P4	B	7900	Triode No. 2	{6LR8†	6.3	EV-2673-0	10.0	---	C	3500	Pent. Sect. Use Adapter SA-4, 1050-144, Note 7
{6KR8	6.3	EV-7986-0	2.0	---	P4	C	6600	Pent. Sect.	{6LR8	6.3	EV-9801-0	3.6	---	E	650	Triode Sect.
{6KR8	6.3	EV-2301-0	1.2	---	P4	C	5900	Triode Sect.	{Model 539C: No Adapter Required.							
{6KS6	6.3	ET-2751-6	0.0	---	P4	E	250	Unimul Grid. Plates Valve=Low	{6LT8	6.3	EV-9321-0	0.8	---	C	5350	Pent. Sect.
{6KS6	6.3	ET-6751-2	0.4	---	P4	D	570	Quadrature Grid. Plate Valve=Low	{6LT8	6.3	EV-0807-0	0.0	19	G	★	Diode No. 1
{6KT6	6.3	EV-2781-9	1.0	---	P4	C	7500		{6LT8	6.3	EV-0607-0	0.0	19	G	★	Diode No. 2

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS
{6LU8†	6.3	B3-6489-0	10.0	---	P4	C	Pent. Sect.	{6Q11†	6.3	B3-9W04-8	3.2	---	P4	D	Triode No. 1
{6LU8	6.3	B3-W20X-0	3.6	---	P4	E	Triode Sect.	{6Q11	6.3	B3-7506-8	1.3	---	P4	E	Triode No. 2
{6LV6†	6.3	B3-5032-4	23.0	---	P4	C	Cap = P	{6Q11	6.3	B3-X203-8	1.3	---	P4	E	Triode No. 3
6LW6	6.3	HY-5032-0	20	---	P4	C	Cap = P	6R4	6.3	EV-1803-0	5.0	---	P4	D	2500
6LX6†	6.3	B3-5032-4	20.0	---	P4	C	Cap = P	6S4	6.3	EV-6902-0	3.2	---	P4	D	2840
{6LY8	6.3	EV-7986-0	2.9	---	P4	C	Pent. Sect.	{6SN7	6.3	HY-4506-2	3.7	---	P4	D	1640
{6LY8	6.3	EV-2301-0	1.4	---	P4	C	Triode Sect.	{6SN7	6.3	HY-1203-5	3.7	---	P4	D	1640
{6LZ6†	6.3	EV-6073-8	25.0	---	P4	E	Cap-P, Use Adapter SA-4, 1050-144, Note 7	6T4	6.3	ET-2105-0	1.4	---	P4	C	4400
{Model 539C: No Adapter Required.								6T8	6.3	EV-8907-6	1.3	---	P4	E	750
6M3	6.3	JS-0003-0	0.0	89	P3	G	Cap-P, Reverse Meter, Start to B.	6T8	6.3	EV-0607-1	0.0	0	P1	G	★
{6M11†	6.3	B3-2X3W-0	0.6	---	P4	C	Pent. Sect.	6T8	6.3	EV-0203-7	0.0	0	P1	G	★
6M11	6.3	B3-8709-0	1.1	---	P4	C	Triode No. 1	6T8	6.3	EV-0107-8	0.0	0	P1	G	★
{6M11	6.3	B3-5604-0	1.1	---	P4	C	Triode No. 2	6T9†	6.3	B3-8XW9-0	2.4	---	P4	C	3300
6MA6	6.3	DY-0607-4	0.0	---	P1	E	Cap = P	6T9	6.3	B3-4205-0	0.8	---	P4	C	1620
6MB6†	6.3	B3-5032-4	17.0	---	P4	C	Cap = P	6T10†	6.3	B3-8XW9-0	2.2	---	P4	C	3800
{6MB8	6.3	EV-9678-0	0.6	---	P4	C	Pent. Sect.	6T10	6.3	B3-3762-5	1.6	---	P4	E	375
{6MB8	6.3	EV-1203-0	0.8	---	P4	C	Triode Sect.	6U8	6.3	EV-2637-0	0.8	---	P4	C	2400
{6MC6†	6.3	EV-2073-8	20.0	---	P4	C	Cap-P, Use Adapter SA-4, 1050-144, Note 7	6U8	6.3	EV-9108-0	1.0	---	P4	C	5350
{Model 539C: No Adapter Required.								6U9†	6.3	FW-3782-4	1.5	---	P4	C	4400
{6MD8†	6.3	EV-6307-0	4.0	---	P4	D	Triode No. 1, Use Adapter SA-4, 1050-144, Note 7	6U9	6.3	FW-W901-0	4.5	---	P4	C	3150
6MD8	6.3	EV-8207-0	4.0	---	P4	D	Triode No. 2	6U10†	6.3	B3-9W04-0	3.8	---	P4	E	1225
{6MD8	6.3	EV-9107-0	4.0	---	P4	D	Triode No. 3	6U10	6.3	B3-7506-0	2.2	---	P4	E	375
{Model 539C: No Adapter Required.								6U10	6.3	B3-X203-0	3.8	---	P4	E	1225
6ME6†	6.3	EV-6073-8	7.0	---	P4	C	Cap-P, Plate Volts=Low, Use Adapter SA-4, 1050-144, Note 7	6V3	6.3	EV-0002-0	0.0	91	P3	G	★
{Model 539C: No Adapter Required.								6V5	6.3	HY-5340-0	15.0	---	P4	D	2600
6ME8	6.3	EV-6937-2	2.0	---	P4	D	Plate No. 1	6V6	6.3	HS-5348-1	3.3	---	P4	D	2600
6ME8	6.3	EV-6837-2	2.0	---	P4	D	Plate No. 2	6V9†	6.3	FW-3741-2	1.0	---	---	---	---
6MF8†	6.3	B3-7489-0	4.0	---	P4	C	Pent. Sect.	6V9	6.3	FW-8W09-0	2.4	---	P4	C	3150
6MF8	6.3	B3-W20X-0	2.4	---	P4	D	Triode Sect.	6W4	6.3	HY-0503-0	0.0	90	P3	G	★
6MG8	6.3	EV-2637-0	1.0	---	P4	C	Cap = P	6W6	6.3	HS-5348-0	1.5	---	---	C	5650
6MG8	6.3	EV-9108-0	1.0	---	P4	C	Triode Sect.	6X4	6.3	ET-0607-1	0.0	85	P3	G	★
6MH6†	6.3	B3-5032-4	20.0	---	P4	D	Triode No. 1	6X4	6.3	ET-0107-6	0.0	85	P3	G	★
6MJ8†	6.3	B3-X203-0	3.2	---	P4	D	Triode No. 2	6X5	6.3	HS-0508-1	0.0	85	P3	G	★
6MJ8	6.3	B3-W403-0	3.2	---	P4	D	Triode No. 3	6X5	6.3	HS-0308-1	0.0	85	P3	G	★
6MJ8	6.3	B3-8603-0	3.2	---	P4	D	Triode No. 3	6X8	6.3	EV-7986-1	1.2	---	P4	C	2900
6MK8	6.3	EV-7821-9	0.0	---	---	D	Pent. No. 1, Hold Down P1 and Press P4	6X8	6.3	EV-2306-1	2.0	---	P4	C	3650
6MK8	6.3	EV-7321-6	0.0	---	---	D	Pent. No. 2, Hold Down P1 and Press P4	6X9†	6.3	FW-3782-4	1.5	---	P4	C	4700
6ML8	6.3	EV-6307-0	2.0	---	P4	C	Triode No. 1	6X9	6.3	FW-W901-0	1.2	---	P4	C	3000
6ML8	6.3	EV-8207-0	2.0	---	P4	C	Triode No. 2	6Y9†	6.3	FW-8W97-0	2.2	---	P4	C	6300
6ML8	6.3	EV-9107-0	2.0	---	P4	C	Triode No. 3	6Y9	6.3	FW-1432-0	1.0	---	P4	D	3300
6MN8†	6.3	B3-8603-0	1.0	---	P4	C	Triode No. 1	6Y10†	6.3	B3-8XW9-0	2.7	---	P4	D	3300
6MN8	6.3	B3-W403-0	1.0	---	P4	C	Triode No. 2	6Y10	6.3	B3-3762-5	1.5	---	P4	E	900
6MN8	6.3	B3-X203-0	1.0	---	P4	C	Triode No. 3	6Z4	6.3	FR-0304-0	0.0	88	P3	G	★
6MQ8	6.3	EV-2637-0	1.0	---	P4	C	Pent. Sect.	6Z4	6.3	FR-0204-0	0.0	88	P3	G	★
6MQ8	6.3	EV-9108-0	1.0	---	P4	C	Triode Sect.	6Z10†	6.3	B3-7468-5	0.0	---	P4	E	250
6MU8	6.3	EV-2637-0	2.0	---	P4	C	Pent. Sect.	6Z10	6.3	B3-X923-0	2.6	---	P4	C	4300
6MU8	6.3	EV-9108-0	2.0	---	P4	C	Triode Sect.	7AU7	6.3	B3-7608-0	3.2	---	P4	D	1950
6MV8	6.3	EV-7986-0	1.0	---	P4	C	Pent. Sect.	7AU7	6.3	EV-2103-0	3.2	---	P4	D	1950
6MV8	6.3	EV-2301-0	1.4	---	P4	D	Triode Sect.	7DJ8	7.5	EV-7608-0	3.0	---	P4	C	7750
6MY8†	6.3	B3-6489-0	10.0	---	P4	C	Pent. Sect.	7DJ8	7.5	EV-2103-0	3.0	---	P4	C	7750
6MY8	6.3	B3-W20X-0	3.6	---	P4	E	Triode Sect.								

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	
{7ES8	7.5	EV-7608-0	2.4	---	P4	C	7500	Triode No. 1	{8CB11†	7.5	B3-W89X-7	0.8	---	C	5350	Pent. No. 1
{7ES8	7.5	EV-2103-0	2.4	---	P4	C	7500	Triode No. 2	{8CB11	7.5	B3-5236-4	0.8	---	C	5350	Pent. No. 2
{7EY6	7.5	HS-5348-0	6.8	---	P4	D	2800		{8CG7	7.5	EV-7608-9	3.7	---	D	1640	Triode No. 1
{7FC7	7.5	EV-6908-0	2.4	---	P4	C	6000	Triode No. 1	{8CG7	7.5	EV-2103-9	3.7	---	D	1640	Triode No. 2
{7FC7	7.5	EV-2301-0	2.4	---	P4	C	6000	Triode No. 2	{8CM7	7.5	EV-7603-0	4.7	---	D	1260	Triode No. 1
{7HG8	7.5	EV-2893-0	0.6	---	P4	C	5400	Pent. Sect.	{8CM7	7.5	EV-8109-0	4.0	---	C	2800	Triode No. 2
{7HG8	7.5	EV-6703-0	5.4	---	P4	D	3000	Triode Sect.								
{7KY6	7.5	EV-2781-3	1.0	---	P4	B	10000		{8CN7	7.5	EV-7806-0	1.3	---	E	750	Triode Sect.
{7KZ6	7.5	EV-2781-3	2.0	---	P4	B	8200		{8CN7	7.5	EV-0203-0	0.0	0	P1	★	Diode No. 1
{8AC9†	7.5	B3-9XW8-7	1.0	---	P4	C	4400	Pent. Sect.	{8CN7	7.5	EV-0103-0	0.0	0	P1	★	Diode No. 2
{8AC9	7.5	B3-0304-0	0.0	18	P1	G	★	Diode No. 1	{8CS7	7.5	EV-7608-0	3.7	---	D	1400	Triode No. 1
{8AC9	7.5	B3-0203-0	0.0	18	P1	G	★	Diode No. 2	{8CS7	7.5	EV-3109-0	5.3	---	D	2840	Triode No. 2
{8AC10†	10.0	B3-9W04-0	1.0	---	P4	C	3450	Triode No. 1, Set "Power Adjust" at 85V.	{8CW5	7.5	EV-2793-0	4.0	---	C	4500	
{8AC10	10.0	B3-7506-0	1.0	---	P4	C	3450	Triode No. 2	{8CX8	7.5	EV-7986-0	2.0	---	C	4100	Pent. Sect.
{8AC10	10.0	B3-X203-0	1.0	---	P4	C	3450	Triode No. 3	{8CX8	7.5	EV-2301-0	1.2	---	D	2900	Triode Sect.
{8AL9†	7.5	B3-X2W9-4	0.5	---	P4	B	8200	Pent. Sect.	{8EB8	7.5	EV-7986-0	0.8	---	C	5000	Pent. Sect.
{8AL9	7.5	B3-5706-0	1.4	---	P4	C	4000	Triode Sect.	{8EB8	7.5	EV-2301-0	0.6	---	E	1400	Triode Sect.
{8AR11†	7.5	B3-W89X-7	0.6	---	P4	C	5600	Pent. No. 1	{8EM5	7.5	EV-3917-0	3.7	---	D	3200	
{8AR11	7.5	B3-5236-4	0.6	---	P4	C	5600	Pent. No. 2	{8ET7	7.5	EV-7986-0	2.0	---	C	5000	Pent. Sect.
{8AU8	7.5	EV-7986-0	1.0	---	P4	C	4400	Pent. Sect.	{8ET7	7.5	EV-0301-0	0.0	---	D	★	Diode No. 1
{8AU8	7.5	EV-2301-0	1.5	---	P4	C	3100	Triode Sect.	{8ET7	7.5	EV-0201-0	0.0	---	D	★	Diode No. 2
{8AV11†	7.5	B3-9W04-0	3.0	---	P4	E	1600	Triode No. 1	{8FQ7	7.5	EV-7608-0	3.7	---	D	1640	Triode No. 1
{8AV11	7.5	B3-7506-0	3.0	---	P4	E	1600	Triode No. 2	{8FQ7	7.5	EV-2103-0	3.7	---	D	1640	Triode No. 2
{8AV11	7.5	B3-X203-0	3.0	---	P4	E	1600	Triode No. 3	{8GK6	7.5	EV-2781-3	1.0	---	C	6300	
{8AW8A	7.5	EV-7986-0	2.0	---	P4	C	4700	Pent. Sect.	{8GN8	7.5	EV-7986-0	2.0	---	C	5100	Pent. Sect.
{8AW8A	7.5	EV-2301-0	1.3	---	P4	C	2500	Triode Sect.	{8GN8	7.5	EV-2301-0	1.6	---	E	800	Triode Sect.
{8B10†	7.5	B3-5607-0	4.4	---	P4	D	1700	Triode No. 1, Set "Power Adjust" at 114 Volts	{8GU7	7.5	EV-7608-0	5.2	---	D	1730	Triode No. 1
{8B10	7.5	B3-3402-0	4.4	---	P4	D	1700	Triode No. 2	{8GU7	7.5	EV-2103-0	5.2	---	D	1730	Triode No. 2
{8B10	7.5	B3-0W09-0	0.0	0	P1	G	★	Triode No. 3	{8GX7	7.5	EV-2671-0	1.0	---	C	4400	Pent. Sect.
{8B10	7.5	B3-0809-0	0.0	0	P1	G	★	Triode No. 4	{8GX7	7.5	EV-9801-0	1.4	---	C	5300	Triode Sect.
{8BA8A	7.5	EV-7986-0	1.5	---	P4	C	4400	Pent. Sect.	{8JL8	7.5	EV-7986-0	2.4	---	C	4800	Pent. Sect.
{8BA8A	7.5	EV-2301-0	5.6	---	P4	D	1700	Triode Sect.	{8JL8	7.5	EV-2301-0	2.0	---	D	2900	Triode Sect.
{8BA11†	7.5	B3-4638-7	1.0	---	P4	D	500	Pent. No. 1	{8JV8	7.5	EV-7986-0	1.2	---	C	5200	Pent. Sect.
{8BA11	7.5	B3-4238-5	1.0	---	P4	D	500	Pent. No. 2	{8JV8	7.5	EV-2301-0	1.4	---	D	2200	Triode Sect.
{8BA11	7.5	B3-9X0W-0	4.8	---	P4	D	1250	Triode Sect.	{8JU8	7.5	EV-0809-0	0.0	0	P1	★	Diode No. 1
{8BH8	7.5	EV-7986-0	0.5	---	---	C	3150	Pent. Sect. Hold down P1 and Press P4	{8JU8	7.5	EV-0708-0	0.0	0	P1	★	Diode No. 2
{8BH8	7.5	EV-2301-0	4.8	---	P4	D	2100	Triode Sect.	{8JU8	7.5	EV-0203-0	0.0	0	P1	★	Diode No. 3
{8BM11†	7.5	B3-X79W-8	1.0	---	P4	C	3800	Pent. No. 1	{8K11†	7.5	B3-9W04-8	3.2	---	D	1950	Triode No. 1
{8BM11	7.5	B3-6235-4	1.2	---	P4	C	3500	Pent. No. 2	{8K11	7.5	B3-7506-8	1.3	---	E	800	Triode No. 2
{8BN8	7.5	EV-8709-0	1.8	---	P4	D	1600	Triode Sect.	{8K11	7.5	B3-X203-8	1.3	---	E	800	Triode No. 3
{8BN8	7.5	EV-0603-0	0.0	0	P1	G	★	Diode No. 1	{8KA8	7.5	EV-6983-7	1.2	---	E	1260	Pent. Sect.
{8BN8	7.5	EV-0102-0	0.0	0	P1	G	★	Diode No. 2	{8KA8	7.5	EV-2103-0	2.4	---	E	1260	Triode Sect.
{8BN11†	10.0	B3-7X98-W	1.0	---	P4	C	3800	Pent. No. 1, Set "Power Adjust" To 85V.	{8KR8	7.5	EV-7986-0	2.0	---	C	6600	Triode Sect.
{8BN11	10.0	B3-3542-6	1.0	---	P4	C	3800	Pent. No. 2	{8KR8	7.5	EV-2301-0	1.2	---	C	5900	Pent. Sect.
{8BQ5	7.5	EV-2793-0	1.0	---	P4	C	5650		{8LC8	7.5	EV-6987-3	1.2	---	E	1260	Pent. Sect.
Tubes indicating gas: Re-test using EV-1793-0								{8LC8	7.5	EV-2103-0	2.4	---	E	1260	Triode Sect.	
{8BQ11†	7.5	B3-W89X-7	0.0	---	P4	C	6300	Pent. No. 1	{8LR8†	7.5	EV-2673-0	10.0	---	C	3500	Pent. Sect. Use Adapter SA-4, 1059-144, Note 7
{8BQ11	7.5	B3-5236-4	0.4	---	P4	C	6500	Pent. No. 2	{8LR8	7.5	EV-9801-0	3.6	---	C	650	Triode Sect.
{8BU11†	7.5	B3-8W9X-0	1.0	---	P4	D	3000	Pent. Sect.	{Model 539C: No Adapter Required.							
{8BU11	7.5	B3-6705-0	1.6	---	P4	C	4000	Triode No. 1								
{8BU11	7.5	B3-4302-0	1.6	---	P4	C	4000	Triode No. 2								

{Model 539C: No Adapter Required.

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT PRESS	MIN. MUT. COND.	NOTATIONS	
{8LT8	7.5	EV-9321-6	0.8	---	C	Pent. Sect.	{10EG7	10.0	HY-4506-0	6.0	P4	E	1200	Triode No. 1
{8LT8	7.5	EV-0607-0	0.0	19	C	Diode No. 1	{10EG7	10.0	HY-1203-0	20.0	P4	C	4700	Triode No. 2
{8LT8	7.5	EV-0807-0	0.0	19	C	Diode No. 2	{10EM7	10.0	HY-4506-0	1.6	P4	D	1000	Triode No. 1
{8MU8	7.5	EV-2637-0	2.0	---	C	Pent. Sect.	{10EM7	10.0	HY-1203-0	17.0	P4	C	6000	Triode No. 2
{8MU8	7.5	EV-9103-0	2.0	---	C	Triode Sect.	{10GF7†	10.0	EV-9801-0	2.0	P4	E	600	Triode No. 1, Use Adapter SA-4, 1059-144, Note 7
{8SN7	7.5	HY-4506-0	3.7	---	D	Triode No. 1	{10GF7	10.0	EV-2603-0	16.0	P4	C	5000	Triode No. 2
{8SN7	7.5	HY-1203-0	3.7	---	D	Triode No. 2	Model 539C: No Adapter Required.							
{8U9†	7.5	FW-3782-4	1.5	---	C	Pent. Sect. Use Adapter SA-11, 1059-177, Note 7	{10GK6	10.0	EV-2781-3	1.0	P4	C	6300	Pent. Sect.
{8U9	7.5	FW-W901-0	4.5	---	C	Triode Sect.	{10GN8	10.0	EV-7986-0	2.0	P4	C	5100	Triode Sect.
{8X9†	7.5	FW-3782-4	1.5	---	C	Pent. Sect. Use Adapter SA-11, 1059-177, Note 7	{10GN8	10.0	EV-2301-0	1.6	P4	E	800	Triode Sect.
{8X9	7.5	FW-W901-0	1.2	---	C	Triode Sect.	{10GV8	10.0	EV-9678-0	8.0	P4	C	4100	Pent. Sect.
{9AH9†	10.0	B3-5X37-9	1.2	---	C	Pent. Sect.	{10GV8	10.0	EV-2103-0	2.0	P4	D	2800	Triode Sect.
{9AH9	10.0	B3-2304-0	4.3	---	E	Triode Sect.	{10HF8	10.0	EV-7986-0	1.8	P4	C	5000	Pent. Sect.
{9AK10†	10.0	B3-5W04-0	2.0	---	D	Triode No. 1	{10HF8	10.0	EV-2301-0	1.2	P4	D	2500	Triode Sect.
{9AK10	10.0	B3-7506-0	2.0	---	D	Triode No. 2	{10J10†	10.0	B3-7468-5	0.0	P4	E	250	Pent. No. 1 Plate Volts=Low
{9AK10	10.0	B3-X203-0	2.0	---	D	Triode No. 3	{10J10	10.0	B3-X923-0	2.6	P4	C	4300	Pent. No. 2
{9AU7	10.0	EV-7608-0	3.2	---	D	Triode No. 1	{10JA5†	10.0	B3-9634-0	15.0	P4	C	3900	Tetrode Sect.
{9AU7	10.0	EV-2103-0	3.2	---	D	Triode No. 2	{10JA8	10.0	EV-7986-0	1.0	P4	C	5700	Triode Sect.
{9BJ11†	10.0	B3-X79W-8	1.0	---	D	Pent. No. 1	{10JA8	10.0	EV-2301-0	1.6	P4	D	2200	Pent. Sect. Use "Min. and Sub-Min." Shorts Position.
{9BJ11	10.0	B3-6235-4	1.0	---	C	Pent. No. 2	{10JT8	10.0	EV-7986-0	1.6	P4	C	5700	Triode Sect.
{9EA8	10.0	EV-2637-0	0.8	---	D	Pent. Sect.	{10JT8	10.0	EV-2301-0	2.6	P4	E	950	Triode Sect.
{9EA8	10.0	EV-9108-0	1.4	---	C	Triode Sect.	{10JY8	10.0	EV-7986-0	2.0	P4	C	4750	Pent. Sect.
{9GH8	10.0	EV-2637-0	1.7	---	D	Pent. Sect.	{10JY8	10.0	EV-2301-0	1.2	P4	C	6500	Triode Sect.
{9GH8	10.0	EV-9103-0	1.3	---	C	Triode Sect.	{10KR8	10.0	EV-7986-0	2.0	P4	C	6600	Pent. Sect.
{9JW8	10.0	EV-2637-0	1.6	---	D	Pent. Sect.	{10KR8	10.0	EV-2301-0	1.2	P4	C	5900	Triode Sect.
{9JW8	10.0	EV-9103-0	1.1	---	D	Triode Sect.	{10KU8	10.0	EV-7986-0	2.0	P4	B	6300	Pent. Sect.
{9KC6	7.5	EV-2791-6	1.0	---	C	Pent. Sect.	{10KU8	10.0	EV-0301-0	0.0	P1	D	★	Diode No. 1
{9KX6	7.5	EV-2781-3	1.0	---	E	Triode Sect.	{10KU8	10.0	EV-0201-0	0.0	P1	D	★	Diode No. 2
{9KZ8	10.0	EV-2673-0	1.4	---	D	Pent. Sect.	{10LB8	10.0	EV-7986-0	2.2	P4	C	5350	Pent. Sect.
{9KZ8	10.0	EV-9108-0	1.8	---	C	Triode Sect.	{10LB8	10.0	EV-2301-0	1.6	P4	C	2950	Triode Sect.
{9LA6	7.5	EV-2781-3	2.0	---	C	Pent. Sect.	{10LD6	10.0	EV-2781-3	1.6	P4	C	5500	Pent. No. 1
{9ML8	10.0	EV-6307-2	2.0	---	C	Triode No. 1	{10LE8	10.0	EV-9683-7	2.0	P4	E	800	Pent. No. 2
{9ML8	10.0	EV-8207-0	2.0	---	C	Triode No. 2	{10LE8	10.0	EV-9183-2	2.0	P4	E	800	Pent. No. 2
{9ML8	10.0	EV-9107-0	2.0	---	C	Triode No. 3	{10LW8	10.0	EV-7986-0	2.0	P4	C	6300	Pent. Sect.
{9MN8†	10.0	B3-3603-0	1.0	---	C	Triode No. 1	{10LW8	10.0	EV-2301-0	3.0	P4	E	750	Triode Sect.
{9MN8	10.0	B3-W403-0	1.0	---	C	Triode No. 2	{10LY8	10.0	EV-7986-0	2.9	P4	C	4800	Pent. Sect.
{9MN8	10.0	B3-X203-0	1.0	---	C	Triode No. 3	{10LY8	10.0	EV-2301-0	1.4	P4	E	875	Triode Sect.
{9R-AL1	10.0	EV-7608-0	6.4	---	C	Triode No. 1	{10LZ8	10.0	EV-7986-0	2.0	P4	C	4100	Pent. Sect.
{9R-AL1	10.0	EV-3109-0	6.0	---	C	Triode No. 2	{10LZ8	10.0	EV-2301-0	3.0	P4	E	315	Triode Sect.
{9V9†	10.0	FW-3741-2	1.0	---	E	Pent. Sect. Hold Down P1 and Press P4, Use Adapter SA-11, 1059-177, Note 7	{10T10†	10.0	B3-3XW9-0	2.2	P4	C	3200	Pent. No. 1
{9V9	10.0	FW-8W09-0	2.4	---	C	Triode Sect.	{10T10	10.0	B3-3762-5	1.6	P4	C	375	Pent. No. 2
{10AL11†	10.0	B3-8XW9-0	2.4	---	C	Pent. No. 1	{10Z10†	10.0	B3-7468-5	0.0	P4	E	250	Pent. No. 1 Plate Volts=Low
{10AL11	10.0	B3-3672-4	3.4	---	E	Pent. No. 2	{10Z10	10.0	B3-X923-0	2.6	P4	C	4300	Pent. No. 2
{10BQ5	10.0	EV-2793-0	1.0	---	C	Tubes indicating Bar: Re-test using EV-1783-9	{11AF9†	12.6	FW-8W97-0	2.2	P4	C	6300	Pent. No. 1, Use Adapter SA-11, 1059-177, Note 7
{10CW5	10.0	EV-2793-0	4.0	---	C	Triode No. 1	{11AF9	12.6	FW-1432-0	1.0	P4	C	5300	Pent. No. 2
{10DE7	10.0	EV-7608-0	5.0	---	E	Triode No. 2	{11AR11†	12.6	B3-W99X-7	0.6	P4	C	5300	Pent. No. 1, Set "Power Adjust" at 9V
{10DE7	10.0	EV-2109-0	19.0	---	C	Triode No. 1	{11AR11	12.6	B3-5236-4	0.6	P4	C	5300	Pent. No. 2
{10DR7	10.0	EV-7608-0	1.3	---	D	Triode No. 1	{11BQ11†	12.6	B3-W99X-7	0.6	P4	C	4400	Pent. No. 1, Keep "Power Adjust" at 9V
{10DR7	10.0	EV-2109-0	18.0	---	C	Triode No. 2	{11BQ11	12.6	B3-5236-4	0.6	P4	C	5000	Pent. No. 2

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT PRESS	MIN. MUT. COND.	NOTATIONS
{11BT11†	10.0	B3-X2W3-6	1.0	---	B	Pent. Sect.	{12AV6	12.6	ET-1702-5	1.3	---	E	800
{11BT11	10.0	B3-5706-0	0.8	---	D	Triode No. 1	{12AV6	12.6	ET-1602-5	0.0	---	D	★
{11BT11	10.0	B3-3904-0	2.0	---	D	Triode No. 2	{12AV6	12.6	ET-1502-7	0.0	---	D	★
{11CA11†	10.0	B3-8XW9-7	2.5	---	C	Pent. Sect.	{12AV7	12.6	EV-7608-2	1.2	---	C	5350
{11CA11	10.0	B3-6405-0	2.0	---	D	Triode No. 1	{12AV7	12.6	EV-2103-7	1.2	---	C	5350
{11CA11	10.0	B3-3207-0	2.0	---	D	Triode No. 2	{12AX3†	12.6	B3-0407-0	0.0	89	G	★
{11CF11†	10.0	B3-5346-0	0.4	---	B	Pent. Sect.	{12AX7	12.6	EV-7608-0	1.3	---	D	875
{11CF11	10.0	B3-9W08-0	1.4	---	C	Triode No. 1	{12AX7	12.6	EV-2103-0	1.3	---	D	875
{11CF11	10.0	B3-X207-0	1.1	---	C	Triode No. 2	{12AY3†	12.6	EV-0209-0	0.0	87	G	★
{11CY7	10.0	EV-7608-0	1.5	---	D	Triode No. 1	{Model 539C: No Adapter Required.}						
{11CY7	10.0	EV-2109-0	20.0	---	C	Triode No. 2	{12AY7	12.6	EV-7608-0	2.0	---	D	1100
{11DS5	12.6	ET-1562-0	2.0	---	C	Triode No. 1	{12AY7	12.6	EV-2103-0	2.0	---	D	1100
{11FY7†	10.0	B3-WX09-0	1.7	---	D	Triode No. 2	{12AZ7	12.6	EV-7608-0	1.6	---	D	2500
{11FY7	10.0	B3-3507-0	12.5	---	C	Triode No. 1	{12AZ7	12.6	EV-2103-0	1.6	---	D	2500
{11HM7	10.0	EV-2781-9	1.0	---	P	Pent. Sect.	12B4	12.6	EV-2901-0	15.0	---	C	6000
{11JE8	10.0	EV-7986-0	1.2	---	C	Pent. Sect.	12BA6	12.6	ET-1567-2	1.0	---	D	2070
{11JE8	10.0	EV-2301-0	2.4	---	E	Triode Sect.	{12BA7	12.6	EV-7913-2	0.0	---	D	1070
{11KV8	10.0	EV-7986-0	1.5	---	B	Pent. Sect.	{12BA7	12.6	EV-2103-7	0.0	---	C	5000
{11KV8	10.0	EV-2301-0	1.0	---	D	Triode Sect.	12BD6	12.6	ET-1567-2	3.0	---	D	1260
{11LQ8	10.0	EV-7986-0	1.5	---	B	Pent. Sect.	12BE3†	12.6	B3-0W07-0	0.0	91	G	★
{11LQ8	10.0	EV-2301-0	1.2	---	C	Triode Sect.	{12BE5	12.6	ET-7562-1	0.0	---	D	940
{11LT8	12.6	EV-9321-6	0.4	---	C	Pent. Sect.	{12BE6	12.6	ET-1602-7	2.0	---	C	4500
{11LT8	12.6	EV-0607-0	0.0	0	G	Diode No. 1	{12BF6	12.6	ET-1702-0	3.0	---	E	1200
{11LT8	12.6	EV-0807-0	0.0	0	G	Diode No. 2	{12BF6	12.6	ET-1602-0	0.0	---	D	★
{11LY6	10.0	EV-2781-3	1.0	---	C	Pent. Sect.	{12BF6	12.6	ET-1502-0	0.0	---	D	★
{11MS8	12.6	EV-9678-0	18.0	---	D	Pent. Sect.	{12BF11†	12.6	B3-8XW9-0	6.4	---	C	3900
{11MS8	12.6	EV-2103-0	1.0	---	C	Triode Sect.	{12BF11	12.6	B3-3762-5	2.2	---	E	375
{11Y9†	10.0	FW-8W97-0	2.2	---	C	Pent. Sect.	{12BH7	12.6	EV-7608-2	5.2	---	D	1950
{11Y9	10.0	FW-1432-0	1.0	---	C	Pent. No. 1. Use Adapter SA-11, 1050-144. Note 7	{12BH7	12.6	EV-2103-7	5.2	---	D	1950
{12AC10†	12.6	B3-9W04-0	1.0	---	C	Triode No. 2	{12BN6	12.6	ET-2751-6	0.0	---	E	250
{12AC10	12.6	B3-7506-0	1.0	---	C	Triode No. 1	{12BN6	12.6	ET-6751-2	0.4	---	D	570
{12AC10	12.6	B3-X203-0	1.0	---	C	Triode No. 3	12BQ6	12.6	HS-5048-0	12.0	---	C	3500
{12AE10†	12.6	B3-8XW9-0	5.8	---	D	Pent. No. 1	{12BS3†	12.6	EV-0209-0	0.0	85	G	★
{12AE10	12.6	B3-3762-5	3.0	---	E	Pent. No. 2	{Model 539C: No Adapter Required.}						
12AF3	12.6	EV-0002-0	0.0	88	G	Cap-P. Reverse Meter Short on D.	12BT3†	12.6	B3-0407-0	0.0	90	G	★
{12AL5	12.6	ET-0701-6	0.0	0	P	Diode No. 1	{12BV11†	12.6	B3-7W98-X	2.0	---	D	1600
{12AL5	12.6	ET-0205-6	0.0	0	P	Diode No. 2	{12BV11	12.6	B3-6345-2	2.0	---	D	1600
{12AL11†	12.6	B3-8XW9-0	2.4	---	C	Pent. No. 1	12BY3	12.6	EV-0002-0	0.0	90	G	★
{12AL11	12.6	B3-3672-4	3.4	---	E	Pent. No. 2	12BY7	12.6	EV-2781-3	1.0	---	C	5700
12AO5	12.6	ET-1562-0	2.1	---	D	Triode Sect.	12BZ6	12.6	ET-1562-7	1.2	---	C	3850
{12AT6	12.6	ET-1702-0	1.5	---	E	Diode No. 1	12C5	12.6	ET-2761-0	1.5	---	C	5650
{12AT6	12.6	ET-1602-0	0.0	---	P	Diode No. 2	12CA5	12.6	DU-2761-0	0.0	---	C	5300
{12AT6	12.6	ET-1502-0	0.0	---	P	Triode No. 1	{12CK3†	12.6	EV-0209-0	0.0	91	G	★
{12AT7	12.6	EV-7608-0	1.6	---	D	Triode No. 2	{Model 539C: No Adapter Required.}						
{12AT7	12.6	EV-2103-0	1.6	---	D	Triode No. 1	{12CL3†	12.6	EV-0209-0	0.0	91	G	★
12AU6	12.6	ET-1567-2	1.0	---	C	Triode No. 2	{Model 539C: No Adapter Required.}						
{12AU7	12.6	EV-7608-0	3.2	---	D	Triode No. 1	{12CR6	12.6	ET-7561-2	2.4	---	D	1400
{12AU7	12.6	EV-2103-0	3.2	---	D	Hold Down P1 and Press P4	{12CR6	12.6	ET-0201-0	0.0	---	D	★
12AV5	12.6	HS-1583-0	6.5	---	C	Pent. Sect.							Diode Sect.

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	
{12CS6	12.6	ET-1562-7	0.0	---	P4	D	Grid No. 1 Plate Volts=Low	{12JN8	12.6	EV-9678-0	1.0	---	P4	D	3200	Pent. Sect.
{12CS6	12.6	ET-7562-1	0.0	---	P4	D	Grid No. 3 Plate Volts=Low	{12JN8	12.6	EV-1203-0	1.8	---	P4	D	3800	Triode Sect.
12CT3	12.6	EV-0209-0	0.0	90	P3	G	★	{12JQ6	12.6	EV-7139-6	25.0	---	P4	D	2900	Pent. Sect.
12CU5	12.6	ET-2761-0	1.0	---	---	C	Hold down P1 and Press P4	{12JQ6	12.6	EV-0609-0	0.0	0	P1	G	★	Diode Sect.
12CU6	12.6	HS-5048-0	12.0	---	P4	C	Cap=P	{12JQ6†	12.6	B3-5032-4	25.0	---	P4	C	3150	Cap=P
12D4	12.6	HY-0503-0	0.0	86	P3	G	★	{12JT6†	12.6	EV-2973-6	22.0	---	P4	C	4100	Use Adapter SA-4, 1050-144, Note 7
12DB5	12.6	EV-3912-0	1.5	---	---	C	Hold down P1 and Press	{Model 539C†	12.6	EV-2973-6	22.0	---	---	---	---	---
{12DJ8	12.6	EV-7608-0	3.0	---	P4	C	Triode No. 1	{12K8	12.6	HS-5348-6	1.1	---	P4	D	630	Hex. Sect. Cap=G
{12DJ8	12.6	EV-2103-0	3.0	---	P4	C	Triode No. 2	{12K8	12.6	HS-5608-4	2.0	---	P4	D	1900	Triode Sect.
12DM4	12.6	HY-0503-0	0.0	87	P3	G	★	{12MD8†	12.6	EV-6307-0	4.0	---	P4	D	2300	Triode No. 1, Use Adapter SA-4, 1050-144, Note 7
12DM5	12.6	ET-2761-0	1.5	---	---	C	Hold down P1 and Press P4	{12MD8	12.6	EV-8207-0	4.0	---	P4	D	2300	Triode No. 2
12DQ6	12.6	HS-5048-0	0.0	---	P4	C	Cap=P	{12MD8	12.6	EV-9107-0	4.0	---	P4	D	2300	Triode No. 3
12DT5	12.6	EV-3917-0	4.4	---	P4	C	Plate Volts=Low	{Model 539C†	12.6	EV-9107-0	4.0	---	---	---	---	---
{12DT6	12.6	ET-1562-7	3.4	---	P4	E	Grid No. 1	{12MN8†	12.6	B3-8603-0	1.0	---	P4	C	1200	Triode No. 1
{12DT6	12.6	ET-7562-1	1.8	---	---	E	Grid No. 3, Hold down P1 and Press P4	{12MN8	12.6	B3-W403-0	1.0	---	P4	C	1200	Triode No. 2
{12DT7	12.6	EV-7608-0	1.3	---	P4	D	Triode No. 1	{12MN8	12.6	B3-X203-0	1.0	---	P4	C	1200	Triode No. 3
{12DT7	12.6	EV-2103-0	1.3	---	P4	D	Triode No. 2	{12R-LL5	12.6	EV-7608-0	3.7	---	P4	D	1640	Triode No. 1
{12DT8	12.6	EV-7608-9	1.6	---	P4	D	Triode No. 1	{12R-LL5	12.6	EV-2103-0	3.7	---	P4	D	1640	Triode No. 2
{12DT8	12.6	EV-2103-9	1.6	---	P4	D	Triode No. 2	{12SN7	12.6	HY-4506-2	3.7	---	P4	D	1640	Triode No. 1
{12DW4†	12.6	EV-0209-0	0.0	82	P3	G	★	{12SN7	12.6	HY-1203-5	3.7	---	P4	D	1640	Triode No. 2
{Model 539C†	12.6	EV-0209-0	0.0	82	---	---	Use Adapter SA-4, 1050-144, Note 7	{12T10†	12.6	B3-8XW9-0	2.2	---	P4	C	3800	Pent. No. 1
{Model 539C†	12.6	EV-7608-0	1.3	---	P4	D	Triode No. 1	{12T10†	12.6	B3-3762-5	1.6	---	P4	E	375	Pent. No. 2
{12DW7	12.6	EV-2103-0	4.8	---	P4	D	Triode No. 2	12V6	12.6	HS-5348-0	3.3	---	P4	D	2600	---
12DZ6	12.6	ET-2657-1	0.0	---	P1	B	★	12W6	12.6	HS-5348-0	1.5	---	---	C	5650	Hold Down P1 and Press P4
{12FQ8	12.6	EV-7809-0	0.8	---	P4	E	Make no gas test	{12X4	12.6	ET-0607-1	0.0	85	P3	G	★	Plate No. 1
{12FQ8	12.6	EV-7609-0	0.8	---	P4	E	Triode No. 1 Plate No. 1	{12X4	12.6	ET-0107-6	0.0	85	P3	G	★	Plate No. 2
{12FQ8	12.6	EV-2309-0	0.8	---	P4	E	Triode No. 2 Plate No. 1	{13CW4†	12.6	DR-4208-0	0.5	---	P4	C	5000	Plate=Low, Use Adapter SA-3, 1050-144, Note 7
{12FQ8	12.6	EV-2109-0	0.8	---	P4	E	Triode No. 2 Plate No. 2	{Model 539C†	12.6	DR-4208-0	0.5	---	---	---	---	---
12FX5	12.6	ET-2761-0	3.0	---	P4	C	Triode No. 2 Plate No. 2	{13CW4	12.6	13-4208-0	0.5	---	P4	C	5000	Plate Volts=Low
{12G11†	12.6	B3-8XW9-0	1.8	---	P4	D	Pent. No. 1	{13DE7	12.6	EV-7608-0	5.0	---	P4	E	1260	Triode No. 1
{12G11	12.6	B3-3672-4	3.0	---	P4	E	Pent. No. 2	{13DE7	12.6	EV-2109-0	19.0	---	P4	C	3800	Triode No. 2
12GC6	12.6	HS-5083-0	15.0	---	P4	C	Cap=P	{13DR7	12.6	EV-7608-0	1.3	---	P4	D	1000	Triode No. 1
12GE5†	12.6	B3-X72W-0	15.0	---	P4	C	Cap=P	{13DR7	12.6	EV-2109-0	18.0	---	P4	C	4100	Triode No. 2
{12GJ5†	12.6	EV-6073-0	5.3	---	---	C	Cap=P, Hold Down P1 and Press P4, Use Adapter SA-4, 1050-144, Note 7	{13EM7	12.6	HY-4506-0	1.6	---	P4	D	1000	Triode No. 1
{Model 539C†	12.6	EV-6073-0	5.3	---	---	---	Cap=P, Hold Down P1 and Press P4, Use Adapter SA-4, 1050-144, Note 7	{13EM7	12.6	HY-1203-0	17.0	---	P4	C	6000	Triode No. 2
12GN7	12.6	EV-2781-9	0.6	---	P4	B	11500	{13FD7	12.6	EV-7608-0	0.8	---	P4	E	1000	Triode No. 1
{12GT5†	12.6	EV-6973-0	5.3	---	---	C	4400	{13FD7	12.6	EV-2109-0	17.0	---	P4	C	4700	Triode No. 2
{Model 539C†	12.6	EV-6973-0	5.3	---	---	---	Cap=P	{13FM7†	12.6	B3-WX09-0	2.6	---	P4	E	600	Triode No. 1
12GV5†	12.6	B3-90XW-0	14.0	---	P4	C	Cap=P	{13FM7	12.6	B3-8507-0	16.0	---	P4	C	4500	Triode No. 2
12GW6	12.6	HS-5048-0	0.0	---	P4	C	Cap=P, Plate Volts=Low	{13GF7†	12.6	EV-9801-0	2.0	---	P4	E	600	Triode No. 1, Use Adapter SA-4, 1050-144, Note 7
12H-B25	12.6	EV-2079-8	12.0	---	P4	C	Cap=P, Plate Volts=Low	{13GF7	12.6	EV-2603-0	16.0	---	P4	C	5000	Triode No. 2
{12HE7†	12.6	B3-95X8-0	15.0	---	P4	C	Use Adapter SA-4, 1050-144, Note 7	{Model 539C†	12.6	EV-2603-0	16.0	---	---	---	---	---
{12HE7	12.6	B3-0204-0	0.0	89	P3	G	★	{13J10†	12.6	B3-7468-5	0.0	---	P4	E	250	Pent. No. 1, Plate Volts=Low
12HG7	12.6	EV-2781-3	1.0	---	P4	B	10000	{13J10	12.6	B3-X923-0	2.6	---	P4	C	4300	Pent. No. 2
12HL5	12.6	EV-2793-0	3.0	---	P4	C	6000	{13JZ8†	12.6	B3-7489-0	7.6	---	P4	C	4050	Pent. Sect.
12HL7	12.6	EV-2781-3	2.3	---	P4	C	4500	{13JZ8	12.6	B3-W20X-0	5.0	---	P4	E	1150	Triode Sect.
{12JB6†	12.6	EV-2013-9	5.3	---	---	C	4400	{13V10†	12.6	B3-8XW9-0	3.4	---	P4	C	3100	Pent. No. 1 Plate Volts=Low
{Model 539C†	12.6	EV-2013-9	5.3	---	---	---	Cap=P, Hold Down P1 and Press P4, Use Adapter SA-4, 1050-144, Note 7	{13V10	12.6	B3-3762-5	2.8	---	P4	E	450	Pent. No. 2
12JF5†	12.6	B3-3024-0	0.0	---	P4	C	5000	{13Z10†	12.6	B3-7468-5	0.0	---	P4	E	250	Pent. No. 1, Plate Volts=Low
12JN6†	12.6	B3-X732-4	12.0	---	P4	C	4100	{13Z10	12.6	B3-X923-0	2.6	---	P4	C	4300	Pent. No. 2

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS
{14BL11†	12.6	B3-X2W8-0	1.4	---	P4	C	Pent. Sect.	16JVB†	20.0	B3-X732-W	15.0	---	P4	C	4700 Set "Power Adjust" at 84V.
14BL11	12.6	B3-5706-0	0.6	---	P4	C	Triode No. 1	16KA6†	20.0	B3-503W-A	17.0	---	P4	C	4100 Cap-P. Keep "Power Adjust" at 84V.
14BL11	12.6	B3-3904-0	2.0	---	P4	C	Triode No. 2	{16LU8†	20.0	B3-6489-0	10.0	---	P4	C	3500 Pent. Sect.
14BR11†	12.6	B3-2X34-0	0.5	---	P4	C	Pent. Sect.	{16LU8	20.0	B3-W20X-0	3.6	---	P4	E	650 Set "Power Adjust" to 84V
14BR11	12.6	B3-8605-0	1.0	---	P4	C	Triode No. 1	{16MY8†	20.0	B3-6489-0	10.0	---	P4	C	3500 Triode Sect.
14BR11	12.6	B3-W907-0	1.0	---	P4	C	Triode No. 2	{16MY8	10.0	B3-W20X-0	3.6	---	P4	E	650 Set "Power Adjust" to 84V.
14GT8	12.6	EV-8907-0	0.5	---	P1	E	500 Triode Sect	{16Y9†	20.0	FW-8W97-0	1.4	---	P4	C	6300 Pent. No. 1. Set "Power Adjust" at 84V. Use Adapter SA-11, 1050-177. Note 7
14GT8	12.6	EV-0601-0	0.0	0	P1	G	★ Diode No.	{16Y9	20.0	FW-1432-0	0.5	---	P4	C	5300 Pent. No. 2. Set "Power Adjust" at 80V
14GT8	12.6	EV-0203-0	0.0	0	P1	G	★ Diode No.	{17AB9†	20.0	FW-978W-0	1.5	---	P4	C	3500 Tetrode No. 1. Set "Power Adjust" at 85V. Use Adapter SA-11, 1050-177. Note 7
14JG8	12.6	EV-8907-0	1.0	---	P4	E	950 Triode Sect.	{17AB9	20.0	FW-3124-0	1.5	---	P4	C	3500 Tetrode No. 2. Set "Power Adjust" at 85V.
14JG8	12.6	EV-0601-0	0.0	0	P1	G	★ Diode No. 1	{17AB10†	20.0	B3-7468-5	0.0	---	P4	E	250 Limiter Grid. Plate Volts=Low To Test Position
14JG8	12.6	EV-0203-0	0.0	0	P1	G	★ Diode No. 2	{17AB10	20.0	B3-5468-7	0.8	---	P4	D	575 Quadrature Grid. Plate Volts=Low
{15AF11†	12.6	B3-X2W9-0	2.0	---	P4	C	5600 Pent. Sect. Set "Power Adjust" to 118 Volts	17AB10	20.0	B3-X923-0	8.0	---	P4	C	3100 Pent. No. 2. Plate Volts=Normal
15AF11	12.6	B3-6805-0	1.2	---	P4	C	4400 Triode No. 1	17AX3†	20.0	B3-0407-0	0.0	88	P3	G	★ Set "Power Adjust" to 80 Volts
15AF11	12.6	B3-3407-0	1.5	---	P4	D	3100 Triode No. 2	17AX4	20.0	JX-0503-0	0.0	84	P3	G	★ Set "Power Adjust" at 80V.
{15BD11†	12.6	B3-X2W9-0	2.8	---	P4	C	7000 Pent. Sect. Set "Power Adjust" at 112 Volts	{17AY3†	20.0	EV-0209-0	0.0	84	P3	G	★ Set "Power Adjust" at 84V. Use Adapter SA-4, 1050-144. Note 7
15BD11	12.6	B3-6805-0	1.1	---	P4	C	3500 Triode No. 1	{Model 539C	No Adapter Required.						
15BD11	12.6	B3-3407-0	2.0	---	P4	D	3000 Triode No. 2	17BE3†	20.0	B3-0W07-0	0.0	91	P3	G	★ Set "Power Adjust" to 80 Volts
15CW5	12.6	EV-2793-0	8.0	---	P4	C	6300 Triode No. 2	{17BF11†	20.0	B3-8XW9-0	4.8	---	P4	C	3900 Pent. No. 1. Set "Power Adjust" to 90 Volts
{15EW7	12.6	EV-7608-0	6.4	---	P4	E	1100 Triode No. 1. Keep "Power Adjust" at 112V.	17BF11	20.0	B3-3762-5	1.2	---	P4	E	375 Pent. No. 2
15EW7	12.6	EV-2109-0	17.5	---	P4	C	6300 Triode No. 2	{17BH3†	20.0	EV-0209-0	0.0	84	P3	G	★ Set "Power Adjust" at 84V. Use Adapter SA-4, 1050-144. Note 7
15FM7†	12.6	B3-WX09-0	2.6	---	P4	E	600 Triode No. 1	{Model 539C	No Adapter Required.						
15FM7	12.6	B3-8507-0	16.0	---	P4	C	4500 Triode No. 2	17BQ6	20.0	HS-5048-0	18.0	---	P4	D	2500 Keep Power Adjusted at 80V. Cap-P.
{15FY7†	12.6	B3-WX09-0	2.8	---	P4	E	440 Triode No. 1. Set "Power Adjust" to 118 Volts	{17BS3†	20.0	EV-0209-0	0.0	80	P3	G	★ Set "Power Adjust" at 84V. Use Adapter SA-4, 1050-144. Note 7
15FY7	12.6	B3-3507-0	30.0	---	P4	C	6700 Triode No. 2	{Model 539C	No Adapter Required.						
15HA6	12.6	EV-2761-3	1.2	---	P4	C	7500 Set "Power Adjust" to 110V.	17BW3†	20.0	B3-0407-0	0.0	87	P3	G	★ Set "Power Adjust" at 84V
15HB6	12.6	EV-2781-9	1.0	---	P4	B	10000 Keep Power Adjusted at 112V.	17BZ3†	20.0	B3-0W07-0	0.0	17	P1	G	★ Keep "Power Adjust" at 84V
{15KY8†	20.0	EV-2673-0	3.6	---	P4	D	2500 Pent. Sect. Set "Power Adjust" at 112V. Use Adapter SA-4, 1050-144. Note 7	17C5	20.0	ET-2761-0	1.5	---	C	3800 Keep power adjusted at 80V. Hold down P1. Press P4.	
15KY8	20.0	EV-9801-0	0.2	---	P4	E	570 Triode Sect.	{17C9†	20.0	EV-7986-0	1.2	---	P4	D	2500 Tetrode No. 1. Set Power Adjust to 80 Volts.
{Model 539C	No Adapter Required.							{17C9	20.0	EV-132W-0	1.2	---	P4	D	2500 Tetrode No. 2
15LE8	12.6	EV-9683-7	1.0	---	P4	E	750 Pent. No. 1. Set "Power Adjust" at 114V	{17CK3†	20.0	EV-0209-0	0.0	90	P3	G	★ Set "Power Adjust" at 80V. Use Adapter SA-4, 1050-144. Note 7
15LE8	12.6	EV-9183-2	1.0	---	P4	E	750 Pent. No. 2	{Model 539C	No Adapter Required.						
{15MF8†	12.6	B3-7489-0	4.0	---	P4	C	3100 Pent. Sect.	{17CL3†	20.0	EV-0209-0	0.0	90	P3	G	★ Set "Power Adjust" at 80V. Use Adapter SA-4, 1050-144. Note 7
15MF8	12.6	B3-W20X-0	2.4	---	P4	D	3700 Triode Sect.	{Model 539C	No Adapter Required.						
15MX8†	20.0	EV-2673-0	3.6	---	P4	D	2500 Pent. Sect. Set "Power Adjust" at 115V. Use Adapter SA-4, 1050-144. Note 7	{17CL3†	20.0	EV-0209-0	0.0	90	P3	G	★ Set "Power Adjust" at 80V. Use Adapter SA-4, 1050-144. Note 7
15MX8	20.0	EV-9801-0	0.2	---	P4	E	750 Triode Sect.	{Model 539C	No Adapter Required.						
{Model 539C	No Adapter Required.							17CT3	20.0	EV-0209-0	0.0	92	P3	G	★ Set "Power Adjust" at 80V.
16AK9†	20.0	B3-8597-0	3.3	---	P4	D	3250 Pent. Sect.	17CU5	20.0	ET-2761-0	7.6	---	P4	D	2700 Set "Power Adjust" at 80V.
16AK9	20.0	B3-WX07-0	1.1	---	P4	D	2500 Triode No. 1	17D4	20.0	HY-0503-0	0.0	86	P3	G	★ Keep power adjusted at 80V.
16AK9	20.0	B3-3207-0	3.2	---	P4	E	1300 Triode No. 2	17DE4	20.0	HY-0503-0	0.0	87	P3	G	★ Keep power adjusted at 80V.
{16BQ11†	20.0	B3-W89X-7	0.6	---	P4	C	4400 Pent. No. 1	17DM4	20.0	HY-0503-0	0.0	87	P3	G	★ Keep power adjusted at 80V.
16BQ11	20.0	B3-5236-4	0.6	---	P4	C	5000 Pent. No. 2	{17DW4†	20.0	EV-0209-0	0.0	90	P3	G	★ Set "Power Adjust" at 80V. Use Adapter SA-4, 1050-144. Note 7
{16BX11†	20.0	B3-2X3W-0	0.6	---	P4	C	4300 Pent. Sect.	{Model 539C	No Adapter Required.						
16BX11	20.0	B3-8709-0	0.6	---	P4	C	3900 Triode No. 1	17DQ6	20.0	HS-5048-0	5.0	---	P4	C	2500 Cap-P. Keep power adjusted at 80 V.
16BX11	20.0	B3-5604-0	0.7	---	P4	C	4300 Triode No. 2	17GE5†	20.0	B3-X72W-0	2.0	---	---	C	4700 Set "Power Adjust" at 80 Volts
16GK6	12.6	EV-2781-3	1.0	---	P4	C	6000 Set "Power Adjust" at 115 Volts	{17GJ5†	20.0	EV-6073-0	5.3	---	---	C	4400 Cap-P. Hold Down P1 and Press P4
16GY5†	20.0	B3-90XW-0	10.0	---	P4	C	5100 Cap-P. Set "Power Adjust" at 80V.	{Model 539C	No Adapter Required.						
16HB5†	20.0	B3-X72W-0	3.2	---	P4	C	4250 Set "Power Adjust" at 84V.								

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS		
{17GT5†	20.0	EV-6973-0	5.3	---	---	C	4400	Hold Down P1 and Press P4 Set "Power Adjust" at 84V. Use Adapter SA-4, 1050-144. Note 7	19DE3†	20.0	B3-0004-0	0.0	90	G	★	Cap-P. Reverse Meter	
{Model 539C: No Adapter Required.									19DK3†	20.0	EV-0002-0	0.0	90	G	★	Cap-P. Reverse Meter	
17GV5†	20.0	B3-90XW-0	14.0	---	---	C	4600	Cap-P. Set "Power Adjust" at 85 Volts Hold down P1 and Press P4	19DQ3†	20.0	B3-0407-0	0.0	90	G	★	Cap = P	
17GW6	20.0	HS-5048-0	5.0	---	P4	C	2500	Cap-P. Keep power adjusted at 80V.	{19EA8	20.0	EV-2637-0	1.1	---	P4	D	3100	Pent. Sect.
17H3	20.0	EV-0301-0	0.0	82	P3	G	★	Keep Power adjusted at 84V.	{19EA8	20.0	EV-9108-0	0.8	---	P4	C	5250	Triode Sect.
17H-B25	20.0	EV-2079-8	12.0	---	P4	C	4100	Cap-P. Use Adapter SA-8, 1050-168	{19EZ8	20.0	EV-9800-0	1.2	---	P4	D	1950	Triode No. 1
{17JB6†	20.0	EV-2013-8	5.3	---	---	C	4400	Cap-P. Hold Down P1 and Press P4 Set "Power Adjust" to 50V	{19EZ8	20.0	EV-7600-0	1.2	---	P4	D	1950	Triode No. 2
{Model 539C: No Adapter Required.								Cap-P. Hold Down P1 and Press P4 Set "Power Adjust" at 94V. Use Adapter SA-4, 1050-144. Note 7	19FX5	20.0	EV-2301-0	1.6	---	P4	C	2050	Triode No. 3
{17JF6†	20.0	EV-2073-8	6.0	---	---	C	5900	Cap-P. Hold Down P1 and Press P4 Set "Power Adjust" at 84V	{19GQ7	20.0	ET-2761-0	3.0	---	P4	C	4900	
{Model 539C: No Adapter Required.								Use Adapter SA-4, 1050-144. Note 7	{19GQ7	20.0	EV-0809-0	0.0	0	P1	G	★	Diode No. 1
{17JG6A†	20.0	EV-2973-6	6.0	---	---	C	5900	Hold Down P1 and Press P4 Set "Power Adjust" at 84V	{19GQ7	20.0	EV-0607-0	0.0	0	P1	G	★	Diode No. 2
{Model 539C: No Adapter Required.								Set "Power Adjust" at 84V. Use Adapter SA-4, 1050-144. Note 7	19HR6	20.0	ET-1567-2	1.4	---	P4	C	3200	Diode No. 3
17JM6†	20.0	B3-5032-W	12.0	---	P4	C	4100	Cap-P. Set "Cath. Act"	19HS6	20.0	ET-1567-2	1.8	---	P4	C	3300	Pent. Sect.
17JN6†	20.0	B3-X732-4	12.0	---	P4	C	4100	Switch to Test Pos. Set Cath. Act. Switch to Test Pos.	{19HV8	20.0	EV-9678-0	0.9	---	P4	C	3500	Triode Sect.
{17JO6	20.0	EV-7139-6	25.0	---	P4	D	2900	Set "Power Adjust" to 84V.	{19HV8	20.0	EV-1203-0	1.0	---	P4	D	3200	Pent. Sect.
{17JO6	20.0	EV-0609-0	0.0	0	P1	G	★	Set "Power Adjust" to 84V.	{19JN8	20.0	EV-9678-0	1.0	---	P4	D	3800	Triode Sect.
{17JR6†	20.0	EV-2913-6	21.5	---	P4	D	2800	Set "Cath. Act." Switch to Test Pos. Use Adapter SA-4, 1050-144. Note 7	{19JN8	20.0	EV-1203-0	1.8	---	P4	C	3150	Pent. Sect.
{Model 539C: No Adapter Required.								Set "Cath. Act." Switch to Test Pos. Use Adapter SA-4, 1050-144. Note 7	{19KG8	20.0	EV-9678-0	1.0	---	P4	C	4400	Triode Sect.
{17JT6†	20.0	EV-2973-6	22.0	---	P4	C	4100	Pent. Sect. Set "Power Adjust" at 84V.	{19M-R9	20.0	ET-2103-0	1.6	---	P4	C	1100	Pent. Sect.
{Model 539C: No Adapter Required.								Set "Power Adjust" to 84V. Use Adapter SA-4, 1050-144. Note 7	{19Q9†	20.0	EV-132W-6	1.4	---	P4	C	2850	Triode Sect.
17JZ8†	20.0	B3-7489-0	7.4	---	P4	C	2750	Pent. Sect. Set "Power Adjust" at 84V.	{19Q9	20.0	EV-8907-6	1.4	---	P4	C	4400	Pent. Sect.
17JZ8	20.0	B3-W20X-0	4.8	---	P4	E	725	Triode Sect.	{19X8	20.0	EV-7986-1	1.2	---	P4	C	2900	Pent. Sect.
{17KV6†	20.0	EV-2913-6	23.0	---	P4	D	2850	Set "Power Adjust" at 94V. Use Adapter SA-4, 1050-144. Note 7	{19X8	20.0	EV-2306-1	2.0	---	P4	C	3650	Triode Sect.
{Model 539C: No Adapter Required.								Pent. Sect. Set "Power Adjust" to 84V. Use Adapter SA-4, 1050-144. Note 7	20AO3	20.0	EV-0009-0	0.0	89	P3	G	★	Cap-P. Reverse Meter
17LD8†	20.0	EV-2673-0	7.5	---	P4	D	2500	Set "Power Adjust" at 84V.	{20EW7	20.0	EV-7608-0	5.4	---	P4	E	1200	Triode No. 1
{17LD8	20.0	EV-9801-0	4.4	---	P4	E	800	Triode Sect.	{20EW7	20.0	EV-2109-0	17.0	---	P4	C	5000	Triode No. 2
{Model 539C: No Adapter Required.								Set "Power Adjust" at 84V. Use Adapter SA-4, 1050-144. Note 7	{20EZ7	20.0	CR-8709-0	1.3	---	P4	D	875	Triode No. 1
17X10†	20.0	B3-7468-5	0.0	---	P4	E	250	Limiting Grid. Plate Volts-Low Set "Cath. Act." Switch to Test Position	{20EZ7	20.0	CR-5604-0	1.3	---	P4	D	875	Triode No. 2
17X10	20.0	B3-5468-7	0.8	---	P4	D	575	Quadrature Grid. Plate Volts-Low	20LF6†	20.0	B3-5032-4	23.0	---	P4	C	5200	Cap = P
17X10	20.0	B3-X923-0	8.0	---	P4	C	3100	Pent. No. 2 Plate Volts-Normal	21GY5†	20.0	B3-507W-0	17.0	---	P4	C	4800	Cap = P
18A5	20.0	HS-1583-0	13.0	---	P4	D	3000	Set Cath. Act. sw. to Test pos.	21HB5†	20.0	B3-X72W-0	3.2	---	P4	C	4250	Cap = P
{18AJ10†	20.0	B3-8XW9-0	5.6	---	P4	D	2900	Pent. No. 1	21HD5†	20.0	B3-X79W-0	15.0	---	P4	C	4500	Cap = P
{18AJ10	20.0	B3-3762-5	2.0	---	P4	F	300	Pent. No. 2	21HJ5†	20.0	B3-X792-W	16.0	---	P4	C	4500	Cap = P
18FW6	20.0	ET-1567-2	2.2	---	P4	D	1500	Set Cath. Act. Switch to test pos.	21JS6A†	20.0	B3-5032-4	25.0	---	P4	C	3150	Cap = P
{18FX6	20.0	ET-1562-7	0.8	---	P4	E	600	Ampl. Sect. Set Cath. Act.	21JV6†	20.0	B3-X732-W	15.0	---	P4	C	4700	Cap = P
{18FX6	20.0	ET-1602-7	2.6	---	P4	C	3600	Switch to test pos. Use Adapter SA-4, 1050-168	21JZ6†	20.0	B3-5032-4	16.0	---	P4	C	4400	Cap = P
18FY6	20.0	ET-1702-0	1.4	---	P4	D	700	Triode Sect. Set Cath. Act.	21KA6†	20.0	B3-503W-4	17.0	---	P4	C	4100	Cap = P
{18FY6	20.0	ET-0602-0	0.0	---	P1	D	★	Switch to test pos.	21KQ6	20.0	EV-8039-2	7.0	---	P4	C	5700	Cap-P. Plate Volt-Low Use Adapter SA-8, 1050-168
{18FY6	20.0	ET-0502-0	0.0	---	P1	D	★	Triode Sect. Set Cath. Act. Switch to test pos.	21LG6†	20.0	B3-50X4-0	20.0	---	P4	C	5650	Cap = P
18GB5	20.0	EV-2078-9	16.0	---	P4	C	5000	Diode No. 1	{21LR8†	20.0	EV-2673-0	10.0	---	P4	C	3500	Pent. Sect.
18GD6A	20.0	ET-1567-2	1.8	---	P4	E	1100	Diode No. 2	{21LR8	20.0	EV-9801-0	3.6	---	P4	E	650	Triode Sect.
19AQ5	20.0	ET-1562-0	2.1	---	P4	D	2600	Cap-P. Use Adapter SA-8, 1050-168	{Model 539C: No Adapter Required.								
19AU4	20.0	HY-0503-0	0.0	91	P3	G	★		{21LU8†	20.0	B3-6489-0	10.0	---	P4	C	3500	Pent. Sect.
19CG3†	20.0	B3-0407-0	0.0	90	P3	G	★		{21LU8	20.0	B3-W20X-0	3.6	---	P4	E	650	Triode Sect.
{19CL8A	20.0	EV-9678-0	1.8	---	P4	D	2500	Pent. Sect.	{21MY8†	20.0	B3-3024-0	10.0	---	P4	C	650	Triode Sect.
{19CL8A	20.0	EV-1203-0	0.7	---	P4	C	5000	Triode Sect.	{21MY8	20.0	B3-6489-0	3.6	---	P4	E	650	Triode Sect.
									{22BH3†	20.0	EV-0209-0	0.0	87	P3	G	★	Keep "Power Adjust" at 110V. Adapter SA-4, 1050-144. Note 7

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS		
22BW3†	25.0	B3-0W07-0	0.0	87	P3	G	★	Set "Power Adjust" to 80 Volts	25H-B25	25.0	EV-2079-8	12.0	P4	C	4100	Cap=P	
22DE4	25.0	HY-0503-0	0.0	87	P3	G	★	Keep power adjusted at 80 volts	25HX5	25.0	EV-7963-0	15.0	P4	C	4100	Use Adapter SA-4, 1050-144	
{22JF6†	20.0	EV-2073-8	6.0	---	---	C	5900	Cap=P, Hold Down P1 and Press P4, Use Adapter SA-4, 1050-144, Note 7	{25JQ6	25.0	EV-7139-6	25.0	P4	D	2900	Pent. Sect.	
{Model 539C: No Adapter Required.									{25JQ6	25.0	EV-0609-0	0.0	P1	P	★	Diode Sect.	
{22JG6†	20.0	EV-2973-6	6.0	---	---	C	5900	Hold Down P1 and Press P4, Adapter SA-4, 1050-144, Note 7	{25JZ8†	25.0	B3-7489-0	9.3	P4	C	4100	Pent. Sect.	
{Model 539C: No Adapter Required.									{25JZ8	25.0	B3-W20X-0	5.2	P4	E	1150	Triode Sect.	
{22JR6†	20.0	EV-2913-6	21.5	---	P4	D	2800	Use Adapter SA-4, 1050-144, Note 7	25L6	25.0	HS-5348-1	1.5	---	C	5650	Hold down P1 and Press P4	
{Model 539C: No Adapter Required.									25W4	25.0	HY-0503-0	0.0	P3	G	★	Cap=P	
{22JU6†	20.0	EV-2073-8	21.5	---	P4	D	2800	Cap=P, Use Adapter SA-4, 1050-144, No	26DQ5	25.0	HS-1043-0	26.0	P4	D	3000	Cap=P	
{Model 539C: No Adapter Required.									26HU5	25.0	HY-1032-0	20.0	P4	C	7500	Cap=P	
{22KM6†	20.0	EV-2073-8	20.0	---	P4	C	3000	Cap=P, Use Adapter SA-4, 1050-144, Note 7	26LX6†	25.0	B3-5032-4	20.0	P4	C	7500	Cap=P	
{Model 539C: No Adapter Required.									27LF6†	25.0	B3-5032-4	23.0	P4	C	5200	Cap=P	
{22KV6†	20.0	EV-2913-6	23.0	---	P4	D	2850	Use Adapter SA-4, 1050-144, Note 7	26LW6	25.0	HY-5032-0	20.0	P4	C	7500	Cap=P	
{Model 539C: No Adapter Required.									{28D7	25.0	JR-7536-2	3.5	P4	D	2150	Pent. No. 1	
23JS6†	25.0	B3-5032-4	25.0	---	P4	C	3150	Cap=P	{28D7	25.0	JR-2436-7	3.5	P4	D	2150	Plate Valve=Low	
23MB6†	25.0	B3-5032-4	17.0	---	P4	C	7500	Cap=P	28HA6	25.0	EV-2761-3	0.8	P4	B	8200	Plate Valve=Low	
{23Z9†	25.0	B3-8597-0	7.0	---	P4	C	3400	Pent. Sect.	28HD5†	25.0	B3-X79W-0	15.0	P4	C	4500	Cap=P, Plate Valve=Low, Use Adapter SA-4, 1050-144	
{23Z9	25.0	B3-WX07-0	2.0	---	P4	D	2400	Triode No. 1	29GK6	25.0	EV-2781-3	1.0	P4	C	6300	Triode No. 1, Keep "Power Adjust" at 84V	
{24BF11†	25.0	B3-EXW9-0	6.0	---	P4	C	4700	Triode No. 2	29LE6	25.0	EV-8039-2	7.0	P4	C	5700	Triode No. 2	
{24BF11	25.0	B3-3762-5	3.4	---	P4	E	400	Pent. No. 1	{30AG11†	35.0	B3-8709-0	0.6	P4	C	4900	Cap=P, Plate Valve=Low, Use Adapter SA-4, 1050-144	
{24GA7†	25.0	B3-4735-0	12.0	---	P4	D	2600	Pent. Sect.	{30AG11	35.0	B3-5604-0	0.6	P4	C	4900	Triode No. 1	
{24GA7	25.0	B3-0X08-0	0.0	77	P3	G	★	Diode Sect.	{30AG11	35.0	B3-0W0X-0	0.0	P1	P	★	Diode No. 1	
{24JE6A†	25.0	EV-2073-8	7.0	---	P4	C	5800	Cap=P, Plate Valve=Low, Use Adapter SA-4, 1050-144, Note 7	{30HJ5†	25.0	B3-0302-0	0.0	P1	P	★	Diode No. 2	
{Model 539C: No Adapter Required.									30JZ6†	25.0	B3-X792-W	16.0	P4	C	4500	Cap=P	
24JZ8†	25.0	B3-7489-0	9.3	---	P4	C	4100	Pent. Sect.	30KD6†	35.0	B3-5032-4	16.0	P4	C	4400	Cap=P	
24JZ8	25.0	B3-W20X-0	5.2	---	P4	E	1150	Triode Sect.	30MB6†	35.0	B3-5032-4	15.0	P4	C	9100	Cap=P, Set "Power Adjust" at 87 Volts	
{24LQ6†	25.0	EV-2073-8	7.0	---	P4	C	5800	Cap=P, Plate Valve=Low, Use Adapter SA-4, 1050-144, Note 7	30M-P27	25.0	ET-2761-0	18.0	P4	C	9100	Cap=P, Set "Power Adjust" at 87 Volts	
{Model 539C: No Adapter Required.									30R-K47	25.0	EV-0009-0	0.0	P4	C	2900	Cap=P, Reverse Meter	
{24LZ6†	25.0	EV-6073-8	25.0	---	P4	C	4300	Cap=P, Use Adapter SA-4, 1050-144, Note 7	{31AL10†	35.0	B3-8457-0	8.0	P4	D	3150	Pent. Sect.	
25AV5	25.0	HS-1583-0	6.5	---	---	C	3500	Hold down P1 and Press P4	{31AL10	35.0	B3-W90X-0	2.0	P4	D	1900	Triode No. 1	
25AX4	25.0	HY-0503-0	0.0	89	P3	G	★	Cap=P	{31AL10	35.0	B3-3207-0	5.0	P4	E	1250	Triode No. 2	
25BK5	25.0	EV-3186-0	0.0	---	P4	C	4700	Cap=P	31JS6A†	35.0	B3-5032-4	25.0	P4	C	3150	Cap=P	
25BQ6	25.0	HS-5048-0	12.0	---	P4	C	3500	Cap=P	{31LQ6†	35.0	EV-2073-8	7.0	P4	C	5800	Cap=P, Plate Valve=Low, Use Adapter SA-4, 1050-144, Note 7	
25C5	25.0	ET-2761-0	1.5	---	---	C	5650	Hold down P1 and Press P4	{Model 539C: No Adapter Required.								
25CA5	25.0	DU-2761-0	0.0	---	---	C	5300	Hold down P1 and Press P4	{31LR8†	35.0	EV-2673-0	10.0	P4	C	3500	Pent. Sect. Use Adapter SA-4, 1050-144, Note 7	
25CD6	25.0	HS-5083-0	18.0	---	P4	C	4100	Cap=P	31LR8	35.0	EV-9801-0	3.6	P4	E	650	Triode Sect.	
25CG3†	25.0	B3-0407-0	0.0	90	P3	G	★	Use Adapter SA-4, 1050-144, Note 7	{Model 539C: No Adapter Required.								
{25CK3†	25.0	EV-0209-0	0.0	91	P3	G	★	Short on 4, Use Adapter SA-4, 1050-144, Note 7	{31LZ6	25.0	EV-6073-8	25.0	P4	C	4300	Cap=P, Use Adapter SA-4, 1050-144, Note 7	
{Model 539C: No Adapter Required.									{Model 539C: No Adapter Required.								
25CM3†	25.0	EV-0279-0	0.0	91	P3	G	★	Cap=P	32ET5	35.0	ET-2761-0	11.0	P4	D	2600	Set Cath. Act. Switch to test post.	
{Model 539C: No Adapter Required.									{32GA7†	35.0	B3-4735-0	12.0	P4	D	2600	Pent. Sect.	
25CT3	25.0	EV-0209-0	0.0	90	P3	G	★	Cap=P	{32GA7	35.0	B3-0X08-0	0.0	P3	G	★	Diode Sect.	
25DK3	25.0	EV-0002-0	0.0	90	P3	G	★	Cap=P, Reverse Meter	{32HQ7†	35.0	B3-95X8-0	42.0	P4	D	2850	Pent. Sect.	
25DN6	25.0	HS-5083-0	0.0	---	P4	C	7000	Cap=P, Plate Valve=L	{32HQ7	35.0	B3-0204-0	0.0	P1	P	★	Diode Sect.	
25EC6	25.0	HS-5083-0	19.0	---	P4	C	3100	Cap=P	{33GT7†	35.0	B3-X5W8-0	5.2	---	C	4550	Pent. Sect. Hold down P1 and Press P4	
25EH5	25.0	ET-2761-0	1.2	---	P4	C	6300	Cap=P	{33GT7	35.0	B3-0204-0	0.0	P3	G	★	Diode Sect.	
25F5	25.0	ET-2761-0	7.0	---	P4	D	2500	Cap=P	{33GY7†	35.0	B3-W5X8-0	5.2	---	C	4550	Pent. Sect. Hold down P1 and Press P4	
25F5A	25.0	ET-2761-0	7.0	---	P4	D	2750	Cap=P	{33GY7	35.0	B3-0204-0	0.0	P3	G	★	Diode Sect.	

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS
{33HE7†	35.0	B3-95X8-0	15.0	---	P4	C 4700	Pent. Sect.
{33HE7	35.0	B3-0204-0	0.0	89	P3	G ★	Diode Sect.
{33JR6†	35.0	EV-2913-6	21.5	---	P4	D 2800	Use Adapter SA-4, 1050-144, Note
Model 539C: No Adapter Required.							
{33JV6†	35.0	B3-X732-W	15.0	---	P4	C 4700	
{34CD3†	35.0	B3-0W07-0	0.0	90	P3	G ★	
{34CE3†	35.0	B3-0407-0	0.0	91	P3	G ★	
{34CM3†	35.0	EV-0279-0	0.0	91	P3	G ★	Short on 4, Use Adapter SA-4, 1050-144, Note 7
Model 539C: No Adapter Required.							
{34DK3	35.0	EV-0002-0	0.0	90	P3	G ★	Cap=P, Reverse Meter
{34GD5	35.0	ET-2761-0	9.8	---	P4	D 2950	Hold down P1 and Press P4
{35B5	35.0	ET-1562-0	1.5	---	---	C 3650	Hold down P1 and Press P4
{35C5	35.0	ET-2761-0	1.5	---	---	C 3650	
{35EH5	35.0	ET-2761-0	3.0	---	P4	C 4500	
{35GL6	35.0	ET-2751-0	9.0	---	P4	C 3800	
{35HB8	35.0	EV-9763-0	6.0	---	P4	D 2700	Pent. Sect.
{35HB8	35.0	EV-1302-0	1.4	---	P4	D 2300	Triode Sect.
{35L6	35.0	HS-5348-0	1.5	---	---	C 3650	Hold down P1 and Press P4
{35LR6†	35.0	B3-5032-4	25.0	---	P4	C 4250	Cap=P
{35W4	BLST	ET-0167-0	---	---	---	---	Short on 1-2-3-5 & A-C
{35W4	BLST	ET-0507-0	0.0	91	P3	G ★	Rect. Sect.
{35Z5	BLST	HS-0538-0	---	---	---	---	Short on 1-2-3-5 & A-C
{35Z5	BLST	HS-0508-0	0.0	91	P3	G ★	Rect. Sect.
{36AM3	35.0	ET-0507-0	0.0	88	P3	C 7500	Cap=P
{36KD6†	35.0	B3-5032-4	20.0	---	P4	C 7500	Cap=P
{36LW6	35.0	HY-5032-0	20.0	---	P4	C 7500	Cap=P
{36MC6†	35.0	EV-2073-8	20.0	---	P4	C 7500	Cap=P, Use Adapter SA-4, 1050-144, Note 7
Model 539C: No Adapter Required.							
{38HE7†	50.0	B3-95X8-0	12.0	---	P4	C 4700	Pent. Sect. Set "Power Adjust" to 90 Volts
{38HE7	50.0	B3-0204-0	0.0	88	P3	G ★	Diode Sect.
{38HK7†	50.0	B3-95X8-0	16.0	---	P4	C 4100	Pent. Sect.
{38HK7	50.0	B3-0204-0	0.0	21	P1	G ★	Diode Sect.
{40FR5	35.0	ET-2761-0	11.0	---	P4	D 2300	Cap=P
{40KD6†	35.0	B3-5032-4	20.0	---	P4	C 7500	Cap=P, Reverse Meter
{42EC4	50.0	EV-0007-0	0.0	90	P3	G ★	Use Adapter SA-8, 1050-168
{42KN6†	50.0	B3-5032-4	32.0	---	P4	C 4400	Set Power Adjust At 92 Volts
{50BM8	50.0	EV-3672-0	7.4	---	P4	D 2700	Pent. Sect.
{50BM8	50.0	EV-1908-0	0.6	---	P4	E 1350	Triode Sect.
{50C5	50.0	ET-2761-0	1.5	---	---	C 5650	Hold down P1 and Press P4
{50DC4	50.0	ET-0507-0	0.0	89	P3	G ★	
{50EH5	50.0	ET-2761-0	1.2	---	P4	C 6300	
{50FE5	50.0	HS-5348-0	10.0	---	P4	C 4700	
{50FK5	50.0	ET-2761-0	5.2	---	P4	D 3000	
{50GY7†	50.0	B3-95X8-0	5.2	---	---	C 4550	Pent. Sect. Hold down P1 and Press P4
{50GY7	50.0	B3-0204-0	0.0	90	P3	G ★	Diode Sect.
{50HC6	50.0	ET-2751-0	1.2	---	P4	C 6300	
{50HK6	50.0	ET-2751-0	1.5	---	---	C 6000	Hold Down P1 and Press P4
{50HN5	50.0	EV-2793-0	3.0	---	P4	C 4100	Pent. Sect.
{53HK7†	50.0	B3-95X8-0	16.0	---	P4	C 4100	Diode Sect.
{53HK7	50.0	B3-0204-0	0.0	21	P1	G ★	

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS
5718	6.3 DW-1805-7	0.6	---	---	P4	C	3460 Plate Volts=Low	5930	2.5 ER-3200-0	24.0	---	---	P4	D	1900
5719	6.3 DW-1805-7	0.6	---	---	P4	D	1700	{5931	5.0 JS-0600-0	0.0	87	---	P3	G	★ Plate No. 1
5725	6.3 ET-1562-7	1.8	---	---	P4	D	1400	{5931	5.0 JS-0400-0	0.0	84	---	P3	G	★ Plate No. 2
{5726	6.3 ET-0701-6	0.0	0	0	P1	G	★ Diode No. 1	5932	6.3 HS-5348-1	3.0	---	---	P4	C	3300
{5726	6.3 ET-0205-6	0.0	0	0	P1	G	★ Diode No. 2	5933	6.3 FR-3024-0	6.0	---	---	P4	D	2400 Cap=P
5727	6.3 ET-1602-5	0.0	*	89	P5	G	★ Strikes at about 1.8 V.	{5963	12.6 EV-7608-0	3.2	---	---	P4	D	1950 Triode No. 1
5744	6.3 CT-4105-0	0.6	---	---	P4	C	2500	{5963	12.6 EV-2103-0	3.2	---	---	P4	D	1950 Triode No. 2
5749	6.3 ET-1567-2	1.0	---	---	P4	D	2070	{5964	6.3 ET-5207-6	1.8	---	---	P4	C	3800 Triode No. 1 Bias
{5750	6.3 ET-7562-1	0.0	---	---	---	D	940 Ampl. Sect. Held down PI and Press P4	{5964	6.3 ET-6107-5	1.8	---	---	P4	C	3800 Triode No. 2 Bias
{5750	6.3 ET-1602-7	2.0	---	---	P4	C	4500 Osc. Sect.	{5965	12.6 EV-7608-1	1.8	---	---	P4	C	4100 Triode No. 1 Bias
{5751	12.6 EV-7608-0	1.3	---	---	P4	D	875 Triode No. 1	{5965	12.6 EV-2103-6	1.8	---	---	P4	C	4100 Triode No. 2 Bias
{5751	12.6 EV-2103-0	1.3	---	---	P4	D	875 Triode No. 2	5971	1.1 FT-2100-0	3.0	---	---	P4	D	1260
{5755	12.6 EV-6807-3	0.0	---	---	P4	D	975 Triode No. 1	5975	6.3 EV-3102-0	5.0	---	---	P4	D	2500
{5755	12.6 EV-3102-5	0.0	---	---	P4	D	975 Triode No. 2	5977	6.3 DW-1805-3	1.0	---	---	P4	C	2840
5763	6.3 EV-9167-3	0.0	---	---	P4	C	4400	5987	6.3 DW-1205-0	8.8	---	---	P4	D	1160
5783	Off AP-0305-0	---	---	---	P4	H	87v {Starts at about 115V Regulation=3 Volts From 1.5 to 3.5 MA	{5993	6.3 DX-0905-1	0.0	85	---	P3	G	★ Plate Volts=Low
5784	6.3 DU-7126-5	3.3	---	---	P4	D	1150	{5993	6.3 DX-0105-9	0.0	85	---	P3	G	★ Plate No. 1
5787	Off AP-0305-0	---	---	---	P4	H	100v {Starts at about 130 V Regulation=8 Volts From 5 to 30 MA	5995	6.3 ET-0105-0	0.0	82	---	P3	G	★ Leads=1-3-4-5
{5814	12.6 EV-7608-0	3.2	---	---	P4	D	1950 Triode No. 1	{5998	6.3 HY-4506-2	21.0	---	---	P4	C	5000 Triode No. 1
{5814	12.6 EV-2103-0	3.2	---	---	P4	D	1950 Triode No. 2	{5998	6.3 HY-1203-5	21.0	---	---	P4	C	5000 Triode No. 2
{5829	6.3 DV-0607-0	0.0	0	0	P1	G	★ Diode No. 1	6005	6.3 ET-1562-0	2.1	---	---	P4	D	2600
{5829	6.3 DV-0102-0	0.0	0	0	P1	G	★ Diode No. 2	6012	6.3 HS-3501-8	2.1	89	---	P5	G	★ Strikes at about 3 V.
5840	6.3 DW-1574-0	2.0	---	---	P4	C	2500	{6021	6.3 DW-7805-0	2.1	---	---	P4	C	3000 Triode No. 1
5842	6.3 DZ-5106-0	1.2	---	---	P4	B	15000	{6021	6.3 DW-2104-0	2.1	---	---	P4	C	3000 Triode No. 2
{5844	6.3 ET-5207-0	3.5	---	---	P4	D	2150 Triode No. 1	6028	20.0 ET-1562-0	1.8	---	---	C	3150	
{5844	6.3 ET-6107-0	3.5	---	---	P4	D	2150 Triode No. 2	6046	25.0 HS-5348-1	1.5	---	---	P4	C	5650 Hold down PI and Press P4
5847	6.3 DZ-1684-0	1.7	---	---	P4	B	7800	6050	1.1 ES-3100-0	6.0	---	---	P4	E	1000
{5852	6.3 HS-0508-0	0.0	85	85	P3	G	★ Plate No. 1	6051	1.1 DV-4120-0	8.0	---	---	P4	E	350 Plate Volts=Low
{5852	6.3 HS-0308-0	0.0	85	85	P3	G	★ Plate No. 2	{6052	6.3 DW-0507-4	0.0	89	---	P3	G	★ Plate No. 1
5876	6.3 HS-3506-0	0.5	---	---	P4	C	3750 Use Hickok Adapter SA-9 Code No. 1050-121	{6052	6.3 DW-0102-4	0.0	89	---	P3	G	★ Plate No. 2
5881	6.3 HS-5348-1	3.0	---	---	P4	C	3300	{6053	25.0 DW-0507-4	0.0	89	---	P3	G	★ Plate No. 1
5893	6.3 HS-3506-0	1.4	---	---	P4	C	3800 Use Hickok Adapter SA-9 Code No. 1050-121	{6053	25.0 DW-0102-4	0.0	89	---	P3	G	★ Plate No. 2
{5896	6.3 DW-0507-4	0.0	89	89	P3	G	★ Plate No. 1	6055	25.0 DW-1805-0	2.0	---	---	P4	C	3150 Plate Volts=Low
{5896	6.3 DW-0102-4	0.0	89	89	P3	G	★ Plate No. 2	6056	25.0 DW-1572-0	1.5	---	---	P4	D	1900 Plate Volts=Low
5897	6.3 DW-1805-0	0.0	---	---	P4	C	3660 Plate Volts=Low	{6058	6.3 ET-0701-6	0.0	0	---	P1	G	★ Diode No. 1
5899	6.3 DW-1574-0	1.6	---	---	P4	D	1900	{6058	6.3 ET-0205-6	0.0	0	---	P1	G	★ Diode No. 2
5900	6.3 DW-1574-0	1.6	---	---	P4	D	1900	{6072	12.6 EV-7608-0	2.0	---	---	P4	D	1100 Triode No. 1
5902	6.3 DW-1572-0	1.0	---	---	P4	D	2650	{6072	12.6 EV-2103-0	2.0	---	---	P4	D	1100 Triode No. 2
{5903	25.0 DW-0507-4	0.0	89	89	P3	G	★ Plate No. 1	6073	Off AP-0502-0	---	---	---	P4	H	150v {Starts at about 155 V Regulation=2 Volts From 5 to 30 MA
{5903	25.0 DW-0102-4	0.0	89	89	P3	G	★ Plate No. 2	6074	Off AP-0502-0	---	---	---	P4	H	108v {Starts at about 115 V Regulation=1 Volt From 5 to 30 MA
5904	25.0 DW-1805-0	2.0	---	---	P4	C	3150 Plate Volts=Low	{6080	6.3 HY-0506-4	0.0	83	---	P3	G	★ Triode No. 1, Emission Test. Make No Gas Test.
5905	25.0 DW-1572-0	1.8	---	---	P4	D	1640 Hold down PI and Press P4	{6080	6.3 HY-0203-1	0.0	83	---	P3	G	★ Triode No. 2, Emission Test. Make No Gas Test.
5906	25.0 DW-1572-0	0.6	---	---	P4	C	3150 Plate Volts=Low	{6082	25.0 HY-0506-4	0.0	83	---	P3	G	★ Triode No. 1, Emission Test. Make No Gas Test.
5907	25.0 DW-1572-0	1.5	---	---	P4	D	1100 Plate Volts=Low	{6082	25.0 HY-0203-1	0.0	83	---	P3	G	★ Triode No. 2, Emission Test. Make No Gas Test.
5908	25.0 DW-1572-4	2.0	---	---	P4	D	1100 Plate Volts=Low	6084	6.3 EV-9613-8	2.8	---	---	P4	D	1160 Triode No. 1
{5915A	6.3 ET-1562-7	1.0	---	---	P4	D	700 Grid No. 1 Plate Volts=Low	{6085	12.6 EV-7608-0	2.3	---	---	P4	D	1700 Triode No. 2
{5915A	6.3 ET-7562-1	1.8	---	---	P4	D	440 Grid No. 3 Plate Volts=Low	{6085	12.6 EV-2103-0	2.3	---	---	P4	D	1700 Triode No. 2
{5916	25.0 DW-1572-4	1.4	---	---	P4	D	1000 Grid No. 1 Plate Volts=Low	6086	20.0 EV-2613-9	1.6	---	---	P4	C	5650
{5916	25.0 DW-4572-1	2.2	---	---	P4	D	470 Grid No. 2 Plate Volts=Low	6096	6.3 ET-1562-0	1.8	---	---	P4	C	3150

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS
{6097	6.3 ET-0701-6	0.0	0	P1	G	★	Diode No. 1	6354	Off AP-0102-0				P4	H	{ Starts under 180V. Regulation=5Volts From 5 to 15MA
{6097	6.3 ET-0205-6	0.0	0	P1	G	★	Diode No. 2	6384	6.3 GY-7351-0	4.0			P4	C	Triode No. 1 Plate Volts=Low
6098	6.3 GY-7351-0	4.0		P4	C	3400		{6386	6.3 KR-7608-5	0.7			P4	D	Triode No. 2 Plate Volts=Low
{6110	6.3DW-0507-4	0.0		P1	E	★	Diode No. 1	{6386	6.3 KR-3402-5	0.7			P4	D	
{6110	6.3DW-0102-4	0.0		P1	E	★	Diode No. 2	6397	2.5 HR-8360-0	5.5			P4	E	
{6111	6.3DW-7805-0	4.0		P4	C	3150	Triode No. 1	{6414	12.6 EV-7608-0	0.0			P4	C	Triode No. 1
{6111	6.3DW-2104-0	4.0		P4	C	3150	Triode No. 2	{6414	12.6 EV-2103-0	0.0			P4	C	Triode No. 2
{6112	6.3DW-7805-0	1.8		P4	D	1575	Triode No. 1	6417	12.6 EV-9167-3	0.0			P4	C	
{6112	6.3DW-2104-0	1.8		P4	D	1575	Triode No. 2	6418	1.4 DV-0204-1	0.0			P1	F	OK above 230 on 600 scale Make no gas test
6134	6.3 HS-4865-3	1.0		P4	C	5650		{6463	12.6 EV-8607-1	4.3			P4	C	Triode No. 1
6135	6.3 ET-6107-0	4.8		P4	E	1380		{6463	12.6 EV-3102-6	4.3			P4	C	Triode No. 2
6136	6.3 ET-1567-2	1.0		P4	C	2500		6485	6.3 ET-1567-2	1.0			P4	C	
6137	6.3 HS-4865-3	2.0		P4	D	1260		6519	1.4 DV-4120-0	3.2			P4	F	Set Cath. Act. Switch to Test P Pos. Make no gas test
6146	6.3 HS-5031-8	10.5		P4	C	4400	Cap=P	{6520	6.3 HY-0506-4	0.0			P3	G	Triode No. 1
6148	6.3 DU-7126-5	1.8		P4	C	3150		{6520	6.3 HY-0203-1	0.0			P3	G	Triode No. 2
6152	6.3 EV-3102-0	5.0		P4	D	2500		6526	1.1 DV-4120-0	2.2			P4	E	
6159	25.0 HS-5031-8	10.5		P4	C	4400	Cap=P	6533	6.3 GX-2105-0	3.0			P4	E	
6186	6.3 ET-1562-0	1.7		P4	D	2500	Triode No. 1	6540	6.3 DU-7126-5	1.8			P4	C	
{6189	12.6 EV-7608-0	3.2		P4	D	1950	Triode No. 2	6542	Off AP-0305-0				P4	H	Leads=1, 3, 5, Outside Leads=K Starts At About 185 V Regulation=6 Volts From 5 to 25 MA
{6189	12.6 EV-2103-0	3.2		P4	D	1950		6611	1.4 DV-0204-1	0.0			P1	D	OK above 100 on 500 scale Make no gas test
6197	6.3 EV-2631-7	1.7		P4	C	5000	Triode No. 1	6612	1.4 DV-0204-1	0.0			P1	D	Make no gas test
{6201	12.6 EV-7608-0	1.6		P4	D	2500	Triode No. 2	6626	Off AP-0502-0				P4	H	Starts at about 155 V Regulation=5 Volts From 5 to 30 MA
{6201	12.6 EV-2103-0	1.6		P4	D	2500		6627	Off AP-0502-0				P4	H	Starts at about 110 V Regulation=15 Volts From 5 to 30 MA
{6202	6.3 ET-0607-1	0.0	80	P3	G	★	Plate No. 1	6659	AP-0105-0	0.0			P2	G	Diode No. 1
{6202	6.3 ET-0107-6	0.0	80	P3	G	★	Plate No. 2	6660	6.3 ET-1567-2	1.0			P4	D	Diode No. 2
{6203	6.3 EV-0907-1	0.0	85	P3	G	★	Plate No. 1	6661	6.3 ET-1562-7	0.8			P4	C	
{6203	6.3 EV-0107-9	0.0	85	P3	G	★	Plate No. 2	6662	6.3 ET-1562-7	0.8			P4	C	
6205	6.3DW-1572-4	2.0		P4	C	2500		{6663	6.3 ET-0701-6	0.0			P1	G	
6206	6.3DW-1572-4	1.6		P4	D	1900		{6663	6.3 ET-0205-6	0.0			P1	G	
{6211	12.6 EV-7608-2	3.8		P4	D	2270	Triode No. 1, Bias Cutoff Volts=15V.	6664	6.3 ET-6107-0	1.6			P4	D	
{6211	12.6 EV-2103-7	3.8		P4	D	2270	Triode No. 2, Bias Cutoff Volts=15V.	6669	6.3 ET-1562-0	2.1			P4	D	
6213	Off AP-0305-0			P4	H	130v	Starts at about 170V Regulation=1 Volt From 1 MA to 25 MA	6676	6.3 ET-1562-7	1.0			P4	C	
6216	6.3 EV-2173-0	0.0		P4	C	6300	Plate Volts=Low	6677	6.3 EV-2631-7	1.7			P4	C	
6221	6.3DW-1805-0	0.2		P4	C	3500		{6678	6.3 EV-2637-0	0.8			P4	D	
6222	6.3DW-1805-0	1.8		P4	E	500		6679	6.3 EV-9108-0	1.0			P4	C	Pent. Sect.
6223	6.3DW-1578-0	0.0		P4	E	1300		{6679	12.6 EV-7508-0	1.6			P4	D	Triode No. 1
6245	6.3DU-7126-5	1.8		P4	C	3150	Use Hickok Adapter SA-9 Code No. 1050-121	{6679	12.6 EV-2103-0	1.6			P4	D	Triode No. 2
6247	6.3DW-2805-0	0.6		P4	D	1675	Use Hickok Adapter SA-8 Code No. 1050-121	{6680	12.6 EV-7608-0	3.2			P4	D	Triode No. 1
6263	6.3 HS-3506-0	1.2		P4	C	4500		{6680	12.6 EV-2103-0	3.2			P4	D	Triode No. 2
6264	6.3 HS-3506-0	0.8		P4	C	4250		{6681	12.6 EV-7608-0	1.3			P4	D	Triode No. 1
6265	6.3 ET-1562-7	0.8		P4	C	2150		{6681	12.6 EV-2103-0	1.3			P4	D	Triode No. 2
6225	6.3DW-1572-0	2.6		P4	D	2100		6688	6.3 EV-2791-8	0.4			P4	C	
6285	1.4 ES-3100-0	2.0		P4	D	1250	Set Cath. Act. Switch to TEST Pos. Plate Volts=Low	{6690	6.3DW-7508-0	1.5			P4	C	Triode No. 1
6293	6.3 HS-5031-0	0.5			C	4600	Starts at about 115V Regulation=3 Volts From 15 to 15 MA	{6690	6.3DW-2104-0	1.5			P4	C	Triode No. 2
6303	Off AP-0301-0			P4	H	87v	Starts at about 80 V Regulation=2 Volts From 0.2 to 1.5 MA	{6754	6.3 EV-0907-0	0.0			P3	G	Plate No. 1
6332	Off AP-0102-0			P4	H	63v		{6754	6.3 EV-0103-0	0.0			P3	G	Plate No. 2
{6350	12.6 EV-8607-3	4.5		P4	C	2900	Triode No. 1	6788	6.3DW-1572-0	2.0			P4	E	
{6350	12.6 EV-3102-8	4.5		P4	C	2900	Triode No. 2								

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS
6814	6.3DW-1805-0	3.2	C	3470	P4	C	Triode No. 1	{7199	6.3 EV-7236-0	0.6	C	3800	P4	C	Pent. Sect.
{6829	12.6 EV-7608-0	1.8	C	4200	P4	C	Triode No. 2	{7199	6.3 EV-9108-0	5.2	E	1300	P4	E	Triode Sect.
{6829	12.6 EV-2103-0	1.8	C	4200	P4	C	Triode No. 2	7212	6.3 HS-5031-8	10.5	C	4400	P4	C	Cap = P
{6832	6.3DW-7805-0	5.0	E	650	P4	E	Triode No. 1	7233	6.3 EV-2908-0	5.6	B	11000	P4	B	Plate Volts=Low
{6832	6.3DW-2104-0	5.0	E	650	P4	E	Triode No. 2	{7236	6.3 HY-0506-4	0.0	G	★	P3	G	Triode No. 1. Emission Test.
6872	6.3 DU-7126-5	1.7	E	1300	P4	E	Triode No. 2	{7236	6.3 HY-0203-1	0.0	G	★	P3	G	Triode No. 2. Emission Test.
6883	12.6 HS-5031-8	10.5	C	4400	P4	C	Cap = P	7239	6.3 EV-1069-7	6.0	D	1600	P4	D	Cap = P
{6887	6.3 ET-0701-0	0.0	C	★	P1	C	Diode No. 1	7247	12.6 EV-7608-0	1.3	D	875	P4	D	Triode No. 1
{6887	6.3 ET-0205-0	0.0	C	★	P1	C	Diode No. 2	{7247	12.6 EV-2103-0	4.8	E	1380	P4	E	Triode No. 2
6889	6.3 GY-7051-0	4.0	C	3400	P4	C	Cap = P	7258	12.6 EV-8679-1	0.5	C	4250	P4	C	Pent. Sect.
{6900	12.6 EV-7906-1	5.0	C	4800	P4	C	Triode No. 1	7258	12.6 EV-2173-6	3.2	D	2800	P4	D	Triode Sect.
{6900	12.6 EV-2103-9	5.0	C	4800	P4	C	Triode No. 2	{7308	6.3 EV-7608-0	2.6	C	7000	P4	C	Triode No. 1
{6919	6.3 ET-0701-6	0.0	C	★	P1	C	Diode No. 1	{7308	6.3 EV-2103-0	2.6	C	7000	P4	C	Triode No. 2
{6919	6.3 ET-0205-6	0.0	C	★	P1	C	Diode No. 2	{7316	12.6 EV-7608-0	3.2	D	1950	P4	D	Triode No. 1
{6922	6.3 EV-7608-0	0.0	C	7000	P4	C	Triode No. 1	{7316	12.6 EV-2103-0	3.2	D	1950	P4	D	Triode No. 2
{6922	6.3 EV-2103-0	2.6	C	7000	P4	C	Triode No. 2	7355	6.3 HS-6385-0	2.6	C	4800	P4	C	Triode No. 2
6928	6.3 ET-1562-0	2.1	D	2600	P4	D		7357	25.0 HS-5031-8	10.5	C	4400	P4	C	Cap = P
6943	6.3DW-1572-4	2.6	E	1400	P4	E		7358	6.3 HS-5031-8	10.5	C	4400	P4	C	Cap = P
6944	6.3DW-1572-4	1.8	E	1400	P4	E		7360	6.3 EV-3621-9	1.0	E	1250	P4	E	Connect Pin 1 to Pin 8 and Pin 6 to Pin 7 as Local Socket.
6945	6.3DW-1572-0	12.0	D	2100	P4	D		{7370	20.0 FY-7906-0	5.0	C	4800	P4	C	Triode No. 1
6946	6.3DW-1805-0	5.2	D	2500	P4	D		{7370	20.0 JU-2103-0	5.0	C	4800	P4	C	Triode No. 2
{6947	6.3DW-7805-0	1.8	D	2500	P4	D	Triode No. 1	7408	6.3 HS-5348-1	3.3	D	2600	P4	D	
{6947	6.3DW-2104-0	1.8	D	2500	P4	D	Triode No. 2	7543	6.3 ET-1567-2	1.0	C	2500	P4	C	
{6948	6.3DW-7805-0	1.4	D	1650	P4	D	Triode No. 1	7551	12.6 EV-2631-7	5.0	C	3500	P4	C	
{6948	6.3DW-2104-0	1.4	D	1650	P4	D	Triode No. 2	7558	6.3 EV-2631-7	5.0	C	3500	P4	C	
6973	6.3 EV-3917-0	2.2	D	3000	P4	D		7581	6.3 HS-5348-0	3.0	C	3600	P4	C	
{7025	12.6 EV-7608-0	1.3	D	875	P4	D	Triode No. 1	{7586†	6.3 DR-4208-0	0.8	C	7800	P4	C	Plate Volts=Low. Use Adapter SA-3, 1055-127. Note 7
{7025	12.6 EV-2103-0	1.3	D	875	P4	D	Triode No. 2	Model 539C:	6.3 13-4208-0	0.8	C	7800	P4	C	Plate Volts=Low
7027	6.3 HS-5318-0	3.0	C	3300	P4	C		{7586	6.3 DR-4028-0	1.0	C	4100	---	C	Cap=P. Hold Down Pin 1 and Press Pin 4. Use Adapter SA-3, 1055-127. Note 7
{7036	6.3 ET-1562-7	1.0	D	630	P4	D	Grid No. 1	{7587†	Model 539C:	1.0	C	4100	---	C	Cap=P. Hold Down Pin 1 and Press Pin 4. Use Adapter SA-3, 1055-127. Note 7
{7036	6.3 ET-7562-1	1.8	D	630	P4	D	Grid No. 3	{7587	6.3 13-4028-0	1.0	C	4100	---	C	Cap=P. Hold down Pin 1, press Pin 4.
{7044	12.6 EV-7906-0	2.8	C	6300	P4	C	Triode No. 1	7591	6.3 HS-6345-0	0.5	C	5600	P4	C	
{7044	12.6 EV-2103-0	2.8	C	6300	P4	C	Triode No. 2	7683	6.3 EV-1382-0	0.5	E	1250	P4	E	
7054	12.6 EV-2781-3	1.6	C	5650	P4	C		{7687	6.3 EV-2637-0	1.0	D	2800	P4	D	Pent. Sect.
{7055	12.6 ET-0701-6	0.0	C	★	P1	C	Diode No. 1	{7687	6.3 EV-9108-0	5.0	D	1900	P4	D	Triode Sect.
{7055	12.6 ET-0205-6	0.0	C	★	P1	C	Diode No. 2	7695	50.0 EV-6917-0	8.0	C	6000	P4	C	
7056	12.6 ET-1562-7	1.0	C	3900	P4	C		7701	12.6 EV-2691-0	1.2	D	2100	P4	D	
{7057	12.6 EV-7608-9	2.2	C	4300	P4	C	Triode No. 1	{7716	12.6 EV-7986-0	2.0	C	4000	P4	C	Pent. Sect.
{7057	12.6 EV-2103-9	2.2	C	4300	P4	C	Triode No. 2	{7716	12.6 EV-2301-0	1.0	D	1800	P4	D	Triode Sect.
7058	12.6 EV-7608-0	1.3	D	875	P4	D	Triode No. 1	7717	6.3 ET-1562-0	1.0	C	2800	P4	C	Plate Volts=Low
{7059	12.6 EV-2103-0	1.3	D	875	P4	D	Triode No. 2	7719	12.6 EV-2103-0	5.0	D	1900	P4	D	
7059	12.6 EV-2637-0	0.8	D	2400	P4	D	Pent. Sect.	7724	12.6 EV-8907-0	0.5	E	500	P4	E	Triode Sect.
{7059	12.6 EV-9108-0	1.0	C	5350	P4	C	Triode Sect.	7724	12.6 EV-0601-0	0.0	G	★	P1	G	Diode No. 1
7060	12.6 EV-8679-0	1.3	C	3500	P4	C	Pent. Sect.	7724	12.6 EV-0203-0	0.0	G	★	P1	G	Diode No. 2
{7060	12.6 EV-2103-0	1.2	D	3100	P4	D	Triode Sect.	7728	12.6 EV-7608-0	1.6	D	2500	P4	D	Triode No. 1
7061	12.6 EV-3917-0	2.2	D	2600	P4	D		{7728	12.6 EV-2103-0	1.6	D	2500	P4	D	Triode No. 2
{7119	12.6 EV-7906-0	2.6	B	9850	P4	B	Triode No. 1	{7729	12.6 EV-7608-0	1.3	D	875	P4	D	Triode No. 1
{7119	12.6 EV-2103-0	2.6	B	9850	P4	B	Triode No. 2	{7729	12.6 EV-2103-0	1.3	D	875	P4	D	Triode No. 2
7137	6.3 ET-6702-0	2.0	B	7000	P4	B		7730	12.6 EV-7608-0	3.2	D	1950	P4	D	Triode No. 1
7167	12.6 ET-1562-0	1.0	C	2250	P4	C	Plate Volts=Low	{7730	12.6 EV-2103-0	3.2	D	1950	P4	D	Triode No. 2
7189	6.3 EV-2793-0	0.0	C	4500	P4	C		7730	12.6 EV-2103-0	3.2	D	1950	P4	D	Triode No. 2

TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS	TUBE TYPE	FIL	SELECTORS	BIAS VOLTS	SHUNT	PRESS	MIN. MUT. COND.	NOTATIONS
{7731	6.3 EV-2637-0	0.8	---	---	P4	D	Pent. Sect.	8136	6.3 ET-1562-7	1.0	---	---	P4	C	4400
{7731	6.3 EV-9108-0	1.0	---	---	P4	C	Triode Sect.	8149†	12.6 B3-W789-0	13.0	---	---	P4	C	4150
7732	6.3 ET-1562-7	1.0	---	---	P4	C		8150†	12.6 B3-W086-0	13.0	---	---	P4	C	4150
7733	12.6 EV-2781-3	1.0	---	---	P4	C		8156†	12.6 B3-W376-0	9.0	---	---	P4	D	3600
{7734	6.3 EV-8917-0	1.4	---	---	P4	D	Pent. Sect.	8185	6.3 JR-2306-0	2.4	---	---	P4	B	9000
{7734	6.3 EV-3602-0	20.0	---	---	P4	C	Triode Sect.	8186	25.0 JR-2306-0	2.4	---	---	P4	B	9000
7737	6.3 EV-2791-8	0.4	---	---	P4	C		{8203†	6.3 DR-4208-0	3.4	---	---	P4	C	3450
7738	6.3 ET-2105-0	0.7	---	---	P4	C		{Model 539C:							
7754	6.3 EV-6917-0	8.0	---	---	P4	C	Cap = P	{8203	6.3 13-4208-0	3.4	---	---	P4	C	3450
7757	6.3 DV-6078-0	2.1	---	---	P4	D	Triode No. 1	8236	6.3 HS-1043-0	26.0	---	---	P4	D	3000
{7759	25.0DW-7805-0	2.1	---	---	P4	C	Triode No. 2	8298	6.3 HS-5031-8	10.5	---	---	P4	C	4400
{7759	25.0DW-2104-0	2.1	---	---	P4	C	Triode No. 1	8327	6.3 EV-2793-0	3.8	---	---	P4	C	3800
{7760	25.0DW-7805-0	2.0	---	---	P4	C	Triode No. 2	8334	6.3 ET-6705-0	0.8	---	---	P4	C	7250
{7760	25.0DW-2104-0	2.0	---	---	P4	C	Triode No. 1	{8393†	12.6 DR-4208-0	2.8	---	---	P4	C	5000
7761	25.0DW-1572-0	3.0	---	---	P4	C	Plate Volt=Low	{Model 539C:							
7762	25.0DW-1572-0	11.0	---	---	P4	D	Cap = P	{8393	12.6 13-4208-0	2.8	---	---	P4	C	5000
{7802	6.3 HY-4506-2	12.0	---	---	P4	C	Triode No. 1	8417	6.3 HS-5348-0	0.4	---	---	P4	B	8200
{7802	6.3 HY-1203-5	12.0	---	---	P4	C	Triode No. 2	8425	6.3 ET-1567-2	2.0	---	---	P4	C	2350
{7803	6.3 EV-7608-0	3.0	---	---	P4	C	Triode No. 1	8426	12.6 ET-1567-2	2.0	---	---	P4	C	2350
{7803	6.3 EV-2103-0	3.0	---	---	P4	C	Triode No. 2	{8431	12.6 EV-7608-0	2.4	---	---	P4	C	9400
{7861	12.6 KR-7608-0	2.0	---	---	P4	C	Triode No. 1	{8431	12.6 EV-2103-0	2.4	---	---	P4	C	9400
{7861	12.6 KR-3402-0	2.0	---	---	P4	C	Triode No. 2	{8445	6.3 EV-2637-0	1.0	---	---	P4	C	3500
7867	6.3 HS-5083-0	4.0	---	---	---	C	Cap = P, Hold Down Pl and Press	{8445	6.3 EV-9108-0	2.0	---	---	P4	C	3500
{7868†	6.3 EV-2973-0	2.0	---	---	P4	C	Use Adapter SA-4, 1050-127, Note 7	{8446	6.3 EV-9678-0	0.8	---	---	P4	D	3100
{Model 539C: No Adapter Required.								{8446	6.3 EV-1203-0	1.2	---	---	P4	C	3900
{7889	25.0DW-7805-0	1.8	---	---	P4	D	Triode No. 1	{8489	6.3 EV-8679-0	0.5	---	---	P4	C	3150
{7889	25.0DW-2104-0	1.8	---	---	P4	D	Triode No. 2	{8489	6.3 EV-2103-0	2.2	---	---	P4	C	2800
{7895†	6.3 DR-4203-0	1.8	---	---	P4	C	Use Adapter SA-2, 1050-127, Note 7	8532	6.3 ET-1702-0	2.0	---	---	P4	B	7000
{Model 539C:								8552	12.6 HS-5031-8	10.5	---	---	P4	C	4400
7895	6.3 13-4208-0	1.8	---	---	P4	C	Cap = P	{8628†	6.3 BT-4208-0	1.0	---	---	P4	D	1200
{7898	12.6 EV-7608-0	0.6	---	---	P4	C	OK Above 950 on 300C Scale Make No Gas Test. Use Adapter SA-3, 1050-127, Note 7	{Model 539C:							
{7895	12.6 EV-2103-0	0.6	---	---	P4	C	OK Above 950 on 300C Scale Make No Gas Test	{8056†	6.3 13-4208-0	1.8	---	---	P4	C	5000
7905	6.3 KR-2630-7	1.5	---	---	P4	C	Cap = P, G-Shell. Use Adapter SA-3, 1050-127, Note 7	{8056	6.3 EV-7608-0	0.6	---	---	P4	C	4400
7984†	12.6 B3-V3X9-0	13.0	---	---	P4	C		{8056†	12.6 EV-2103-0	0.6	---	---	P4	C	4100
7995	6.3 ER-3782-6	0.8	---	---	P4	C		{8056†	6.3 KR-2630-7	1.5	---	---	P4	C	4500
8032	12.6 HS-5031-8	10.5	---	---	P4	C		{8056†	12.6 B3-V3X9-0	13.0	---	---	P4	C	6300
{8056†	6.3 DR-0208-4	0.0	---	---	P1	E		{8056†	6.3 ER-3782-6	0.8	---	---	P4	C	4400
{Model 539C:								{8056†	12.6 HS-5031-8	10.5	---	---	P1	E	★
{8056	6.3 13-0208-4	0.0	---	---	P1	E		{8056†	6.3 EV-2973-0	2.0	---	---	P1	E	★
{8056†	6.3 DR-0002-0	1.0	---	---	P4	C		{8056†	6.3 EV-2103-0	0.6	---	---	P4	C	6500
{Model 539C:								{8056†	6.3 KR-2630-7	1.5	---	---	P4	C	
8058	6.3 13-0002-0	1.0	---	---	P4	C	Cap = P, G-Shell	{8058	12.6 EV-7608-0	0.6	---	---	P4	C	4400
8064	25.0DW-1578-0	2.0	---	---	P4	D		{8058	6.3 EV-2103-0	0.6	---	---	P4	C	4400
8068	6.3 HS-5083-0	2.0	---	---	P4	C	Cap = P	{8058	6.3 KR-2630-7	1.5	---	---	P4	C	4100
8077	12.6 EV-2781-3	1.6	---	---	P4	C		{8058	12.6 EV-7608-0	3.0	---	---	P4	C	4500
8084	12.6 DU-1562-7	1.6	---	---	P4	C		{8058	6.3 EV-2103-0	3.0	---	---	P4	C	4500
8096	6.3 CX-2105-0	3.0	---	---	P4	E		{8058	6.3 EV-2103-0	3.0	---	---	P4	C	4500
{8102	12.6 EV-9578-0	1.7	---	---	P4	D	Pent. Sect.	{8058	6.3 EV-2103-0	3.0	---	---	P4	C	4500
{8106	12.6 EV-3102-0	1.3	---	---	P4	C	Triode Sect.	{8058	6.3 EV-2103-0	3.0	---	---	P4	C	4500
8113	6.3 ET-1567-0	2.8	---	---	P4	D		{8058	6.3 EV-2103-0	3.0	---	---	P4	C	4500

OBSOLETE TUBE TYPES
SUPPLEMENTARY TEST DATA

NOTATIONS

NOTE 1: The letter that appears in the RANGE column indicates the setting of the FUNCTION SWITCH.

NOTE 2: (symbol "# " on Roll Chart) Set BIAS VOLTS at 40, press and hold down button indicated in the PRESS column while rotating BIAS VOLTS control until tube strikes. The striking voltages indicated are nominal values and reference to handbook "Critical Grid Characteristics" of Thyratron tubes reveals appreciable variations from these values.

NOTE 3: (symbol "★ " on Roll Chart) Make emission tests only. Good tubes will read above index mark "RECTIFIERS & DIODES OK" on METER.

NOTE 4: Mutual Conductance Values are minimum. Discard tubes which read lower.

NOTE 5: Readjust BIAS VOLTS after button P4 is pressed, then read Gm.

NOTE 6: (symbol "⬇" on Roll Chart) A short indication on position "A" of the SHORTS switch is normal.

NOTE 7: For TUBE TESTER Models 539B and 539C, the Universal Adapter CA-5, 1050-164, is available. This Adapter provides tube test sockets for Compactrons, Novars, 5 and 7-pin Nuvistors, and the new 10-pin tubes, including Decals. Test data for these tubes is supplied in supplementary form with the Adapter. See inside back cover for description of all adapters.

NOTE 8: "Cut off" tube section NOT being tested by means of a 30 to 35 volt battery (Eveready 413, or equal). Polarity and connections are indicated in the NOTATIONS column: e. g., NOTE 8: 7-, 2+, indicates connect negative lead to pin 7 and positive lead to pin 2 of any convenient socket on the tester.

CAUTION: Disconnect battery between any change of SELECTORS.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
0A4	OFF	AP-0572-0	40.0	65	P5	G	----	NOTE 3.
0Y4	BLST	HY-3501-0	0.0	90	P2	G	----	SHORT ON 5. NOTE 3.
1A4	2.0	ER-0230-0	2.5	--	--	E	470	CAP = G. HOLD DOWN P1 & PRESS P4. NOTE 6.
1A5	1.4	HS-5340-0	10.2	--	P4	E	500	NOTE 6.
1A6	2.0	GR-0250-4	2.8	--	--	E	470	PENTODE SECTION. CAP = G. NOTE 6. HOLD DOWN P1 & PRESS P4.
1A6	2.0	GR-4350-2	5.5	--	P4	F	160	OSC. SECTION. NOTE 6.
1A7	1.4	HS-5340-0	0.0	--	--	E	575	PENTODE SECTION. CAP = G. HOLD DOWN P1 & PRESS P4. NOTE 6.
1A7	1.4	HS-5643-0	5.5	--	P4	F	250	OSC. SECTION. NOTE 6.
1AB5	1.1	JR-6230-0	0.0	--	P4	E	900	NOTE 6.
1AC5	1.1	EV-2780-0	3.4	--	P4	E	350	PLATE VOLTS = LOW. NOTE 6.
1AD5	1.1	EV-2780-0	0.5	--	P4	D	460	PLATE VOLTS = LOW. NOTE 6.
1AE4	1.1	BX-6230-0	1.7	--	P4	D	975	NOTE 6.
1AF4	1.4	BX-6230-0	0.4	--	P4	D	600	PLATE VOLTS = LOW. NOTE 6.
1AF5	1.4	BX-6540-0	1.4	--	P4	D	380	PENTODE SECTION. PLATE VOLTS = LOW NOTE 6.
1AF5	1.4	BX-0300-0	0.0	--	P1	D	----	DIODE SECTION. OK ABOVE 300 ON 3000 SCALE. NOTES 3 & 6.
1AG5	1.1	EW-5120-0	4.0	--	P4	F	220	PENTODE SECTION. NOTE 6.
1AG5	1.1	EW-0300-0	0.0	--	P1	D	----	DIODE SECTION. NOTES 3 & 6.
1AJ5	1.1	EW-5120-3	4.0	--	P4	F	270	PENTODE SECTION. NOTE 6.
1AJ5	1.1	EW-0300-0	0.0	--	P1	D	----	DIODE SECTION. NOTES 3 & 6.
1AK5	1.1	EW-5120-3	3.6	--	P4	F	175	PENTODE SECTION. NOTE 6.
1AK5	1.1	EW-0300-0	0.0	--	P1	D	----	DIODE SECTION. NOTES 3 & 6.
1AU3	1.1	HS-0000-0	0.0	--	P5	C	----	CAP = P. NOTES 3 & 6.
1AX2	1.4	BS-0000-0	0.0	--	P5	C	----	CAP = P. NOTES 3 & 6.
1B4	2.0	ER-0230-0	2.3	--	--	E	500	CAP = G. HOLD DOWN P1 & PRESS P4. NOTE 6.
1B5	2.0	GR-5200-0	4.0	--	P4	E	360	TRIODE SECTION. NOTE 6.
1B5	2.0	GR-5400-0	0.0	--	P1	D	----	DIODE NO. 1. NOTES 3 & 6.
1B5	2.0	GR-5300-0	0.0	--	P1	D	----	DIODE NO. 2. NOTES 3 & 6.
1B7	1.4	HS-0340-5	0.0	--	--	E	630	PENTODE SECTION. CAP = G. NOTE 6. HOLD DOWN P1 & PRESS P4.
1B7	1.4	HS-5640-3	0.0	--	--	D	570	OSC. SECTION. HOLD DOWN P1 & PRESS P4. NOTE 6.
1C3	1.4	BX-4200-0	2.6	--	P4	E	480	PLATE VOLTS = LOW. NOTE 6.
1C5	1.4	HS-5340-0	10.6	--	P4	E	1000	NOTE 6.
1C6	2.0	GR-0253-4	2.0	--	--	E	630	AMPL. SECTION. CAP = G. NOTE 6. HOLD DOWN P1 & PRESS P4.
1C6	2.0	GR-4352-0	4.0	--	P4	F	190	OSC. SECTION. NOTE 6.
1C7	2.0	HS-0346-5	2.0	--	--	E	630	PENTODE SECTION. CAP = G. NOTE 6. HOLD DOWN P1 & PRESS P4.
1C7	2.0	HS-5643-0	4.0	--	P4	F	190	OSC. SECTION. NOTE 6.
1D5	2.0	HS-0340-0	0.0	--	--	E	475	CAP = G. HOLD DOWN P1 & PRESS P4. NOTE 6.
1D7	2.0	HS-0346-5	2.8	--	--	E	470	PENTODE SECTION. CAP = G. NOTE 6. HOLD DOWN P1 & PRESS P4.
1D7	2.0	HS-5643-0	5.5	--	P4	F	160	OSC. SECTION. NOTE 6.
1D8	1.4	HS-5346-0	2.0	--	P4	E	550	PENTODE SECTION. NOTE 6.
1D8	1.4	HS-0600-0	1.5	--	P4	F	280	PLATE VOLTS = LOW. TRIODE SECTION. CAP = G. NOTE 6. PLATE VOLTS = LOW.
1D8	1.4	HS-0800-0	0.0	--	P1	D	----	DIODE SECTION. NOTES 3 & 6.
1DN5	1.4	BX-6230-0	2.8	--	P4	D	400	PENTODE SECTION. PLATE VOLTS = LOW NOTE 6.
1DN5	1.4	HR-0400-0	0.0	--	P1	D	----	DIODE SECTION. OK ABOVE 1600 ON 6000 SCALE. NOTES 3 & 6.
1E3	1.1	EV-1800-0	3.5	--	P4	D	2200	NOTE 6.
1E4	1.4	HS-5300-0	0.0	--	P4	E	825	NOTE 6.
1E5	2.0	HS-0340-0	2.3	--	--	E	500	CAP = G. HOLD DOWN P1 & PRESS P4. NOTE 6.
1E7	2.0	HS-5683-4	2.3	--	P4	D	900	PENTODE NO. 1. NOTE 6.
1E7	2.0	HS-4386-5	2.3	--	P4	D	900	PENTODE NO. 2. NOTE 6.
1F4	2.0	FR-3240-0	2.5	--	P4	E	880	NOTE 6.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
1F5	2.0	HS-5340-0	2.5	--	P4	E	880	NOTE 6.
1F6	2.0	GR-0230-0	0.6	--	--	E	410	PENTODE SECTION. CAP = G. NOTE 6.
1F6	2.0	GR-0530-0	0.0	--	P1	D	----	HOLD DOWN P1 & PRESS P4.
1F6	2.0	GR-0430-0	0.0	--	P1	D	----	DIODE NO. 1. OK ABOVE 200 ON 3000 SCALE. NOTES 3 & 6.
1F7	2.0	HS-0360-0	0.6	--	--	E	410	DIODE NO. 2. OK ABOVE 200 ON 3000 SCALE. NOTE 6.
1F7	2.0	HS-0463-0	0.0	--	P1	D	----	PENTODE SECTION. CAP = G. NOTE 6.
1F7	2.0	HS-0563-0	0.0	--	P1	D	----	HOLD DOWN P1 & PRESS P4.
1G4	1.4	HS-5300-0	4.5	--	P4	E	520	DIODE NO. 1. NOTES 3 & 6.
1G5	2.0	HS-5340-0	6.2	--	P4	E	950	DIODE NO. 2. NOTES 3 & 6.
1G6	1.4	HS-5600-0	2.1	--	P4	E	420	PLATE VOLTS = LOW. NOTE 6.
1G6	1.4	HS-4300-0	2.1	--	P4	E	420	NOTE 6.
1H4	2.0	HS-5300-0	9.1	--	P4	E	570	TRIODE NO. 1. NOTE 6.
1H5	1.4	HS-0300-0	0.8	--	P4	F	190	TRIODE NO. 2. NOTE 6.
1H5	1.4	HS-0500-0	0.0	--	P1	D	----	NOTE 6.
1H6	2.0	HS-6300-0	4.0	--	P4	E	360	DIODE SECTION. NOTES 3 & 6.
1H6	2.0	HS-6500-0	0.0	--	P1	D	----	TRIODE SECTION. NOTE 6.
1H6	2.0	HS-6400-0	0.0	--	P1	D	----	DIODE NO. 1. NOTES 3 & 6.
1J3	1.1	HS-0000-0	0.0	--	P5	C	----	DIODE NO. 2. NOTES 3 & 6.
1J5	2.0	HS-5340-0	15.0	--	P4	E	600	CAP = P. NOTES 3 & 6.
1J6	2.0	HS-5600-0	1.9	--	P4	E	630	NOTE 6.
1J6	2.0	HS-4300-0	1.9	--	P4	E	630	TRIODE NO. 1. NOTE 6.
1L4	1.4	HR-6230-0	2.8	--	P4	E	650	TRIODE NO. 2. NOTE 6.
1L6	1.4	BX-6253-4	0.6	--	P4	E	500	NOTE 6.
1L6	1.4	BX-4352-6	0.6	--	P4	F	250	PENTODE SECTION. PLATE VOLTS = LOW
1LA4	1.4	JR-6230-0	10.2	--	P4	E	500	NOTE 6.
1LA6	1.4	JR-6253-4	0.0	--	--	E	630	OSC. SECTION. NOTE 6.
1LA6	1.4	JR-4352-6	0.0	--	P4	F	220	PENTODE SECTION. HOLD DOWN P1 &
1LB4	1.4	JR-6230-0	4.0	--	P4	E	575	PRESS P4. NOTE 6.
1LC5	1.4	JR-6234-0	1.0	--	P4	E	475	OSC. SECTION. NOTE 6.
1LC6	1.4	JR-6253-4	1.0	--	--	E	630	PLATE VOLTS = LOW. NOTE 6.
1LC6	1.4	JR-4352-6	3.5	--	--	E	350	PLATE VOLTS = LOW. NOTE 6.
1LD5	1.4	JR-6230-0	0.0	--	P4	E	500	PENTODE SECTION. HOLD DOWN P1 &
1LD5	1.4	JR-0400-0	0.0	--	P1	D	----	PRESS P4. NOTE 6.
1LE3	1.4	JR-6200-0	4.3	--	P4	E	760	OSC. SECTION. HOLD DOWN P1 & PRESS
1LF3	1.4	JR-6200-0	4.3	--	P4	E	760	P4. NOTE 6.
1LG5	1.4	JR-6234-0	4.2	--	P4	E	660	NOTE 6.
1LH4	1.4	JR-6200-0	0.8	--	P4	F	190	NOTE 6.
1LH4	1.4	JR-6400-0	0.0	--	P1	D	----	TRIODE SECTION. NOTE 6.
1LN5	1.4	JR-6234-0	1.1	--	P4	E	480	DIODE SECTION. NOTES 3 & 6.
1N5	1.4	HS-0340-0	1.1	--	P4	E	480	NOTE 6.
1N6	1.4	HS-5340-0	11.8	--	P4	E	500	NOTE 6.
1N6	1.4	HS-0600-0	0.0	--	P1	D	----	CAP = G. NOTE 6.
1P5	1.4	HS-0340-0	1.0	--	P4	E	500	PENTODE SECTION. NOTE 6.
1Q5	1.4	HS-5340-0	7.5	--	P4	C	1320	DIODE SECTION. OK ABOVE 500 ON
1Q6	1.1	EV-2780-0	2.0	--	P4	F	250	3000 SCALE. NOTES 3 & 6.
1Q6	1.1	EV-0600-0	0.0	--	P1	D	----	CAP = G. NOTE 6.
1R4	1.4	JR-0407-0	0.0	--	P1	D	----	NOTE 6.
1S6	1.1	EV-3180-0	1.5	--	P4	F	280	PENTODE SECTION. NOTE 6.
1S6	1.1	EV-0600-0	0.0	--	P1	D	----	DIODE SECTION. NOTES 3 & 6.
1SA6	1.4	HS-4863-0	0.0	--	--	E	525	DIODE SECTION. OK ABOVE 30

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
1S86	1.4	HS-8500-0	0.0	--	P1	D	----	DIODE SECTION. NOTES 3 & 6. PLATE VOLTS = LOW. NOTE 6. NOTE 6. PENTODE SECTION. NOTE 6. DIODE SECTION. OK ABOVE 300 ON 3000 SCALE. NOTES 3 & 6.
1T4	1.4	BX-6230-0	0.0	--	P4	E	490	
1T5	1.4	HS-5340-0	11.0	--	P4	E	725	
1T6	1.1	EV-3186-0	1.5	--	P4	F	280	
1T6	1.1	EV-0600-0	0.0	--	P1	D	----	
1U5	1.4	BX-6230-0	1.0	--	P4	E	390	PENTODE SECTION. PLATE VOLTS = LOW NOTE 6.
1U5	1.4	BX-6430-0	0.0	--	P1	D	----	DIODE SECTION. NOTES 3 & 6.
1U6	1.4	BX-6253-4	1.6	--	P4	D	630	AMPL. SECTION. PLATE VOLTS = LOW. NOTE 6.
1U6	1.4	BX-4356-2	1.5	--	P4	F	190	OSC. SECTION. NOTE 6.
1V	6.3	ER-0203-0	0.0	89	P3	G	----	NOTE 3.
1V5	1.1	EV-2780-0	3.4	--	P4	E	350	PLATE VOLTS = LOW. NOTE 6.
1V6	1.1	EX-3120-5	0.5	--	P4	F	315	PENTODE SECTION. NOTE 6.
1V6	1.1	EX-5600-3	4.0	--	P4	F	190	TRIODE SECTION. NOTE 6.
1W4	1.4	BX-6230-0	2.5	--	P4	E	580	PLATE VOLTS = LOW. NOTE 6.
1Z2	1.4	BS-0000-0	0.0	12	P5	G	----	CAP = P. NOTES 3 & 6.
2A3	2.5	ER-3200-0	24.0	--	P4	D	1900	NOTE 6.
2A4	2.5	HS-5300-0	--	86	P5	G	----	STRIKES NEAR 8.5 V. NOTES 2,3 & 6
2A5	2.5	GR-4235-0	1.7	--	P4	D	1640	NOTE 6.
2A6	2.5	GR-0205-0	1.1	--	P4	D	700	TRIODE SECTION. CAP = G.
2A6	2.5	GR-0405-0	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
2A6	2.5	GR-0305-0	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
2A7	2.5	HR-0236-5	1.0	--	P4	D	1000	PENTODE SECTION. CAP = G. PLATE VOLTS = LOW.
2A7	2.5	HR-5436-2	4.0	--	P4	F	280	OSC. SECTION.
2B3	1.4	HS-0000-0	0.0	12	P5	G	----	CAP = P. NOTES 3 & 6.
2B4	2.5	FR-3204-0	--	89	P5	G	----	STRIKES AT ABOUT 24 V. NOTES 2 & 3
2B6	2.5	HR-4236-0	7.0	--	P4	E	950	PENTODE SECTION. CAP = G. DIODE NO. 1. NOTE 3. DIODE NO. 2. NOTE 3. TOP WASHER = P. NOTE 3.
2B7	2.5	HR-0236-0	5.6	--	P4	E	630	
2B7	2.5	HR-0536-0	0.0	--	P1	C	----	
2B7	2.5	HR-0436-0	0.0	--	P1	C	----	
2B22	6.3	HS-0008-0	0.0	88	P3	G	----	
2B23	6.3	HS-0308-0	0.0	40	P5	G	----	NOTE 3.
2C4	2.5	HR-3504-0	--	88	P5	G	----	STRIKES AT ABOUT 23 V. NOTES 2 & 3
2C21	6.3	HR-4506-0	7.5	--	P4	E	870	TRIODE NO. 1.
2C21	6.3	HR-0302-0	7.5	--	P4	E	870	TRIODE NO. 2. CAP = G.
2C22	6.3	HS-0008-0	3.7	--	P4	D	1900	FAR CAP = G. NEAR CAP = P.
2C26	6.3	HS-0008-0	2.5	--	P4	E	950	RIGHT CAP = P. LEFT CAP = G.
2C40	6.3	HS-0008-0	1.5	--	P4	C	3000	CAP = P. RING = G.
2C43	6.3	HS-0008-0	0.4	--	P4	C	5000	CAP = P. RING = G.
2C45	7.5	ER-3200-0	8.0	--	P4	E	1380	NOTE 6.
2C50	12.6	HY-1203-0	11.8	--	P4	E	1125	TRIODE NO. 1.
2C50	12.6	HY-4506-0	11.8	--	P4	E	1125	TRIODE NO. 2.
2C52	12.6	HY-4506-2	0.8	--	P4	D	950	TRIODE NO. 1.
2C52	12.6	HY-1203-5	0.8	--	P4	D	950	TRIODE NO. 2.
2C53	6.3	HS-5008-0	0.0	--	P4	F	190	CAP = P.
2DZ4	2.5	ET-2105-0	0.8	--	P4	C	5000	PLATE VOLTS = LOW.
2E5	2.5	GR-5403-0	0.0	--	P4	G	----	EYE OPEN. SHORT ON B.
2E5	2.5	GR-5423-0	0.0	--	P4	G	----	EYE CLOSED. SHORT ON B.
2E22	6.3	FR-3024-0	0.0	--	P4	D	2500	CAP = P.
2E24	6.3	HS-5030-0	7.2	--	P4	D	2000	CAP = P. NOTE 6.
2E25	6.3	HS-5040-8	0.0	--	P4	D	1900	CAP = P. NOTE 6.
2E26	6.3	HS-5031-8	8.0	--	P4	D	2200	CAP = P.
2E30	6.3	ET-1560-2	3.0	--	P4	D	1900	NOTE 6.
2E31	1.1	DV-4120-0	3.0	--	P4	F	315	NOTE 6.
2E32	1.1	DV-4120-0	3.0	--	P4	F	315	NOTE 6.
2E35	1.1	DV-4120-0	3.3	--	P4	F	315	NOTE 6.
2E36	1.1	DV-4120-0	3.3	--	P4	F	315	NOTE 6.
2E41	1.1	EW-5120-0	4.0	--	P4	F	220	PENTODE SECTION. NOTE 6.
2E41	1.1	EW-0300-0	0.0	--	P1	D	----	DIODE SECTION. NOTES 3 & 6.
2E42	1.1	EW-5120-0	4.0	--	P4	F	220	PENTODE SECTION. NOTE 6.
2E42	1.1	EW-0300-0	0.0	--	P1	D	----	DIODE SECTION. NOTES 3 & 6.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
2G21	1.1	EX-3265-1	3.0	--	P4	F	190	HEPTODE SECTION. NOTE 6.
2G21	1.1	EX-3100-6	4.6	--	P4	F	250	TRIODE SECTION. NOTE 6.
2G22	1.1	EX-3265-1	3.0	--	P4	F	190	HEPTODE SECTION. NOTE 6.
2G22	1.1	EX-3100-6	4.6	--	P4	F	250	TRIODE SECTION. NOTE 6.
2V2	2.5	HS-0005-0	0.0	--	P5	E	----	CAP = P. SHORT ON 1. NOTES 3 & 6.
2V3	2.5	HS-0000-0	0.0	12	P5	G	----	CAP = P. NOTES 3 & 6.
2W3	2.5	JS-0400-0	0.0	85	P3	G	----	NOTES 3 & 6.
2X2A	2.5	ER-0000-0	0.0	40	P5	G	----	CAP = P. NOTES 3 & 6.
2Z2	2.5	ER-0200-0	0.0	65	P3	G	----	NOTES 3 & 6.
3A4	2.5	BX-4230-0	1.0	--	--	D	1260	HOLD DOWN P1 & PRESS P4. NOTE 6.
3A5	3.0	BX-5600-0	7.2	--	P4	E	1260	TRIODE NO. 1. NOTE 6.
3A5	3.0	HR-3200-0	7.2	--	P4	E	1260	TRIODE NO. 2. NOTE 6.
3A8	2.5	HS-0340-0	2.2	--	P4	E	470	PENTODE SECTION. CAP = G. NOTE 6.
3A8	2.5	HS-5600-0	0.0	--	P4	F	125	TRIODE SECTION. NOTE 6.
3A8	2.5	HS-0800-0	0.0	--	P1	D	----	DIODE SECTION. NOTES 3 & 6.
3B5	2.5	HS-5340-0	6.2	--	P4	E	950	PLATE VOLTS = LOW. NOTE 6.
3B7	2.5	BY-6700-0	2.8	--	P4	D	1200	TRIODE NO. 1. PLATE VOLTS = LOW. NOTE 6.
3B7	2.5	JR-3200-0	2.8	--	P4	D	1200	TRIODE NO. 2. PLATE VOLTS = LOW. NOTE 6.
3B24	2.5	ER-0000-0	0.0	63	P5	G	----	CAP = P. FIRST HALF OF FIL. NOTES 3 & 6.
3B24	2.5	CR-0000-0	0.0	63	P5	G	----	CAP = P. SECOND HALF OF FIL. NOTES 3 & 6.
3B29	3.0	ER-0000-0	0.0	80	P5	G	----	CAP = P. NOTES 3 & 6.
3C2	3.0	HS-0000-0	0.0	20	P5	G	----	CAP = P. NOTES 3 & 6.
3C6	2.5	BY-5600-0	3.5	--	P4	D	700	TRIODE NO. 1. PLATE VOLTS = LOW. NOTE 6.
3C6	2.5	JR-4300-0	3.5	--	P4	D	700	TRIODE NO. 2. PLATE VOLTS = LOW. NOTE 6.
3CF6	3.0	ET-1562-7	1.0	--	P4	C	3900	
3D6	2.5	JR-6230-0	4.0	--	--	E	1300	HOLD DOWN P1 & PRESS P4. NOTE 6.
3E5	2.5	BX-6235-0	5.0	--	--	E	750	SHORT ON 1. HOLD DOWN P1 & PRESS P4. NOTE 6.
3E6	3.0	JR-6234-0	4.8	--	P4	D	1260	NOTE 6.
3ES5	3.0	ET-2501-0	1.0	--	P4	C	4500	
3FQ5	3.0	ET-2507-0	1.2	--	P4	C	5000	
3FQ5A	3.0	ET-2507-0	1.2	--	P4	C	6500	
3GS8	3.0	EV-7821-9	0.0	--	--	D	630	PENTODE NO. 1. HOLD DOWN P1 & PRESS P4.
3GS8	3.0	EV-7321-6	0.0	--	--	D	630	PENTODE NO. 2. HOLD DOWN P1 & PRESS P4.
3GU5	3.0	ET-1562-0	0.4	--	P4	C	8500	
3HM6	3.0	EV-2781-9	0.8	--	P4	C	6700	
3HS8	3.0	EV-7821-9	1.0	--	P4	D	500	PENTODE NO. 1.
3HS8	3.0	EV-7321-6	1.0	--	P4	D	500	PENTODE NO. 2.
3HT6	3.0	EV-2781-9	0.8	--	P4	C	5300	
3LE4	2.5	JR-6230-0	5.6	--	P4	E	1200	NOTE 6.
3LF4	2.5	JR-6230-0	5.6	--	P4	E	1200	NOTE 6.
3Q4	3.0	HR-3240-0	4.0	--	P4	E	1350	NOTE 6.
3Q5	2.5	HS-5340-0	8.3	--	P4	E	1130	NOTE 6.
3S4	2.5	HR-3240-0	5.0	--	P4	E	950	PLATE VOLTS = LOW. NOTE 6.
4A6	3.0	HS-5600-0	7.2	--	P4	D	630	TRIODE NO. 1. NOTE 6.
4A6	3.0	CX-4300-0	7.2	--	P4	D	630	TRIODE NO. 2. NOTE 6.
4BA6	4.3	ET-1567-2	1.0	--	P4	D	2070	
4BE6	4.3	ET-7562-1	0.0	--	--	D	940	AMPL. SECTION. HOLD DOWN P1 & PRESS P4.
4BE6	4.3	ET-1602-7	2.0	--	P4	C	4500	OSC. SECTION.
4BX8	4.3	EV-7608-9	1.0	--	P4	C	3400	TRIODE NO. 1. PLATE VOLTS = LOW.
4BX8	4.3	EV-2103-9	1.0	--	P4	C	3400	TRIODE NO. 2. PLATE VOLTS = LOW.
4BZ8	4.3	EV-7608-9	2.2	--	P4	C	2500	TRIODE NO. 1.
4BZ8	4.3	EV-2103-9	2.2	--	P4	C	2500	TRIODE NO. 2.
4CE5	4.3	ET-1562-0	1.0	--	P4	C	3900	
4GW5	4.3	ET-2105-0	1.2	--	P4	B	9400	
5A6	5.0	EV-7160-3	12.0	--	P4	D	1900	NOTE 6.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
5AS4	5.0	JS-0600-0	0.0	87	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
5AS4	5.0	JS-0400-0	0.0	84	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
5AW4	5.0	JS-0600-4	0.0	88	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
5AW4	5.0	JS-0400-6	0.0	87	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
5AX4	5.0	JS-0600-0	0.0	80	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
5AX4	5.0	JS-0400-0	0.0	84	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
5AZ4	5.0	JS-0600-4	0.0	75	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
5AZ4	5.0	JS-0400-6	0.0	70	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
5BS8	5.0	EV-7608-9	0.0	--	P4	C	4100	TRIODE NO. 1. PLATE VOLTS = LOW.
5BS8	5.0	EV-2103-9	0.0	--	P4	C	4100	TRIODE NO. 2. PLATE VOLTS = LOW.
5BZ7	5.0	EV-7608-9	2.2	--	P4	C	4300	TRIODE NO. 1.
5BZ7	5.0	EV-2103-9	2.2	--	P4	C	4300	TRIODE NO. 2.
5CM6	5.0	EV-3917-0	3.3	--	P4	D	2600	
5CR8	5.0	EV-2673-8	1.0	--	P4	D	3000	PENTODE SECTION.
5CR8	5.0	EV-9108-0	2.8	--	P4	D	2500	TRIODE SECTION.
5CU4	5.0	JS-0601-0	0.0	90	P3	G	----	PLATE NO. 1. NOTE 3.
5CU4	5.0	JS-0401-0	0.0	90	P3	G	----	PLATE NO. 2. NOTE 3.
5EH8	5.0	EV-7986-0	1.0	--	P4	D	2700	PENTODE SECTION.
5EH8	5.0	EV-2301-0	1.6	--	P4	C	4700	TRIODE SECTION.
5T4	5.0	JS-0600-0	0.0	88	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
5T4	5.0	JS-0400-0	0.0	86	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
5W4	5.0	JS-0600-0	0.0	77	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
5W4	5.0	JS-0400-0	0.0	74	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
5X3	5.0	ER-0300-0	0.0	75	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
5X3	5.0	ER-0200-0	0.0	70	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
5X4	5.0	HY-0500-0	0.0	87	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
5X4	5.0	HY-0300-0	0.0	84	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
5Y4	5.0	HY-0500-0	0.0	80	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
5Y4	5.0	HY-0300-0	0.0	75	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
5Z3	5.0	ER-0300-0	0.0	87	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
5Z3	5.0	ER-0200-0	0.0	84	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
5Z4	5.0	JS-0600-0	0.0	91	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
5Z4	5.0	JS-0400-0	0.0	91	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
6A3	6.3	ER-3200-0	26.0	--	P4	D	1900	NOTE 6.
6A4	6.3	FR-3240-0	5.0	--	P4	E	1260	NOTE 6.
6A5	6.3	HS-5300-0	26.0	--	P4	D	1900	NOTE 6.
6A6	6.3	HR-5604-0	2.3	--	P4	D	950	TRIODE NO. 1.
6A6	6.3	HR-3204-0	2.3	--	P4	D	950	TRIODE NO. 2.
6A7	6.3	HR-0236-5	1.0	--	P4	D	1000	PENTODE SECTION. CAP = G. PLATE VOLTS = LOW.
6A7	6.3	HR-5436-2	4.0	--	P4	F	280	OSC. SECTION.
6A8	6.3	HS-0348-5	1.0	--	P4	D	1000	PENTODE SECTION. CAP = G. PLATE VOLTS = LOW.
6A8	6.3	HS-5648-3	4.0	--	P4	F	280	OSC. SECTION.
6AB5	6.3	GR-5403-0	0.0	--	P4	G	----	EYE OPEN. SHORT ON B.
6AB5	6.3	GR-5423-0	0.0	--	P4	G	----	EYE CLOSED. SHORT ON B.
6AB6	6.3	HS-5348-0	0.9	--	P4	D	920	
6AB7	6.3	HS-4865-3	2.0	--	P4	D	2200	
6AB8	6.3	EV-9683-7	4.0	--	P4	D	2100	PENTODE SECTION.
6AB8	6.3	EV-2103-0	5.0	--	P4	D	850	TRIODE SECTION.
6AC5	6.3	HS-5308-0	0.0	--	P4	E	630	
6AC6	6.3	HS-5348-0	0.0	--	P4	E	1500	
6AD4	6.3	DW-1805-0	1.7	--	P4	D	1260	
6AD6	6.3	HS-4358-0	0.0	--	P4	G	----	EYE 1 OPEN. EYE 2 CLOSED.
6AD6	6.3	HS-3458-0	0.0	--	P4	G	----	EYE 1 CLOSED. EYE 2 OPEN.
6AD7	6.3	HS-5348-6	5.3	--	P4	E	1260	PENTODE SECTION.
6AD7	6.3	HS-1608-3	0.0	--	P4	E	380	TRIODE SECTION.
6AE5	6.3	HS-5308-0	25.5	--	P4	E	750	
6AE6	6.3	HS-5408-3	0.0	--	P4	E	470	TRIODE NO. 1.
6AE6	6.3	HS-5308-4	0.0	--	P4	E	540	TRIODE NO. 2.
6AE7	6.3	HS-6308-4	7.6	--	P4	E	950	TRIODE NO. 1.
6AE7	6.3	HS-4305-6	7.6	--	P4	E	950	TRIODE NO. 2.
6AF5	6.3	HS-5308-0	15.3	--	P4	E	950	

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
6AF6	6.3	HS-4358-0	0.0	--	P4	G	----	EYE 1 OPEN. EYE 2 CLOSED.
6AF6	6.3	HS-3458-0	0.0	--	P4	G	----	EYE 2 OPEN. EYE 1 CLOSED.
6AH4	6.3	HS-1508-0	11.0	--	P4	C	3460	
6AH6	6.3	ET-1567-2	1.0	--	P4	C	5650	
6AH7	6.3	HY-5604-3	4.0	--	P4	D	1500	TRIODE NO. 1.
6AH7	6.3	HY-1302-6	4.0	--	P4	D	1500	TRIODE NO. 2.
6AJ4	6.3	JX-1502-0	2.2	--	P4	C	6300	
6AJ5	6.3	ET-1562-0	1.8	--	P4	D	1600	PLATE VOLTS = LOW.
6AJ7	6.3	HS-4865-3	1.0	--	P4	C	5650	
6AK4	6.3	DW-1805-7	4.0	--	P4	D	2400	
6AK7	6.3	HS-4865-1	1.7	--	P4	C	5000	
6AL7	6.3	HS-6358-0	--	--	P4	G	----	BIAS CONTROLS LEFT PATTERN. BIAS = VARY.
6AL7	6.3	HS-5348-0	--	--	P4	G	----	BIAS CONTROLS BOTH PATTERNS. BIAS = VARY.
6AL7	6.3	HS-4358-0	--	--	P4	G	----	BIAS CONTROLS RIGHT PATTERN. BIAS = VARY.
6AM4	6.3	JX-1502-0	0.8	--	P4	C	5650	
6AN6	6.3	HR-0506-0	0.0	--	P1	E	----	PLATE NO. 1. NOTE 3.
6AN6	6.3	HR-0406-0	0.0	--	P1	E	----	PLATE NO. 2. NOTE 3.
6AN6	6.3	HR-0306-0	0.0	--	P1	E	----	PLATE NO. 3. NOTE 3.
6AN6	6.3	HR-0206-0	0.0	--	P1	E	----	PLATE NO. 4. NOTE 3.
6AQ6	6.3	ET-1702-0	1.8	--	P4	D	725	TRIODE SECTION.
6AQ6	6.3	ET-0602-0	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
6AQ6	6.3	ET-0502-0	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
6AQ7	6.3	HY-4506-0	1.5	--	P4	E	630	TRIODE SECTION.
6AQ7	6.3	HY-4102-0	0.0	--	P1	C	----	DIODE NO. 1. NOTE 3.
6AQ7	6.3	HY-4302-0	0.0	--	P1	C	----	DIODE NO. 2. NOTE 3.
6AR5	6.3	ET-1562-0	9.0	--	P4	E	1000	
6AR6	6.3	GY-7351-0	4.0	--	P4	C	3400	
6AR8	6.3	EV-6937-2	0.8	--	P4	D	2200	PLATE NO. 1. DISREGARD NEON FLASH IN SHORT TESTING.
6AR8	6.3	EV-6837-2	0.8	--	P4	D	2200	PLATE NO. 2. DISREGARD NEON FLASH IN SHORT TESTING.
6AS5	6.3	ET-2761-0	10.5	--	P4	C	3530	
6AU7	6.3	EV-7608-0	3.2	--	P4	D	1950	TRIODE NO. 1.
6AU7	6.3	EV-2103-0	3.2	--	P4	D	1950	TRIODE NO. 2.
6AV5	6.3	HS-1583-0	6.5	--	--	C	3500	HOLD DOWN P1 & PRESS P4.
6AW7	6.3	HY-2601-0	0.0	--	P4	E	750	TRIODE SECTION.
6AW7	6.3	HY-2305-0	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
6AW7	6.3	HY-2401-0	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
6AX6	6.3	HS-0508-0	0.0	91	P3	G	----	PLATE NO. 1. NOTE 3.
6AX6	6.3	HS-0304-0	0.0	91	P3	G	----	PLATE NO. 2. NOTE 3.
6AX7	6.3	EV-7608-0	1.3	--	P4	D	875	TRIODE NO. 1.
6AX7	6.3	EV-2103-0	1.3	--	P4	D	875	TRIODE NO. 2.
6AX8	6.3	EV-2637-0	0.8	--	P4	D	2400	PENTODE SECTION.
6AX8	6.3	EV-9108-0	1.0	--	P4	C	5350	TRIODE SECTION.
6AZ5	6.3	DW-0807-0	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
6AZ5	6.3	DW-0102-0	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
6AZ6	6.3	DW-0204-8	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
6AZ6	6.3	DW-0705-8	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
6B4	6.3	HS-5300-0	25.0	--	P4	D	1900	
6B5	6.3	GR-4235-0	1.5	--	P4	D	950	
6B6	6.3	HS-0308-0	0.9	--	P4	D	700	TRIODE SECTION. CAP = G.
6B6	6.3	HS-0508-0	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
6B6	6.3	HS-0408-0	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
6B7	6.3	HR-0236-0	5.6	--	P4	E	630	PENTODE SECTION. CAP = G.
6B7	6.3	HR-0536-0	0.0	--	P1	C	----	DIODE NO. 1. NOTE 3.
6B7	6.3	HR-0436-0	0.0	--	P1	C	----	DIODE NO. 2. NOTE 3.
6B8	6.3	HS-0368-1	4.0	--	P4	E	720	PENTODE SECTION. CAP = G.
6B8	6.3	HS-0568-1	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
6B8	6.3	HS-0468-1	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
6BD5	6.3	HS-1583-0	2.3	--	P4	D	3150	
6BD6	6.3	ET-1567-2	3.0	--	P4	D	1260	

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
6BE7	6.3	EV-7163-9	6.0	--	P4	E	630	PENTODE SECTION. NOTE 6. TRIODE SECTION.
6BE8	6.3	EV-9678-3	0.8	--	P4	D	2400	
6BE8	6.3	EV-1203-0	1.0	--	P4	C	5350	
6BF5	6.3	ET-1562-0	12.2	--	P4	D	2450	
6BF6	6.3	ET-1702-0	3.0	--	P4	E	1200	
6BF6	6.3	ET-1602-0	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
6BF6	6.3	ET-1502-0	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
6BF7	6.3	DW-7805-0	1.6	--	P4	D	3000	TRIODE NO. 1.
6BF7	6.3	DW-2104-0	1.6	--	P4	D	3000	TRIODE NO. 2.
6BF8	6.3	EV-0906-0	0.0	--	P1	G	----	DIODE NO. 1. NOTE 3.
6BF8	6.3	EV-0806-0	0.0	--	P1	G	----	DIODE NO. 2. NOTE 3.
6BF8	6.3	EV-0706-0	0.0	--	P1	G	----	DIODE NO. 3. NOTE 3.
6BF8	6.3	EV-0306-0	0.0	--	P1	G	----	DIODE NO. 4. NOTE 3.
6BF8	6.3	EV-0206-0	0.0	--	P1	G	----	DIODE NO. 5. NOTE 3.
6BF8	6.3	EV-0106-0	0.0	--	P1	G	----	DIODE NO. 6. NOTE 3.
6BG6	6.3	HS-5083-0	4.5	--	P4	C	3800	CAP = P.
6BG7	6.3	DW-7805-0	1.6	--	P4	D	3000	TRIODE NO. 1.
6BG7	6.3	DW-2104-0	1.6	--	P4	D	3000	TRIODE NO. 2.
6BJ6	6.3	ET-1562-7	0.8	--	P4	C	2400	
6BK5	6.3	EV-3186-0	0.0	--	P4	C	4700	
6BK6	6.3	ET-1702-5	0.8	--	P4	D	790	TRIODE SECTION.
6BK6	6.3	ET-0602-5	0.0	--	P1	C	----	DIODE NO. 1. NOTE 3.
6BK6	6.3	ET-0502-7	0.0	--	P1	C	----	DIODE NO. 2. NOTE 3.
6BL4	6.3	HY-0503-0	0.0	90	P3	G	----	NOTE 3.
6BS8	6.3	EV-7608-9	0.0	--	P4	C	4100	TRIODE NO. 1. PLATE VOLTS = LOW.
6BS8	6.3	EV-2103-9	0.0	--	P4	C	4100	TRIODE NO. 2. PLATE VOLTS = LOW.
6BT6	6.3	ET-1702-0	2.1	--	P4	D	820	TRIODE SECTION.
6BT6	6.3	ET-1602-0	0.0	--	P1	C	----	DIODE NO. 1. NOTE 3.
6BT6	6.3	ET-1502-0	0.0	--	P1	C	----	DIODE NO. 2. NOTE 3.
6BT8	6.3	EV-8679-0	1.0	--	P4	C	3900	PENTODE SECTION.
6BT8	6.3	EV-0103-0	0.0	--	P1	E	----	DIODE NO. 1. NOTE 3.
6BT8	6.3	EV-0203-0	0.0	--	P1	E	----	DIODE NO. 2. NOTE 3.
6BU6	6.3	ET-1702-0	6.0	--	P4	E	950	TRIODE SECTION.
6BU6	6.3	ET-1602-0	0.0	--	P1	C	----	DIODE NO. 1. NOTE 3.
6BU6	6.3	ET-1502-0	0.0	--	P1	C	----	DIODE NO. 2. NOTE 3.
6BV8	6.3	EV-2301-0	2.3	--	P4	C	3500	TRIODE SECTION.
6BV8	6.3	EV-0907-0	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
6BV8	6.3	EV-0608-0	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
6BW4	6.3	EV-0709-1	0.0	75	P3	G	----	PLATE NO. 1. NOTE 3.
6BW4	6.3	EV-0109-7	0.0	75	P3	G	----	PLATE NO. 2. NOTE 3.
6BX6	6.3	EV-2781-9	0.5	--	P4	C	4500	
6BX7	6.3	HY-4506-2	7.0	--	P4	C	4800	TRIODE NO. 1.
6BX7	6.3	HY-1203-5	7.0	--	P4	C	4800	TRIODE NO. 2.
6BX8	6.3	EV-7608-9	1.0	--	P4	C	3400	TRIODE NO. 1. PLATE VOLTS = LOW.
6BX8	6.3	EV-2103-9	1.0	--	P4	C	3400	TRIODE NO. 2. PLATE VOLTS = LOW.
6BY5	6.3	HS-0508-0	0.0	88	P3	G	----	PLATE NO. 1. NOTE 3.
6BY5	6.3	HS-0401-0	0.0	88	P3	G	----	PLATE NO. 2. NOTE 3.
6BZ8	6.3	EV-7608-9	2.2	--	P4	C	2500	TRIODE NO. 1.
6BZ8	6.3	EV-2103-9	2.2	--	P4	C	2500	TRIODE NO. 2.
6C5	6.3	HS-5308-0	4.2	--	P4	E	1260	
6C6	6.3	GR-0235-4	3.3	--	P4	E	770	CAP = G.
6C7	6.3	HR-0206-0	6.9	--	P4	E	780	TRIODE SECTION. CAP = G.
6C7	6.3	HR-0506-0	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
6C7	6.3	HR-0406-0	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
6C8	6.3	HS-5608-0	2.1	--	P4	D	1000	TRIODE NO. 1.
6C8	6.3	HS-0304-0	2.1	--	P4	D	1000	TRIODE NO. 2. CAP = G.
6CF6	6.3	ET-1562-7	1.0	--	P4	C	3900	
6CH7	6.3	EV-7608-0	2.2	--	P4	C	4300	TRIODE NO. 1.
6CH7	6.3	EV-2103-0	2.2	--	P4	C	4300	TRIODE NO. 2.
6CH8	6.3	EV-7236-0	0.8	--	P4	C	3900	PENTODE SECTION. DISREGARD NEON FLASH IN SHORT TESTING.
6CH8	6.3	EV-8901-0	4.6	--	P4	D	2100	TRIODE SECTION.
6CJ6	6.3	EV-2073-1	16.0	--	P4	D	2900	CAP = P.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
6CK4	6.3	HS-1508-0	16.0	--	P4	C	3500	PENTODE SECTION.
6CK6	6.3	EV-2713-6	0.5	--	P4	C	6300	
6CM8	6.3	EV-2673-0	1.0	--	P4	C	3900	
6CM8	6.3	EV-9108-0	1.1	--	P4	D	1260	TRIODE SECTION.
6CR6	6.3	ET-7561-2	2.8	--	P4	D	1225	PENTODE SECTION.
6CR6	6.3	ET-0201-0	0.0	--	P1	D	----	DIODE SECTION. NOTE 3.
6CR8	6.3	EV-2673-8	1.0	--	P4	D	3000	PENTODE SECTION.
6CR8	6.3	EV-9108-0	2.8	--	P4	D	2500	TRIODE SECTION.
6CU6	6.3	HS-5048-0	12.0	--	P4	C	3500	CAP = P.
6D4	6.3	ET-1705-0	--	87	P5	G	----	STRIKES AT ABOUT 21 V. NOTES 2 & 3
6D5	6.3	HS-5308-0	19.0	--	P4	D	1260	
6D6	6.3	GR-0235-4	3.3	--	P4	E	1000	CAP = G.
6D7	6.3	HR-0236-4	4.0	--	P4	E	770	CAP = G.
6D8	6.3	HS-0348-5	0.0	--	--	E	820	AMPL. SECTION. CAP = G.
6D8	6.3	HS-5648-3	0.5	--	P4	F	190	HOLD DOWN P1 & PRESS P4.
6DA6	6.3	EV-2783-9	2.2	--	P4	D	1900	OSC. SECTION.
6DA7	6.3	EV-7608-0	3.4	--	P4	D	1650	TRIODE NO. 1.
6DA7	6.3	EV-3109-0	15.0	--	P4	C	3700	TRIODE NO. 2.
6DB6	6.3	ET-1562-7	2.0	--	P4	D	1300	GRID NO. 1.
6DB6	6.3	ET-7562-1	3.2	--	--	D	630	GRID NO.3. HOLD DOWN P1 & PRESS P4
6DN6	6.3	HS-5083-0	0.0	--	P4	C	7000	CAP = P. PLATE VOLTS = LOW.
6DW5	6.3	EV-3917-0	12.0	--	P4	C	3500	
6DX4	6.3	ET-2105-0	3.6	--	P4	C	5350	
6E5	6.3	GR-5403-0	0.0	--	P4	G	----	EYE OPEN. SHORT ON B.
6E5	6.3	GR-5423-0	0.0	--	P4	G	----	EYE CLOSED. SHORT ON B.
6E6	6.3	HR-5604-0	13.5	--	P4	E	880	TRIODE NO. 1.
6E6	6.3	HR-3204-0	13.5	--	P4	E	880	TRIODE NO. 2.
6E7	6.3	HR-0236-4	4.0	--	P4	E	950	CAP = G.
6F4	6.3	GR-2307-0	2.2	--	P4	C	3800	PLATE VOLTS = LOW.
MODEL 539C#								
6F4	6.3	HS-1306-0	2.2	--	P4	C	3800	PLATE VOLTS = LOW. USE ADAPTER
6F5	6.3	HS-0408-1	0.9	--	P4	D	950	SA-7, 1050-9.
6F6	6.3	HS-5348-1	1.7	--	P4	D	1640	CAP = G.
6F7	6.3	HR-0236-5	5.0	--	P4	E	700	PENTODE SECTION. CAP = G.
6F7	6.3	HR-5406-3	5.0	--	P4	E	315	TRIODE SECTION.
6F8	6.3	HS-5608-0	4.8	--	P4	E	1260	TRIODE NO. 1.
6F8	6.3	HS-0304-0	4.8	--	P4	E	1260	TRIODE NO. 2. CAP = G.
6FH6	6.3	HS-5048-0	0.0	--	P4	C	3100	CAP = P. PLATE VOLTS = LOW.
6FR7	6.3	EV-7608-0	1.6	--	P4	D	1000	TRIODE NO. 1.
6FR7	6.3	EV-3109-0	17.0	--	P4	C	6000	TRIODE NO. 2.
6FW8	6.3	EV-7608-0	3.0	--	P4	C	5400	TRIODE NO. 1.
6FW8	6.3	EV-2103-0	3.0	--	P4	C	5400	TRIODE NO. 2.
6G5	6.3	GR-5403-0	0.0	--	P4	G	----	EYE OPEN. SHORT ON B.
6G5	6.3	GR-5423-0	0.0	--	P4	G	----	EYE CLOSED. SHORT ON B.
6G6	6.3	HS-5348-0	5.6	--	P4	C	1325	
6GC6	6.3	HS-5083-0	15.0	--	P4	C	3600	CAP = P.
6GD7	6.3	EV-9678-0	0.6	--	P4	C	5250	PENTODE SECTION.
6GD7	6.3	EV-1203-0	1.4	--	P4	C	6250	TRIODE SECTION.
6GS8	6.3	EV-7821-9	0.0	--	--	D	630	PENTODE NO. 1. HOLD DOWN P1 & PRESS P4.
6GS8	6.3	EV-7321-6	0.0	--	--	D	630	PENTODE NO. 2. HOLD DOWN P1 & PRESS P4.
6GW5	6.3	ET-2105-0	1.2	--	P4	B	9400	
6H4	6.3	HS-0408-0	0.0	0	P1	G	----	NOTE 3.
6H5	6.3	GR-5403-0	0.0	--	P4	G	----	EYE OPEN. SHORT ON B.
6H5	6.3	GR-5423-0	0.0	--	P4	G	----	EYE CLOSED. SHORT ON B.
6H6	6.3	HS-0508-0	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
6H6	6.3	HS-0304-0	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
6J5	6.3	HS-5308-0	3.7	--	P4	D	1640	
6J7	6.3	HS-0348-5	4.0	--	P4	E	770	CAP = G.
6J8	6.3	HS-5348-6	2.5	--	P4	D	630	HEPTODE SECTION. CAP = G.
								SEE NEXT PAGE FOR CONTINUATION

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
6J8	6.3	HS-5608-4	3.0	--	P4	D	1000	TRIODE SECTION.
6JA8	6.3	EV-7986-0	1.0	--	P4	C	5700	TETRODE SECTION.
6JA8	6.3	EV-2301-0	1.6	--	P4	D	2200	TRIODE SECTION.
6K4	6.3	DU-2105-0	1.1	--	P4	C	3500	PLATE VOLTS = LOW.
6K5	6.3	HS-0308-0	2.0	--	P4	D	880	CAP = G.
6K7	6.3	HS-0348-5	2.8	--	P4	E	910	CAP = G.
6K8	6.3	HS-5348-6	1.1	--	P4	D	630	HEXODE SECTION. CAP = G.
6K8	6.3	HS-5608-4	2.0	--	P4	D	1900	TRIODE SECTION.
6KS8	6.3	EV-7986-0	2.8	--	P4	C	4000	PENTODE SECTION.
6KS8	6.3	EV-2301-0	1.2	--	P4	D	2500	TRIODE SECTION.
6L4	6.3	GR-2307-0	1.4	--	P4	C	4000	PLATE VOLTS = LOW.
MODEL 539C#								
6L4	6.3	HS-1306-0	1.4	--	P4	C	4000	PLATE VOLTS = LOW. USE ADAPTER SA-7, 1050-9.
6L5	6.3	HS-5308-0	6.0	--	P4	E	950	
6L7	6.3	HS-0348-5	5.0	--	P4	E	410	CAP GRID. CAP = G.
6L7	6.3	HS-5348-1	5.0	--	P4	E	410	PIN GRID.
6N4	6.3	ET-1502-0	1.7	--	P4	C	3800	
6N5	6.3	GR-5403-0	0.0	100	P4	G	----	EYE OPEN. SHORT ON B.
6N5	6.3	GR-5423-0	0.0	100	P4	G	----	EYE CLOSED. SHORT ON B.
6N6	6.3	HS-5348-0	0.0	--	P4	E	950	
6N7	6.3	HS-5608-3	3.0	--	P4	D	950	TRIODE NO. 1.
6N7	6.3	HS-4308-6	3.0	--	P4	D	950	TRIODE NO. 2.
6N8	6.3	EV-2613-9	0.9	--	P4	E	1400	PENTODE SECTION.
6N8	6.3	EV-2713-9	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
6N8	6.3	EV-2813-9	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
6P5	6.3	HS-5308-0	6.2	--	P4	E	910	
6P7	6.3	CT-0458-6	5.0	--	P4	E	700	PENTODE SECTION. CAP = G.
6P7	6.3	CT-7608-4	5.0	--	P4	E	315	TRIODE SECTION.
6Q4	6.3	EV-1903-0	0.5	--	P4	B	7600	
6Q5	6.3	HS-5308-0	--	89	P5	G	----	STRIKES AT ABOUT 16 V. NOTES 2 & 3
6Q6	6.3	HS-0308-0	2.3	--	P4	E	630	TRIODE SECTION. CAP = G.
6Q6	6.3	HS-0508-0	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
6Q6	6.3	HS-0408-0	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
6Q7	6.3	HS-0308-1	2.3	--	P4	E	500	TRIODE SECTION. CAP = G.
6Q7	6.3	HS-0508-3	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
6Q7	6.3	HS-0408-3	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
6R7	6.3	HS-0308-1	4.0	--	P4	E	1200	TRIODE SECTION. CAP = G.
6R7	6.3	HS-0508-3	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
6R7	6.3	HS-0408-3	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
6R8	6.3	EV-8907-2	4.8	--	P4	E	1200	TRIODE SECTION.
6R8	6.3	EV-0107-8	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
6R8	6.3	EV-0607-8	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
6R8	6.3	EV-0203-9	0.0	0	P1	G	----	DIODE NO. 3. NOTE 3.
6S7	6.3	HS-0348-5	4.8	--	P4	E	1100	CAP = G.
6S8	6.3	HY-0602-0	0.8	--	P4	E	570	TRIODE SECTION. CAP = G.
6S8	6.3	HY-0305-0	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
6S8	6.3	HY-0402-0	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
6S8	6.3	HY-0102-0	0.0	--	P1	D	----	DIODE NO. 3. NOTE 3.
6SA7	6.3	HS-8346-5	0.0	--	--	D	760	AMPL. SECTION. HOLD DOWN P1 & PRESS P4.
6SA7	6.3	HS-5406-8	0.0	--	P4	C	2840	OSC. SECTION.
6SB7	6.3	HS-8346-5	0.0	--	--	D	1070	AMPL. SECTION. HOLD DOWN P1 & PRESS P4.
6SB7	6.3	HS-5406-8	0.0	--	P4	C	5000	OSC. SECTION.
6SC7	6.3	HY-4506-2	0.9	--	P4	D	830	TRIODE NO. 1.
6SC7	6.3	HY-3206-5	0.9	--	P4	D	830	TRIODE NO. 2.
6SD7	6.3	HS-4865-3	2.6	--	P4	D	1900	
6SF5	6.3	HY-3502-1	0.9	--	P4	D	950	
6SF7	6.3	HY-2643-1	0.9	--	P4	D	1260	PENTODE SECTION.
6SF7	6.3	HY-0543-6	0.0	--	P1	D	----	DIODE SECTION. NOTE 3.
6SG7	6.3	HS-4865-1	0.8	--	P4	C	2500	
6SH7	6.3	HS-4865-1	0.6	--	P4	C	2500	

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
6SJ7	6.3	HS-4865-3	3.3	--	P4	D	1040	
6SK7	6.3	HS-4865-3	2.0	--	P4	D	1260	
6SL7	6.3	HY-4506-2	0.4	--	P4	D	1000	TRIODE NO. 1.
6SL7	6.3	HY-1203-5	0.4	--	P4	D	1000	TRIODE NO. 2.
6SQ7	6.3	HY-2603-1	1.1	--	P4	D	700	TRIODE SECTION.
6SQ7	6.3	HY-0503-6	0.0	--	P1	D	-----	DIODE NO. 1. NOTE 3.
6SQ7	6.3	HY-0403-6	0.0	--	P1	D	-----	DIODE NO. 2. NOTE 3.
6SR7	6.3	HY-2603-1	4.5	--	P4	D	1200	TRIODE SECTION.
6SR7	6.3	HY-0503-6	0.0	--	P1	D	-----	DIODE NO. 1. NOTE 3.
6SR7	6.3	HY-0403-6	0.0	--	P1	D	-----	DIODE NO. 2. NOTE 3.
6SS7	6.3	HS-4865-3	3.3	--	P4	E	1160	
6ST7	6.3	HY-2603-1	3.5	--	P4	E	1200	TRIODE SECTION.
6ST7	6.3	HY-0503-6	0.0	--	P1	D	-----	DIODE NO. 1. NOTE 3.
6ST7	6.3	HY-0403-6	0.0	--	P1	D	-----	DIODE NO. 2. NOTE 3.
6SU7	6.3	HY-4506-2	1.0	--	P4	D	1000	TRIODE NO. 1.
6SU7	6.3	HY-1203-5	1.0	--	P4	D	1000	TRIODE NO. 2.
6SV7	6.3	HY-2643-0	1.0	--	P4	D	1640	PENTODE SECTION.
6SV7	6.3	HY-2543-0	0.0	--	P1	G	-----	DIODE SECTION. NOTE 3.
6SZ7	6.3	HY-2603-1	1.5	--	P4	D	760	TRIODE SECTION.
6SZ7	6.3	HY-0503-1	0.0	--	P1	D	-----	DIODE NO. 1. NOTE 3.
6SZ7	6.3	HY-0403-1	0.0	--	P1	D	-----	DIODE NO. 2. NOTE 3.
6T5	6.3	GR-5403-0	0.0	--	P4	G	-----	EYE OPEN. SHORT ON B.
6T5	6.3	GR-5423-0	0.0	--	P4	G	-----	EYE CLOSED. SHORT ON B.
6T7	6.3	HS-0308-0	2.3	--	P4	E	630	TRIODE SECTION. CAP = G.
6T7	6.3	HS-0508-0	0.0	--	P1	D	-----	DIODE NO. 1. NOTE 3.
6T7	6.3	HS-0408-0	0.0	--	P1	D	-----	DIODE NO. 2. NOTE 3.
6U3	6.3	EV-0903-0	0.0	91	P3	G	-----	NOTE 3.
6U4	6.3	HY-0503-0	0.0	90	P3	G	-----	NOTE 3.
6U5	6.3	GR-5403-0	0.0	--	P4	G	-----	EYE OPEN. SHORT ON B.
6U5	6.3	GR-5423-0	0.0	--	P4	G	-----	EYE CLOSED. SHORT ON B.
6U6	6.3	HS-5348-0	3.7	--	--	C	3900	HOLD DOWN P1 & PRESS P4.
6U7	6.3	HS-0348-5	3.3	--	P4	D	1000	CAP = G.
6V4	6.3	EV-0703-1	0.0	80	P3	G	-----	PLATE NO. 1. NOTE 3.
6V4	6.3	EV-0103-7	0.0	80	P3	G	-----	PLATE NO. 2. NOTE 3.
6V7	6.3	HS-0308-0	11.8	--	P4	E	610	TRIODE SECTION. CAP = G.
6V7	6.3	HS-0508-0	0.0	--	P1	D	-----	DIODE NO. 1. NOTE 3.
6V7	6.3	HS-0408-0	0.0	--	P1	D	-----	DIODE NO. 2. NOTE 3.
6V8	6.3	EV-6103-8	2.2	--	P4	D	760	TRIODE SECTION.
6V8	6.3	EV-0903-2	0.0	--	P1	D	-----	DIODE NO. 1. NOTE 3.
6V8	6.3	EV-0708-6	0.0	0	P1	G	-----	DIODE NO. 2. NOTE 3.
6V8	6.3	EV-0203-8	0.0	0	P1	G	-----	DIODE NO. 3. NOTE 3.
6W5	6.3	HS-0508-0	0.0	85	P3	G	-----	PLATE NO. 1. NOTE 3.
6W5	6.3	HS-0308-0	0.0	85	P3	G	-----	PLATE NO. 2. NOTE 3.
6W7	6.3	HS-0348-5	4.2	--	P4	D	775	CAP = G.
6Y5	6.3	GR-0504-0	0.0	91	P3	G	-----	PLATE NO. 1. NOTE 3.
6Y5	6.3	GR-0304-0	0.0	91	P3	G	-----	PLATE NO. 2. NOTE 3.
6Y6	6.3	HS-5348-0	6.5	--	--	C	3150	HOLD DOWN P1 & PRESS P4.
6Y7	6.3	HS-5608-3	1.6	--	P4	D	630	TRIODE NO. 1.
6Y7	6.3	HS-4308-6	1.6	--	P4	D	630	TRIODE NO. 2.
6Z7	6.3	HS-5608-0	0.9	--	P4	E	760	TRIODE NO. 1.
6Z7	6.3	HS-4308-0	0.9	--	P4	E	760	TRIODE NO. 2.
6ZY5	6.3	HS-0508-0	0.0	83	P3	G	-----	PLATE NO. 1. NOTE 3.
6ZY5	6.3	HS-0308-0	0.0	83	P3	G	-----	PLATE NO. 2. NOTE 3.
7A4	6.3	JR-6207-0	3.7	--	P4	D	1640	
7A5	6.3	JR-6237-0	8.7	--	P4	C	3800	
7A6	6.3	JR-0607-5	0.0	--	P1	E	-----	DIODE NO. 1. NOTE 3.
7A6	6.3	JR-0302-5	0.0	--	P1	E	-----	DIODE NO. 2. NOTE 3.
7A7	6.3	JR-6237-4	3.0	--	P4	D	1260	
7A8	6.3	JR-6257-4	0.0	--	--	E	630	AMPL. SECTION. HOLD DOWN P1 & PRESS P4.
7A8	6.3	JR-4357-6	3.0	--	--	E	315	OSC. SECTION. HOLD DOWN P1 & PRESS P4.
7AB7	6.3	HS-5314-0	1.5	--	P4	D	1150	

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT. COND.	NOTATIONS
7AD7	6.3	JR-6237-4	0.5	--	P4	C	5350	TRIODE NO. 1. TRIODE NO. 2.
7AF7	6.3	JR-5607-0	4.2	--	P4	D	1640	
7AF7	6.3	JR-4302-0	4.2	--	P4	D	1640	
7AG7	6.3	JR-6237-4	0.9	--	P4	D	1900	TRIODE SECTION. DIODE NO. 1. NOTE 3. DIODE NO. 2. NOTE 3.
7AH7	6.3	JR-6237-4	0.9	--	P4	D	2100	
7AJ7	6.3	JR-6237-4	1.5	--	P4	D	1430	
7AK7	6.3	JR-6237-4	0.1	--	P4	C	2500	
7B4	6.3	JR-6207-0	0.9	--	P4	D	950	
7B5	6.3	JR-6237-0	9.0	--	P4	E	1000	
7B6	6.3	JR-3207-0	1.3	--	P4	D	700	AMPL. SECTION. HOLD DOWN P1 & PRESS P4. OSC. SECTION. HOLD DOWN P1 & PRESS P4. DIODE. NOTE 3.
7B6	6.3	JR-0607-2	0.0	--	P1	D	----	
7B6	6.3	JR-0507-2	0.0	--	P1	D	----	
7B7	6.3	JR-6237-4	4.8	--	P4	E	1070	
7B8	6.3	JR-6257-4	0.0	--	--	E	820	
7B8	6.3	JR-4357-6	0.0	--	--	E	630	TRIODE SECTION.
7C4	6.3	JR-0407-0	0.0	--	P1	E	----	
7C5	6.3	JR-6237-0	5.0	--	P4	C	2600	
7C6	6.3	JR-3207-0	0.4	--	P4	D	570	DIODE NO. 1. NOTE 3. DIODE NO. 2. NOTE 3.
7C6	6.3	JR-0607-2	0.0	--	P1	D	----	
7C6	6.3	JR-0507-2	0.0	--	P1	D	----	
7C7	6.3	JR-6237-4	2.4	--	P4	D	820	TRIODE SECTION.
7E5	6.3	JS-1304-0	2.4	--	P4	D	1900	
7E6	6.3	JR-3207-0	4.0	--	P4	D	1200	
7E6	6.3	JR-0607-2	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3. DIODE NO. 2. NOTE 3. PENTODE SECTION.
7E6	6.3	JR-0507-2	0.0	--	P1	D	----	
7E7	6.3	JR-6257-0	3.5	--	P4	D	820	
7E7	6.3	JR-0407-2	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3. DIODE NO. 2. NOTE 3.
7E7	6.3	JR-0307-2	0.0	--	P1	D	----	
7F7	6.3	JR-5607-3	0.9	--	P4	E	820	TRIODE NO. 1. TRIODE NO. 2.
7F7	6.3	JR-4302-6	0.9	--	P4	E	820	
7F8	6.3	HS-8605-0	1.1	--	P4	C	3150	
7F8	6.3	HS-1304-0	1.1	--	P4	C	3150	TRIODE NO. 1. TRIODE NO. 2.
7G7	6.3	JR-6237-4	1.1	--	P4	D	2840	
7G8	6.3	JR-5736-2	0.4	--	P4	E	1320	TETRODE NO. 1. TETRODE NO. 2.
7G8	6.3	JR-4236-7	0.4	--	P4	E	1320	
7H7	6.3	JR-6237-4	1.5	--	P4	C	2400	
7J7	6.3	JR-6257-4	1.4	--	P4	D	500	HEPTODE SECTION. TRIODE SECTION.
7J7	6.3	JR-4307-5	3.5	--	P4	D	630	
7K7	6.3	JR-4302-0	0.9	--	P4	D	1000	TRIODE SECTION. DIODE NO. 1. NOTE 3. DIODE NO. 2. NOTE 3.
7K7	6.3	JR-0507-0	0.0	--	P1	D	----	
7K7	6.3	JR-0607-0	0.0	--	P1	D	----	
7L7	6.3	JR-6237-4	0.6	--	P4	D	1900	TRIODE NO. 1.
7N7	6.3	JR-5607-3	4.2	--	P4	D	1640	
7N7	6.3	JR-4302-6	4.2	--	P4	D	1640	TRIODE NO. 2. AMPL. SECTION. HOLD DOWN P1 & PRESS P4. OSC. SECTION. PENTODE SECTION. DIODE NO. 1. NOTE 3.
7Q7	6.3	JR-6237-4	0.0	--	--	D	630	
7Q7	6.3	JR-4307-6	0.0	--	P4	C	3460	
7R7	6.3	JR-6257-0	1.5	--	P4	D	1900	DIODE NO. 2. NOTE 3. HEPTODE SECTION. TRIODE SECTION.
7R7	6.3	JR-0407-2	0.0	--	P1	D	----	
7R7	6.3	JR-0307-2	0.0	--	P1	D	----	
7S7	6.3	JR-6257-4	3.0	--	P4	D	950	PLATE NO. 1. NOTE 3. PLATE NO. 2. NOTE 3. TRIODE SECTION. DIODE NO. 1. NOTE 3.
7S7	6.3	JR-4307-5	2.0	--	P4	D	950	
7T7	6.3	JR-6237-4	2.1	--	P4	D	1900	
7V7	6.3	JR-6237-4	1.0	--	P4	C	2500	DIODE NO. 2. NOTE 3. PLATE NO. 1. NOTE 3.
7W7	6.3	JR-6237-5	1.0	--	P4	C	2500	
7X6	6.3	JR-0607-0	0.0	90	P3	G	----	
7X6	6.3	JR-0302-0	0.0	90	P3	G	----	DIODE NO. 2. NOTE 3. PLATE NO. 1. NOTE 3.
7X7	6.3	JR-3204-0	1.1	--	P4	D	630	
7X7	6.3	JR-0504-0	0.0	0	P1	G	----	
7X7	6.3	JR-0607-0	0.0	0	P1	G	----	SEE NEXT PAGE FOR CONTINUATION
7Y4	6.3	JR-0607-0	0.0	85	P3	G	----	

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COMD.	NOTATIONS
7Y4	6.3	JR-0307-0	0.0	85	P3	G	----	PLATE NO. 2. NOTE 3.
7Z4	6.3	JR-0607-0	0.0	78	P3	G	----	PLATE NO. 1. NOTE 3.
7Z4	6.3	JR-0307-0	0.0	78	P3	G	----	PLATE NO. 2. NOTE 3.
8CY7	7.5	EV-7608-0	1.5	--	P4	D	800	TRIODE NO. 1.
8CY7	7.5	EV-2109-0	20.0	--	P4	C	3400	TRIODE NO. 2.
8HA6	7.5	EV-2761-3	0.8	--	P4	B	8200	
8HG8	7.5	EV-2893-0	0.6	--	P4	C	5400	PENTODE SECTION.
8HG8	7.5	EV-6703-0	5.4	--	P4	D	3000	TRIODE SECTION.
8JE8	7.5	EV-7986-0	1.2	--	P4	C	5300	PENTODE SECTION.
8JE8	7.5	EV-2301-0	2.4	--	P4	E	1550	TRIODE SECTION.
8JK8	7.5	EV-7608-9	2.8	--	P4	E	1450	TRIODE NO. 1.
8JK8	7.5	EV-2103-9	1.2	--	P4	C	7200	TRIODE NO. 2.
8JT8	7.5	EV-7986-0	1.6	--	P4	C	5700	PENTODE SECTION. USE 'MIN. & SUB-MIN.' SHORTS POSITION.
8JT8	7.5	EV-2301-0	2.6	--	P4	E	950	TRIODE SECTION.
8JU8	7.5	EV-0809-0	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
8JU8	7.5	EV-0708-0	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
8JU8	7.5	EV-0203-0	0.0	0	P1	G	----	DIODE NO. 3. NOTE 3.
8JU8	7.5	EV-0102-0	0.0	0	P1	G	----	DIODE NO. 4. NOTE 3.
8KS8	7.5	EV-7986-0	2.8	--	P4	C	4000	PENTODE SECTION.
8KS8	7.5	EV-2301-0	1.2	--	P4	D	2500	TRIODE SECTION.
8LE8	7.5	EV-9683-7	2.0	--	P4	E	800	PENTODE NO. 1.
8LE8	7.5	EV-9183-2	2.0	--	P4	E	800	PENTODE NO. 2.
9BR7	10.0	EV-2103-0	1.6	--	P4	D	2500	TRIODE SECTION.
9BR7	10.0	EV-0708-0	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
9BR7	10.0	EV-0608-0	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
9CL8	10.0	EV-9678-0	1.0	--	P4	D	2500	TETRODE SECTION.
9CL8	10.0	EV-1203-0	0.7	--	P4	C	5000	TRIODE SECTION.
9DZ8	10.0	EV-3672-0	6.8	--	P4	C	3400	PENTODE SECTION.
9DZ8	10.0	EV-1908-0	2.6	--	P4	E	450	TRIODE SECTION.
9U8	10.0	EV-2637-0	0.8	--	P4	D	2400	PENTODE SECTION.
9U8	10.0	EV-9108-0	1.0	--	P4	C	5350	TRIODE SECTION.
9X8	10.0	EV-7986-1	1.2	--	P4	C	2900	PENTODE SECTION.
9X8	10.0	EV-2306-1	2.0	--	P4	C	3650	TRIODE SECTION.
10	7.5	ER-3200-0	11.8	--	P4	E	790	NOTE 6.
10C8	10.0	EV-8679-0	1.0	--	P4	C	4100	PENTODE SECTION.
10C8	10.0	EV-2103-0	1.4	--	P4	D	2800	TRIODE SECTION.
10DA7	10.0	EV-7608-0	3.4	--	P4	D	1650	TRIODE NO. 1.
10DA7	10.0	EV-3109-0	15.0	--	P4	C	3700	TRIODE NO. 2.
10EB8	10.0	EV-7986-0	0.8	--	P4	C	5000	PENTODE SECTION.
10EB8	10.0	EV-2301-0	0.6	--	P4	E	1400	TRIODE SECTION.
10EW7	10.0	EV-7608-0	5.4	--	P4	E	1200	TRIODE NO. 1.
10EW7	10.0	EV-2109-0	17.0	--	P4	C	5000	TRIODE NO. 2.
10FD7	10.0	EV-7608-0	0.8	--	P4	E	1000	TRIODE NO. 1.
10FD7	10.0	EV-2109-0	3.4	--	P4	C	4700	TRIODE NO. 2.
10FR7	10.0	EV-7608-0	1.6	--	P4	D	1000	TRIODE NO. 1.
10FR7	10.0	EV-3109-0	17.0	--	P4	C	6000	TRIODE NO. 2.
10HA6	10.0	EV-2761-3	0.8	--	P4	B	8200	
11C5	10.0	ET-2761-0	1.5	--	--	C	3650	HOLD DOWN P1 & PRESS P4.
12A	5.0	ER-3200-0	14.0	--	P4	E	1040	NOTE 6.
12A4	12.6	EV-2901-0	4.8	--	P4	C	4900	
12A5	12.6	HR-4235-0	18.0	--	P4	D	1130	

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
12AD7	12.6	EV-2103-0	1.3	--	P4	D	875	TRIODE NO. 2.
12AE6	12.6	ET-0702-1	0.0	--	P1	D	----	TRIODE SECTION. OK ABOVE 800 ON 6000 SCALE. MAKE NO GAS TEST. NOTE 3.
12AE6	12.6	ET-0602-0	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
12AE6	12.6	ET-0502-0	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
12AE7	12.6	EV-0608-7	0.0	--	P1	E	----	TRIODE NO. 1. MAKE NO GAS TEST. NOTE 3.
12AE7	12.6	EV-0103-2	0.0	0	P1	G	----	TRIODE NO. 2. MAKE NO GAS TEST. NOTE 3.
12AF6	12.6	ET-1567-2	4.4	--	P4	D	725	PLATE VOLTS = LOW.
12AG6	12.6	ET-7652-1	2.0	--	P1	C	----	OK ABOVE DIODES OK. MAKE NO GAS TEST. NOTE 3.
12AH7	12.6	HY-5604-3	4.0	--	P4	D	1500	TRIODE NO. 1.
12AH7	12.6	HY-1302-6	4.0	--	P4	D	1500	TRIODE NO. 2.
12AJ6	12.6	ET-0702-1	0.0	--	P1	D	----	TRIODE SECTION. OK ABOVE 500 ON 6000 SCALE. MAKE NO GAS TEST. NOTE 3.
12AJ6	12.6	ET-0602-0	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
12AJ6	12.6	ET-0502-0	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
12AL8	12.6	EV-0367-2	0.0	15	P1	G	----	TETRODE SECTION. MAKE NO GAS TEST. NOTE 3.
12AL8	12.6	EV-0109-8	0.0	--	P1	D	----	TRIODE SECTION. OK ABOVE 600 ON 3000 SCALE. MAKE NO GAS TEST. NOTE 3.
12AS5	12.6	ET-2761-0	10.5	--	P4	C	3530	PENTODE SECTION.
12AU8	12.6	EV-7986-0	1.0	--	P4	C	4400	TRIODE SECTION.
12AU8	12.6	EV-2301-0	1.5	--	P4	C	3100	
12AV7	12.6	EV-7608-2	1.2	--	P4	C	5350	TRIODE NO. 1.
12AV7	12.6	EV-2103-7	1.2	--	P4	C	5350	TRIODE NO. 2.
12AW6	12.6	ET-1562-7	1.0	--	P4	C	3000	
12AX4	12.6	HY-0503-0	0.0	89	P3	G	----	NOTE 3.
12B7	12.6	JR-6237-4	3.0	--	P4	D	1260	
12B8	12.6	HS-0341-0	4.3	--	P4	D	1140	PENTODE SECTION. CAP = G.
12B8	12.6	HS-8506-0	0.8	--	P4	D	1260	TRIODE SECTION.
12BH7	12.6	EV-7608-2	5.2	--	P4	D	1950	TRIODE NO. 1.
12BH7	12.6	EV-2103-7	5.2	--	P4	D	1950	TRIODE NO. 2.
12BK5	12.6	EV-3186-0	0.0	--	P4	C	4700	
12BK6	12.6	ET-1702-5	0.8	--	P4	D	790	TRIODE SECTION.
12BK6	12.6	ET-0602-5	0.0	--	P1	C	----	DIODE NO. 1. NOTE 3.
12BK6	12.6	ET-0502-7	0.0	--	P1	C	----	DIODE NO. 2. NOTE 3.
12BL6	12.6	ET-2657-1	3.0	--	P1	C	----	MAKE NO GAS TEST. NOTE 3.
12BR7	12.6	EV-2103-0	1.6	--	P4	D	2500	TRIODE SECTION.
12BR7	12.6	EV-0708-0	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
12BR7	12.6	EV-0608-0	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
12BT6	12.6	ET-1702-0	2.1	--	P4	D	820	TRIODE SECTION.
12BT6	12.6	ET-1602-0	0.0	--	P1	C	----	DIODE NO. 1. NOTE 3.
12BT6	12.6	ET-1502-0	0.0	--	P1	C	----	DIODE NO. 2. NOTE 3.
12BU6	12.6	ET-1702-0	6.0	--	P4	E	950	TRIODE SECTION.
12BU6	12.6	ET-1602-0	0.0	--	P1	C	----	DIODE NO. 1. NOTE 3.
12BU6	12.6	ET-1502-0	0.0	--	P1	C	----	DIODE NO. 2. NOTE 3.
12BV7	12.6	EV-2781-3	1.6	--	P4	C	5650	
12BW4	12.6	EV-0709-1	0.0	75	P3	G	----	PLATE NO. 1. NOTE 3.
12BW4	12.6	EV-0109-7	0.0	75	P3	G	----	PLATE NO. 2. NOTE 3.
12BZ7	12.6	EV-7608-0	1.2	--	P4	D	2000	TRIODE NO. 1.
12BZ7	12.6	EV-2103-0	1.2	--	P4	D	2000	TRIODE NO. 2.
12C8	12.6	HS-0368-1	4.0	--	P4	D	725	PENTODE SECTION. CAP = G.
12C8	12.6	HS-0508-3	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
12C8	12.6	HS-0408-3	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
12CM6	12.6	EV-3917-0	3.3	--	P4	D	2600	
12CN5	12.6	ET-0671-2	0.0	--	P1	C	----	MAKE NO GAS TEST. NOTE 3.
12CT8	12.6	EV-8679-0	1.0	--	P4	C	4400	PENTODE SECTION.
12CT8	12.6	EV-2103-0	1.5	--	P4	C	3100	TRIODE SECTION.
12CX6	12.6	ET-2657-1	0.0	--	P1	C	----	MAKE NO GAS TEST. NOTE 3.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
12DE8	12.6	EV-7869-1	0.0	--	P1	D	----	PENTODE SECTION. MAKE NO GAS TEST. NOTE 3.
12DE8	12.6	EV-0302-0	0.0	0	P1	G	----	DIODE SECTION. NOTE 3.
12DF5	12.6	EV-0608-0	0.0	75	P3	G	----	PLATE NO. 1. NOTE 3.
12DF5	12.6	EV-0103-0	0.0	75	P3	G	----	PLATE NO. 2. NOTE 3.
12DF7	12.6	EV-7608-0	1.3	--	P4	D	875	TRIODE NO. 1.
12DF7	12.6	EV-2103-0	1.3	--	P4	D	875	TRIODE NO. 2.
12DK6	12.6	ET-1562-7	1.0	--	P4	C	4400	
12DK7	12.6	EV-0372-1	0.0	--	P1	E	----	TETRODE SECTION. MAKE NO GAS TEST. NOTE 3.
12DK7	12.6	EV-0602-0	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
12DK7	12.6	EV-0902-0	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
12DL8	12.6	EV-0362-7	0.0	10	P1	G	----	TETRODE SECTION. MAKE NO GAS TEST. NOTE 3.
12DL8	12.6	EV-0908-0	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
12DL8	12.6	EV-0108-0	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
12DQ4	12.6	JX-0503-0	0.0	80	P3	G	----	NOTE 3.
12DQ7	12.6	EV-2781-3	1.6	--	P4	C	5000	
12DS7	12.6	EV-7368-0	0.0	18	P1	G	----	TETRODE SECTION. MAKE NO GAS TEST. NOTE 3.
12DS7	12.6	EV-0908-0	0.0	0	P1	C	----	DIODE NO. 1. NOTE 3.
12DS7	12.6	EV-0108-0	0.0	0	P1	C	----	DIODE NO. 2. NOTE 3.
12DU7	12.6	EV-0362-1	0.0	0	P1	B	----	TETRODE SECTION. OK ABOVE 4000 ON 30000 SCALE. MAKE NO GAS TEST. NOTE 3.
12DU7	12.6	EV-0902-0	0.0	0	P1	D	----	DIODE NO. 1. OK ABOVE 1000 ON 6000 SCALE. NOTE 3.
12DU7	12.6	EV-0702-0	0.0	0	P1	D	----	DIODE NO. 2. OK ABOVE 1000 ON 6000 SCALE. NOTE 3.
12DV7	12.6	EV-0608-7	0.0	0	P1	D	----	TRIODE SECTION. OK ABOVE 800 ON 6000 SCALE. MAKE NO GAS TEST. NOTE 3.
12DV7	12.6	EV-0301-0	0.0	0	P1	D	----	DIODE NO. 1. OK ABOVE 1000 ON 6000 SCALE. NOTE 3.
12DV7	12.6	EV-0201-0	0.0	0	P1	D	----	DIODE NO. 2. OK ABOVE 1000 ON 6000 SCALE. NOTE 3.
12DV8	12.6	EV-0362-7	0.0	9	P1	G	----	TETRODE SECTION. OK ABOVE 600 ON 3000 SCALE. MAKE NO GAS TEST. NOTE 3.
12DV8	12.6	EV-0908-0	0.0	0	P1	G	----	DIODE NO. 1. OK ABOVE 250 ON 3000 SCALE. NOTE 3.
12DV8	12.6	EV-0108-0	0.0	0	P1	G	----	DIODE NO. 2. OK ABOVE 250 ON 3000 SCALE. NOTE 3.
12DW5	12.6	EV-3917-0	12.0	--	P4	C	3500	
12DW8	12.6	EV-7608-0	4.0	--	P1	C	----	TRIODE NO. 1. OK ABOVE 6000 ON 15000 SCALE. MAKE NO GAS TEST. NOTE 3.
12DW8	12.6	EV-2103-0	0.0	--	P1	B	----	TRIODE NO. 2. OK ABOVE 14000 ON 30000 SCALE. MAKE NO GAS TEST. NOTE 3.
12DW8	12.6	EV-0908-0	0.0	--	P1	B	----	DIODE SECTION. OK ABOVE 9500 ON 30000 SCALE. MAKE NO GAS TEST. NOTE 3.
12DY8	12.6	EV-0362-1	0.0	--	P1	E	----	TETRODE SECTION. MAKE NO GAS TEST. NOTE 3.
12DY8	12.6	EV-0807-9	0.0	--	P1	D	----	TRIODE SECTION. OK ABOVE 1300 ON 6000 SCALE. MAKE NO GAS TEST. NOTE 3.
12DZ6	12.6	ET-2657-1	0.0	--	P1	B	----	MAKE NO GAS TEST. NOTE 3.
12DZ8	12.6	EV-3672-0	6.8	--	P4	C	3400	PENTODE SECTION.
12DZ8	12.6	EV-1908-0	2.6	--	P4	E	450	TRIODE SECTION.
12EA6	12.6	ET-2657-1	0.0	--	P1	B	----	MAKE NO GAS TEST. NOTE 3.
12EC8	12.6	EV-0768-9	0.0	--	P1	D	----	PENTODE SECTION. MAKE NO GAS TEST. NOTE 3.
12EC8	12.6	EV-0203-1	0.0	--	P1	C	----	TRIODE SECTION. OK ABOVE 5000 ON 15000 SCALE. MAKE NO GAS TEST. NOTE 3.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
12ED5	12.6	DU-2761-0	0.0	--	--	C	5300	HOLD DOWN P1 & PRESS P4. MAKE NO GAS TEST. NOTE 3.
12EG6	12.6	ET-7652-1	0.0	--	P1	B	----	
12EH5	12.6	ET-2761-0	1.2	--	P4	C	6300	
12EK6	12.6	ET-2657-1	0.0	--	P1	B	----	
12EL6	12.6	ET-0207-1	0.0	--	P1	F	----	
12EL6	12.6	ET-0607-0	0.0	--	P1	D	----	DIODE NO. 1. OK ABOVE 1200 ON 6000 SCALE. NOTE 3. DIODE NO. 2. OK ABOVE 1200 ON 6000 SCALE. NOTE 3. TETRODE SECTION. MAKE NO GAS TEST. NOTE 3. DIODE SECTION. NOTE 3.
12EL6	12.6	ET-0507-0	0.0	--	P1	D	----	
12EM6	12.6	EV-0362-1	0.0	--	P1	E	----	
12EM6	12.6	EV-0902-0	0.0	--	P1	D	----	
12EN6	12.6	HS-5348-0	11.0	--	P4	C	3500	
12EQ7	12.6	EV-2763-1	2.6	--	P4	E	850	PENTODE SECTION. DIODE SECTION. NOTE 3. OK ABOVE 1500 ON 3000 SCALE. MAKE NO GAS TEST. NOTE 3. CAP = G. PENTODE SECTION. OK ABOVE 1000 ON 6000 SCALE. MAKE NO GAS TEST. NOTE 3.
12EQ7	12.6	EV-0803-0	0.0	--	P1	D	----	
12EZ6	12.6	ET-2657-1	0.0	--	P1	C	----	
12F5	12.6	HS-0408-0	0.9	--	P4	D	950	
12F8	12.6	EV-9237-8	3.0	--	P1	D	----	
12F8	12.6	EV-0607-0	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3. DIODE NO. 2. NOTE 3. TRIODE SECTION. MAKE NO GAS TEST. NOTE 3. DIODE NO. 1. NOTE 3. DIODE NO. 2. NOTE 3.
12F8	12.6	EV-0107-0	0.0	--	P1	D	----	
12FK6	12.6	ET-1702-0	0.4	--	P1	D	----	
12FK6	12.6	ET-0602-0	0.0	--	P1	D	----	
12FK6	12.6	ET-0502-0	0.0	--	P1	D	----	
12FM6	12.6	ET-0702-1	0.0	--	P1	D	----	TRIODE SECTION. OK ABOVE 2000 ON 6000 SCALE. MAKE NO GAS TEST. NOTE 3. DIODE NO. 1. NOTE 3. DIODE NO. 2. NOTE 3. PENTODE SECTION. MAKE NO GAS TEST. NOTES 3 & 6. TRIODE SECTION. MAKE NO GAS TEST. NOTE 3.
12FM6	12.6	ET-0602-0	0.0	--	P1	D	----	
12FM6	12.6	ET-0502-0	0.0	--	P1	D	----	
12FR8	12.6	EV-3670-0	2.0	21	P1	G	----	
12FR8	12.6	EV-1902-0	3.0	--	P1	F	----	
12FR8	12.6	EV-0802-0	0.0	--	P1	D	----	DIODE SECTION. SHORT ON 1 & 2. NOTE 3. TRIODE SECTION. OK ABOVE 2100 ON 6000 SCALE. MAKE NO GAS TEST. NOTE 3. DIODE NO. 1. MAKE NO GAS TEST. NOTE 3. DIODE NO. 2. MAKE NO GAS TEST. NOTE 3. TRIODE NO. 1.
12FT6	12.6	ET-1702-0	0.0	--	P1	D	----	
12FT6	12.6	ET-0602-0	0.0	--	P1	C	----	
12FT6	12.6	ET-0502-0	0.0	--	P1	C	----	
12FV7	12.6	EV-7608-0	4.1	--	P4	C	5500	
12FV7	12.6	EV-2103-0	4.1	--	P4	C	5500	TRIODE NO. 2. HEPTODE SECTION. MAKE NO GAS TEST. NOTE 3. TRIODE SECTION. MAKE NO GAS TEST. NOTES 3 & 6. TRIODE NO. 1. MAKE NO GAS TEST. NOTE 3. TRIODE NO. 2. MAKE NO GAS TEST. NOTE 3. MAKE NO GAS TEST. NOTE 3. DIODE NO. 1. NOTE 3. DIODE NO. 2. NOTE 3.
12FX8	12.6	EV-9137-2	6.0	--	P1	C	----	
12FX8	12.6	EV-6800-0	6.0	--	P1	E	----	
12G4	12.6	ET-6107-0	3.7	--	P4	D	1540	
12G8	12.6	EV-0607-8	0.0	--	P1	E	----	
12G8	12.6	EV-0102-3	0.0	--	P1	C	----	TRIODE NO. 2. MAKE NO GAS TEST. NOTE 3. MAKE NO GAS TEST. NOTE 3. DIODE NO. 1. NOTE 3. DIODE NO. 2. NOTE 3.
12GA6	12.6	ET-7652-1	2.0	--	P1	D	----	
12H6	12.6	HS-0508-1	0.0	0	P1	G	----	
12H6	12.6	HS-0304-1	0.0	0	P1	G	----	
12J5	12.6	HS-5308-1	3.7	--	P4	D	1640	
12J7	12.6	HS-0348-5	4.0	--	P4	E	770	CAP = G. TETRODE SECTION. MAKE NO GAS TEST. NOTE 3. DIODE NO. 1. NOTE 3. DIODE NO. 2. NOTE 3.
12J8	12.6	EV-0362-1	0.0	--	P1	E	----	
12J8	12.6	EV-0907-0	0.0	0	P1	G	----	
12J8	12.6	EV-0807-0	0.0	0	P1	G	----	
12J8	12.6	EV-0807-0	0.0	0	P1	G	----	

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
12K7	12.6	HS-0348-5	2.8	--	P4	E	910	CAP = G.
12K8	12.6	HS-5348-6	1.1	--	P4	D	630	HEXODE SECTION. CAP = G.
12K8	12.6	HS-5608-4	2.0	--	P4	D	1900	TRIODE SECTION.
12KL8	12.6	EV-2763-1	0.0	--	--	D	1950	PENTODE SECTION. HOLD DOWN P1 & PRESS P4.
12KL8	12.6	EV-0803-0	0.0	--	P1	D	----	DIODE SECTION. NOTE 3.
12L6	12.6	HS-5348-0	1.5	--	--	C	5650	HOLD DOWN P1 & PRESS P4.
12L8	12.6	HW-1852-3	3.0	--	P4	D	1350	PENTODE NO. 1.
12L8	12.6	HW-3452-1	3.0	--	P4	D	1350	PENTODE NO. 2.
12Q7	12.6	HS-0308-0	2.3	--	P4	E	500	TRIODE SECTION. CAP = G.
12Q7	12.6	HS-0508-3	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
12Q7	12.6	HS-0408-3	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
12R5	12.6	ET-2761-0	2.0	--	--	C	4400	HOLD DOWN P1 & PRESS P4.
12S8	12.6	HY-0602-0	0.8	--	P4	E	570	TRIODE SECTION. CAP = G.
12S8	12.6	HY-0305-0	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
12S8	12.6	HY-0402-0	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
12S8	12.6	HY-0102-0	0.0	--	P1	D	----	DIODE NO. 3. NOTE 3.
12SA7	12.6	HS-8346-5	0.0	--	--	D	760	AMPL. SECTION. HOLD DOWN P1 & PRESS P4.
12SA7	12.6	HS-5406-8	0.0	--	P4	C	2840	OSC. SECTION.
12SC7	12.6	HY-4506-2	0.9	--	P4	D	830	TRIODE NO. 1.
12SC7	12.6	HY-3206-5	0.9	--	P4	D	830	TRIODE NO. 2.
12SF5	12.6	HY-3502-0	0.9	--	P4	D	950	
12SF7	12.6	HY-2643-1	0.9	--	P4	D	1260	PENTODE SECTION.
12SF7	12.6	HY-0503-6	0.0	--	P1	D	----	DIODE SECTION. NOTE 3.
12SG7	12.6	HS-4865-1	0.8	--	P4	C	2500	
12SH7	12.6	HS-4865-1	0.6	--	P4	C	2500	
12SJ7	12.6	HS-4865-3	3.3	--	P4	D	1040	
12SK7	12.6	HS-4865-3	2.0	--	P4	D	1260	
12SL7	12.6	HY-4506-2	0.4	--	P4	D	1000	TRIODE NO. 1.
12SL7	12.6	HY-1203-5	0.4	--	P4	D	1000	TRIODE NO. 2.
12SQ7	12.6	HY-2603-1	1.1	--	P4	D	700	TRIODE SECTION.
12SQ7	12.6	HY-0503-6	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
12SQ7	12.6	HY-0403-6	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
12SR7	12.6	HY-2603-1	4.5	--	P4	D	1200	TRIODE SECTION.
12SR7	12.6	HY-0503-6	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
12SR7	12.6	HY-0403-6	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
12SW7	12.6	HY-2603-1	4.5	--	P4	D	1200	TRIODE SECTION.
12SW7	12.6	HY-0503-6	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
12SW7	12.6	HY-0403-6	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
12SX7	12.6	HY-4506-2	3.7	--	P4	D	1640	TRIODE NO. 1.
12SX7	12.6	HY-1203-5	3.7	--	P4	D	1640	TRIODE NO. 2.
12SY7	12.6	HS-8346-5	0.0	--	--	D	760	AMPL. SECTION. HOLD DOWN P1 & PRESS P4.
12SY7	12.6	HS-5406-8	0.0	--	P4	C	2840	OSC. SECTION.
12U7	12.6	EV-0608-7	0.0	--	P1	D	----	TRIODE NO. 1. OK ABOVE 900 ON 6000 SCALE. MAKE NO GAS TEST. NOTE 3.
12U7	12.6	EV-0103-2	0.0	--	P1	D	----	TRIODE NO. 2. OK ABOVE 900 ON 6000 SCALE. MAKE NO GAS TEST. NOTE 3.
12Z3	12.6	ER-0203-0	0.0	88	P3	G	----	NOTE 3.
13FR7	12.6	EV-7608-0	1.6	--	P4	D	1000	TRIODE NO. 1.
13FR7	12.6	EV-3109-0	17.0	--	P4	C	6000	TRIODE NO. 2.
14A4	12.6	JR-6207-0	3.7	--	P4	D	1640	
14A5	12.6	JR-6237-0	1.3	--	P4	D	1900	
14A7	12.6	JR-6237-4	3.0	--	P4	D	1260	
14AF7	12.6	JR-5607-0	4.2	--	P4	D	1640	TRIODE NO. 1.
14AF7	12.6	JR-4302-0	4.2	--	P4	D	1640	TRIODE NO. 2.
14B6	12.6	JR-3207-0	1.3	--	P4	D	700	TRIODE SECTION.
14B6	12.6	JR-0607-2	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
14B6	12.6	JR-0507-2	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
14B8	12.6	JR-6257-4	0.0	--	--	E	820	AMPL. SECTION. HOLD DOWN P1 & PRESS P4.
14B8	12.6	JR-4357-6	0.0	--	--	E	725	OSC. SECTION. HOLD DOWN P1 & PRESS P4.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
14C5	12.6	JR-6237-0	5.0	--	P4	C	2600	TRIODE SECTION. DIODE NO. 1. NOTE 3.
14C7	12.6	JR-6237-4	1.1	--	P4	D	1430	
14E6	12.6	JR-3207-0	4.0	--	P4	D	1200	
14E6	12.6	JR-0607-2	0.0	--	P1	D	----	
14E6	12.6	JR-0507-2	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3. PENTODE SECTION. DIODE NO. 1. NOTE 3. DIODE NO. 2. NOTE 3. TRIODE NO. 1.
14E7	12.6	JR-6257-0	3.5	--	P4	D	820	
14E7	12.6	JR-0407-2	0.0	--	P1	D	----	
14E7	12.6	JR-0307-2	0.0	--	P1	D	----	
14F7	12.6	JR-5607-3	0.9	--	P4	E	820	TRIODE NO. 2. TRIODE NO. 1. TRIODE NO. 2. HEPTODE SECTION.
14F7	12.6	JR-4302-6	0.9	--	P4	E	820	
14F8	12.6	HS-8605-0	1.1	--	P4	C	3150	
14F8	12.6	HS-1304-0	1.1	--	P4	C	3150	
14H7	12.6	JR-6237-4	1.5	--	P4	C	2400	TRIODE SECTION. TRIODE NO. 1. TRIODE NO. 2. AMPL. SECTION. HOLD DOWN P1 & PRESS P4. OSC. SECTION.
14J7	12.6	JR-6257-4	1.4	--	P4	D	500	
14J7	12.6	JR-4307-5	3.5	--	P4	D	630	
14N7	12.6	JR-5607-3	4.2	--	P4	D	1640	
14N7	12.6	JR-4302-6	4.2	--	P4	D	1640	DIODE NO. 1. NOTE 3. DIODE NO. 2. NOTE 3. HEPTODE SECTION. TRIODE SECTION.
14Q7	12.6	JR-6237-4	0.0	--	--	D	630	
14Q7	12.6	JR-4307-6	0.0	--	P4	C	3460	
14R7	12.6	JR-6257-0	1.5	--	P4	D	1900	
14R7	12.6	JR-0407-2	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3. DIODE NO. 2. NOTE 3. HEPTODE SECTION. TRIODE SECTION.
14R7	12.6	JR-0307-2	0.0	--	P1	D	----	
14S7	12.6	JR-6257-4	3.0	--	P4	D	950	
14S7	12.6	JR-4307-5	2.0	--	P4	D	950	
14V7	12.6	JR-6237-4	1.0	--	P4	C	2500	TRIODE SECTION. DIODE NO. 1. NOTE 3. DIODE NO. 2. NOTE 3.
14W7	12.6	JR-6237-5	1.0	--	P4	C	2500	
14X7	12.6	JR-3204-0	1.1	--	P4	D	630	
14X7	12.6	JR-0504-0	0.0	0	P1	G	----	
14X7	12.6	JR-0607-0	0.0	0	P1	G	----	PLATE NO. 1. NOTE 3. PLATE NO. 2. NOTE 3. NOTE 3. CAP = G. HOLD DOWN P1 & PRESS P4.
14Y4	12.6	JR-0607-0	0.0	83	P3	G	----	
14Y4	12.6	JR-0307-0	0.0	83	P3	G	----	
14Z3	12.6	ER-0203-0	0.0	88	P3	G	----	
15	2.0	FR-0234-0	0.0	--	--	--	440	TRIODE NO. 1. SET 'POWER ADJUST' TO 115 VOLTS. TRIODE NO. 2. KEEP POWER ADJUSTED AT 112 VOLTS. KEEP POWER ADJUSTED AT 80 VOLTS. KEEP POWER ADJUSTED AT 80 VOLTS.
15A6	12.6	EV-2713-6	1.0	--	P4	C	6300	
15EA7	12.6	JX-4506-0	3.2	--	P4	E	410	
15EA7	12.6	JX-1203-0	18.0	--	P4	C	6000	
15EW6	12.6	ET-1562-7	1.0	--	P4	C	7600	NOTE 3. PENTODE SECTION. SET 'POWER ADJUST' AT 80 VOLTS. TRIODE SECTION. TRIODE NO. 1. SET 'POWER ADJUST' AT 80 VOLTS. TRIODE NO. 2.
17AV5	20.0	HS-1583-0	6.0	--	P4	C	3450	
17CA5	20.0	ET-2761-0	1.5	--	P4	C	3150	
17DQ4	20.0	JX-0503-0	0.0	80	P3	G	----	
17HC8	20.0	EV-3672-0	2.6	--	P4	D	3200	HOLD DOWN P1 & PRESS P4. KEEP POWER ADJUSTED AT 80 VOLTS. KEEP POWER ADJUSTED AT 80 VOLTS. HOLD DOWN P1 & PRESS P4. PENTODE SECTION. SET CATH. ACT. SWITCH TO TEST POSITION. TRIODE SECTION. SET CATH. ACT. SWITCH TO TEST POSITION. PENTODE SECTION. SET CATH. ACT. SWITCH TO TEST POSITION.
17HC8	20.0	EV-1908-0	0.6	--	P4	E	1250	
17JK8	20.0	EV-7608-9	2.8	--	P4	E	1450	
17JK8	20.0	EV-2103-9	1.2	--	P4	C	7200	
17L6	20.0	HS-5348-0	1.0	--	--	C	3800	TRIODE SECTION. SET CATH. ACT. SWITCH TO TEST POSITION. TRIODE NO. 1. TRIODE NO. 2. CAP = P. TRIODE SECTION.
17R5	20.0	ET-2761-0	2.0	--	--	C	3150	
18DZ8	20.0	EV-3672-0	6.8	--	P4	C	3400	
18DZ8	20.0	EV-1908-0	2.6	--	P4	E	450	
18HB8	20.0	EV-9768-0	6.0	--	P4	D	2700	SEE NEXT PAGE FOR CONTINUATION
18HB8	20.0	EV-1302-0	1.4	--	P4	D	2300	
19	2.0	GR-4500-0	4.8	--	P4	E	630	
19	2.0	GR-3200-0	4.8	--	P4	E	630	
19BG6	20.0	HS-5083-0	4.5	--	P4	C	3800	
19C8	20.0	EV-8907-0	1.7	--	P4	D	790	

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
19C8	20.0	EV-8607-0	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
19C8	20.0	EV-8203-0	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
19C8	20.0	EV-8107-0	0.0	0	P1	G	----	DIODE NO. 3. NOTE 3.
19DE7	20.0	EV-7608-0	5.0	--	P4	E	1260	TRIODE NO. 1.
19DE7	20.0	EV-2109-0	19.0	--	P4	C	3800	TRIODE NO. 2.
19J6	20.0	ET-5207-6	1.8	--	P4	C	3340	TRIODE NO. 1.
19J6	20.0	ET-6107-5	1.8	--	P4	C	3340	TRIODE NO. 2.
19T8	20.0	EV-8907-6	1.3	--	P4	E	750	TRIODE SECTION.
19T8	20.0	EV-0607-1	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
19T8	20.0	EV-0203-7	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
19T8	20.0	EV-0107-8	0.0	0	P1	G	----	DIODE NO. 3. NOTE 3.
19V8	20.0	EV-6103-8	2.2	--	P4	D	760	TRIODE SECTION.
19V8	20.0	EV-0903-2	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
19V8	20.0	EV-0708-6	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
19V8	20.0	EV-0203-8	0.0	0	P1	G	----	DIODE NO. 3. NOTE 3.
19X3	20.0	EV-0903-0	0.0	91	P3	G	----	NOTE 3.
19Y3	20.0	EV-0903-0	0.0	91	P3	G	----	NOTE 3.
20EQ7	20.0	EV-2763-1	2.6	--	P4	E	850	PENTODE SECTION.
20EQ7	20.0	EV-0803-0	0.0	--	P1	D	----	DIODE SECTION. NOTE 3.
21A6	20.0	EV-2083-9	13.0	--	P4	C	3800	CAP = P.
21EX6	20.0	HS-5083-0	18.0	--	P4	C	4400	CAP = P. TUBES INDICATING SHORTS# RE-TEST USING HS-5013-0.
22	3.0	ER-0230-0	3.7	--	--	E	315	CAP = G. HOLD DOWN P1 & PRESS P4.
24A	2.5	FR-0234-0	6.0	--	P4	D	630	CAP = G.
25A6	25.0	HS-5348-0	11.4	--	P4	D	1450	
25A7	25.0	HS-5348-6	13.0	--	P4	D	1130	PENTODE SECTION.
25A7	25.0	HS-0601-3	0.0	89	P3	G	----	RECT. SECTION. NOTE 3.
25AC5	25.0	HS-5308-0	0.9	--	P4	D	950	
25B5	25.0	GR-4235-0	0.0	--	P4	E	1570	
25B6	25.0	HS-5348-0	17.0	--	P4	D	2500	
25B8	25.0	HS-0341-0	3.5	--	P4	E	1260	PENTODE SECTION. CAP = G.
25B8	25.0	HS-8506-0	0.9	--	P4	E	950	TRIODE SECTION.
25C6	25.0	HS-5348-0	6.5	--	--	C	3150	HOLD DOWN P1 & PRESS P4.
25CU6	25.0	HS-5048-0	12.0	--	P4	C	3500	CAP = P.
25D8	25.0	HS-0341-0	3.0	--	P4	D	1200	PENTODE SECTION. CAP = G.
25D8	25.0	HS-5601-0	1.1	--	P4	D	700	TRIODE SECTION.
25D8	25.0	HS-5801-0	0.0	--	P1	C	----	DIODE SECTION. NOTE 3.
25DK4	25.0	ET-0507-0	0.0	90	P3	G	----	NOTE 3.
25DQ6	25.0	HS-5048-0	0.0	--	P4	C	5000	CAP = P. PLATE VOLTS = LOW.
25DT5	25.0	EV-3917-0	4.4	--	P4	C	3450	
25N6	25.0	HS-5348-0	2.5	--	P4	D	1570	
25W6	25.0	HS-5348-0	1.5	--	--	C	5650	HOLD DOWN P1 & PRESS P4.
25Y5	25.0	GR-0504-0	0.0	85	P3	G	----	PLATE NO. 1. NOTE 3.
25Y5	25.0	GR-0203-0	0.0	85	P3	G	----	PLATE NO. 2. NOTE 3.
25Z5	25.0	GR-0504-0	0.0	89	P3	G	----	PLATE NO. 1. NOTE 3.
25Z5	25.0	GR-0203-0	0.0	89	P3	G	----	PLATE NO. 2. NOTE 3.
25Z6	25.0	HS-0508-1	0.0	90	P3	G	----	PLATE NO. 1. NOTE 3.
25Z6	25.0	HS-0304-1	0.0	90	P3	G	----	PLATE NO. 2. NOTE 3.
26A6	25.0	ET-1567-2	1.2	--	P4	D	2500	
26	1.4	ER-3200-0	10.2	--	P4	E	725	NOTE 6.
26A7	25.0	HW-1852-3	2.0	--	P4	C	3450	PENTODE NO. 1. PLATE VOLTS = LOW.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
26Z5W	25.0	EV-0103-0	0.0	88	P3	G	----	PLATE NO. 2. NOTE 3.
27	2.5	FR-3204-0	11.0	--	P4	C	630	
30	2.0	ER-3200-0	10.2	--	P4	E	570	NOTE 6.
31	2.0	ER-3200-0	11.4	--	P4	E	580	NOTE 6.
32	2.0	ER-0230-0	3.0	--	--	E	400	CAP = G. HOLD DOWN P1 & PRESS P4.
32L7	35.0	HS-5348-0	10.0	--	P4	D	3000	NOTE 6.
32L7	35.0	HS-0601-3	0.0	89	P3	G	----	AMPL. SECTION.
33	2.0	FR-3240-0	7.3	--	P4	E	900	RECT. SECTION. NOTE 3.
RK33	6.3	HR-4506-0	7.5	--	P4	E	870	NOTE 6.
								TRIODE NO. 1.
RK33	6.3	HR-0302-0	7.5	--	P4	E	870	TRIODE NO. 2. CAP = G.
34	2.0	ER-0230-0	2.1	--	--	E	380	CAP = G. HOLD DOWN P1 & PRESS P4.
								NOTE 6.
35	2.5	FR-0234-0	4.0	--	P4	E	650	CAP = G.
35A5	35.0	JR-6237-0	1.5	--	--	C	3650	HOLD DOWN P1 & PRESS P4.
35CD6	35.0	HS-5083-0	18.0	--	P4	C	4100	CAP = P.
350Z8	35.0	EV-3672-0	6.8	--	P4	C	3400	PENTODE SECTION.
350Z8	35.0	EV-1908-0	2.6	--	P4	E	450	TRIODE SECTION.
35Y4	BLST	JR-0247-0	--	--	--	-	----	SHORT ON 1-2-3-5 & A-C.
35Y4	35.0	JR-0207-0	0.0	91	P3	G	----	RECT. SECTION. NOTE 3.
35Z3	35.0	JR-0207-0	0.0	91	P3	G	----	NOTE 3.
35Z4	35.0	HS-0508-0	0.0	91	P3	G	----	NOTE 3.
35Z6	35.0	HS-0508-0	0.0	91	P3	G	----	PLATE NO. 1. NOTE 3.
35Z6	35.0	HS-0304-0	0.0	91	P3	G	----	PLATE NO. 2. NOTE 3.
36	6.3	FR-0234-0	4.0	--	P4	D	660	CAP = G.
37	6.3	FR-3204-0	10.6	--	P4	E	570	
38	6.3	FR-0234-0	8.7	--	P4	E	660	CAP = G.
39/44	6.3	FR-0234-0	5.0	--	P4	E	630	CAP = G.
40	5.0	ER-3200-0	3.0	--	P4	F	125	NOTE 6.
40Z5	BLST	HS-0538-0	--	--	--	-	----	SHORT ON 1-2-3-5 & A-C.
40Z5	50.0	HS-0508-0	0.0	91	P3	G	----	RECT. SECTION. NOTE 3.
41	6.3	GR-4235-0	9.0	--	P4	E	1000	
42	6.3	GR-4235-0	1.7	--	P4	D	1640	
43	25.0	GR-4235-0	14.0	--	P4	D	1450	
45	2.5	ER-3200-0	18.0	--	P4	E	1170	NOTE 6.
45Z3	50.0	HR-0204-0	0.0	90	P3	G	----	NOTE 3.
45Z5	BLST	HS-0538-0	--	--	--	-	----	SHORT ON 1-2-3-5 & A-C.
45Z5	50.0	HS-0508-0	0.0	91	P3	G	----	RECT. SECTION. NOTE 3.
46	2.5	FR-3240-0	5.6	--	P4	E	1250	NOTE 6.
47	2.5	FR-3240-0	3.5	--	P4	E	1250	NOTE 6.
48	25.0	GR-4235-0	25.0	--	P4	D	1260	
49	2.0	FR-3240-0	12.6	--	P4	E	710	NOTE 6.
50	7.5	ER-3200-0	24.0	--	P4	E	950	NOTE 6.
50A5	50.0	JR-6237-0	1.5	--	--	C	5650	HOLD DOWN P1 & PRESS P4.
50B5	50.0	ET-1562-0	1.5	--	--	C	5650	HOLD DOWN P1 & PRESS P4.
50BK5	50.0	EV-3186-0	0.0	--	P4	C	4700	
50C6	50.0	HS-5348-1	6.5	--	--	C	3150	HOLD DOWN P1 & PRESS P4.
50CA5	50.0	DU-2761-0	0.0	--	--	C	5300	HOLD DOWN P1 & PRESS P4.
50FA5	50.0	ET-2761-0	9.8	--	P4	D	2950	
50FY8	50.0	EV-3672-0	10.0	--	P4	C	3400	PENTODE SECTION.
50FY8	50.0	EV-1908-0	3.0	--	P4	E	940	TRIODE SECTION.
50L6	50.0	HS-5348-0	1.5	--	--	C	5650	HOLD DOWN P1 & PRESS P4.
50X6	50.0	JR-0607-5	0.0	89	P3	G	----	PLATE NO. 1. NOTE 3.
50X6	50.0	JR-0302-5	0.0	89	P3	G	----	PLATE NO. 2. NOTE 3.
50Y6	50.0	HS-0508-0	0.0	89	P3	G	----	PLATE NO. 1. NOTE 3.
50Y6	50.0	HS-0304-0	0.0	89	P3	G	----	PLATE NO. 2. NOTE 3.
50Y7	BLST	HS-0060-0	--	--	--	-	----	SHORT ON 1-2-3-5 & A-C.
50Y7	50.0	HS-0508-0	0.0	89	P3	G	----	PLATE NO. 1. NOTE 3.
50Y7	50.0	HS-0304-0	0.0	89	P3	G	----	PLATE NO. 2. NOTE 3.
50Z7	BLST	HS-0060-0	--	--	--	-	----	SHORT ON 1-2-3-5 & A-C.
50Z7	50.0	HS-0508-0	0.0	89	P3	G	----	PLATE NO. 1. NOTE 3.
50Z7	50.0	HS-0304-0	0.0	89	P3	G	----	PLATE NO. 2. NOTE 3.
51/51S	2.5	FR-0234-0	4.0	--	P4	E	640	CAP = G.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
52	6.3	FR-3240-0	4.2	--	P4	E	1500	NOTE 6.
53	2.5	HR-5604-2	2.3	--	P4	E	950	TRIODE NO. 1.
53	2.5	HR-3204-6	2.3	--	P4	E	950	TRIODE NO. 2.
55	2.5	GR-0205-0	12.5	--	P4	E	610	TRIODE SECTION. CAP = G.
55	2.5	GR-0405-0	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
55	2.5	GR-0305-0	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
56	2.5	FR-3204-0	6.2	--	P4	E	920	
57	2.5	GR-0235-4	3.7	--	P4	E	770	CAP = G.
57A	6.3	GR-0235-4	3.3	--	P4	E	770	CAP = G.
58	2.5	GR-0235-4	4.0	--	P4	E	900	CAP = G.
58A/58AS	6.3	GR-0235-4	4.0	--	P4	E	900	CAP = G.
59	2.5	HR-4236-5	3.5	--	P4	D	1260	
VT67	2.0	ER-3200-0	9.1	--	P4	E	570	NOTE 6.
HY69	6.3	FR-3024-0	0.0	--	P4	C	3150	CAP = P. NOTE 6.
70L7	75.0	HS-5346-0	1.5	--	--	C	4400	PENTODE SECTION. HOLD DOWN P1 & PRESS P4.
70L7	75.0	HS-0801-3	0.0	91	P3	G	----	RECT. SECTION. NOTE 3.
71A	5.0	ER-3200-0	25.0	--	P4	E	1040	NOTE 6.
75	6.3	GR-0205-0	1.1	--	P4	E	470	TRIODE SECTION. CAP = G.
75	6.3	GR-0405-2	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
75	6.3	GR-0305-2	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
76	6.3	FR-3204-0	6.2	--	P4	E	920	
77	6.3	GR-0235-4	3.3	--	P4	E	770	CAP = G.
78	6.3	GR-0235-4	4.0	--	P4	E	900	CAP = G.
79	6.3	GR-0504-0	1.6	--	P4	D	630	TRIODE NO. 1. CAP = G.
79	6.3	GR-3204-0	1.6	--	P4	D	630	TRIODE NO. 2.
81	7.5	ER-0200-0	0.0	50	P3	G	----	NOTES 3 & 6.
82	2.5	ER-0300-0	0.0	91	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
82	2.5	ER-0200-0	0.0	91	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
83V	5.0	ER-0300-0	0.0	89	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
83V	5.0	ER-0200-0	0.0	89	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
84	6.3	FR-0304-0	0.0	88	P3	G	----	PLATE NO. 1. NOTE 3.
84	6.3	FR-0204-0	0.0	88	P3	G	----	PLATE NO. 2. NOTE 3.
85	6.3	GR-0205-0	10.2	--	P4	E	620	TRIODE SECTION. CAP = G.
85	6.3	GR-0405-2	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
85	6.3	GR-0305-2	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
85AS	6.3	GR-0205-0	4.0	--	P4	E	800	TRIODE SECTION. CAP = G.
85AS	6.3	GR-0405-2	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
85AS	6.3	GR-0305-2	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
89/89Y	6.3	GR-0235-4	6.2	--	P4	E	980	CAP = G.
99	3.0	ER-3200-0	3.0	--	P4	F	270	NOTE 6.
112A	5.0	ER-3200-0	14.0	--	P4	E	1040	NOTE 6.
HY114	1.4	HS-0000-0	5.0	--	P4	E	700	RIGHT-CAP = P. LEFT CAP = G.
117L7/M7	117.0	HS-4358-0	7.6	--	P4	D	2500	NOTE 6.
117L7/M7	117.0	HS-0601-0	0.0	91	P3	G	----	PENTODE SECTION.
117N7	117.0	HS-4356-0	7.6	--	P4	D	2500	RECT. SECTION. NOTE 3.
117N7	117.0	HS-0800-0	0.0	92	P3	G	----	PENTODE SECTION.
117P7	117.0	HS-4356-0	7.6	--	P4	D	2500	RECT. SECTION. SHORT ON D. REVERSE METER. NOTE 3.
117P7	117.0	HS-0800-0	0.0	92	P3	G	----	PENTODE SECTION.
117Z3	117.0	ET-0506-0	0.0	91	P3	G	----	RECT. SECTION. SHORT ON D. REVERSE METER. NOTE 3.
117Z4	117.0	HS-0508-0	0.0	91	P3	G	----	NOTE 3.
117Z6	117.0	HS-0508-0	0.0	91	P3	G	----	NOTE 3.
117Z6	117.0	HS-0304-0	0.0	91	P3	G	----	PLATE NO. 1. NOTE 3.
X-155	6.3	EV-7608-9	2.2	--	P4	C	2500	PLATE NO. 2. NOTE 3.
X-155	6.3	EV-2103-9	2.2	--	P4	C	2500	TRIODE NO. 1.
GL502A	6.3	HS-5308-6	--	89	P5	G	----	TRIODE NO. 2.
CK502AX	1.1	DV-4120-0	2.5	--	P4	D	350	STRIKES AT ABOUT 2 V. NOTES 2 & 3.
CK503AX	1.1	DV-4120-0	3.0	--	P4	D	350	PLATE VOLTS = LOW. NOTE 6.
CK505AX	0.6	DV-4120-0	2.7	--	P4	F	110	PLATE VOLTS = LOW. NOTE 6.
CK506AX	1.1	DV-4120-0	7.5	--	P4	D	315	NOTE 6.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT. COND.	NOTATIONS
CK510AX	0.6	EX-1230-6	0.0	--	P5	F	----	SECTION NO. 1. OK ABOVE 50 ON 600 SCALE. NOTES 3 & 6.
CK510AX	0.6	EX-6530-1	0.0	--	P5	F	----	SECTION NO. 2. OK ABOVE 50 ON 600 SCALE. NOTES 3 & 6.
CK512AX	0.6	DV-4120-0	6.0	--	P4	F	100	NOTE 6.
CK518AX	1.1	DV-4120-0	3.5	--	P4	D	350	PLATE VOLTS = LOW. NOTE 6.
CK522AX	1.1	DV-4120-0	3.2	--	P4	F	280	NOTE 6.
CK523AX	1.1	DV-4120-0	5.5	--	P4	F	230	NOTE 6.
CK524AX	1.1	DV-4120-0	12.5	--	P4	F	190	NOTE 6.
CK525AX	1.1	DV-4120-0	5.9	--	P4	F	200	NOTE 6.
CK526AX	1.1	DV-4120-0	7.6	--	P4	F	250	NOTE 6.
CK527AX	1.1	DV-4120-0	2.3	--	P4	F	140	NOTE 6.
CK528AX	1.1	DV-4120-0	2.6	--	P4	F	280	NOTE 6.
CK529AX	1.1	DV-4120-0	9.6	--	P4	F	220	NOTE 6.
CK533AX	1.1	DV-4120-0	4.2	--	P4	F	250	NOTE 6.
CK535AX	1.1	DV-4120-0	9.6	--	P4	F	220	NOTE 6.
CK536AX	1.1	DV-4120-0	4.2	--	P4	F	250	NOTE 6.
CK541DX	1.1	DV-4120-0	3.0	--	P4	F	160	NOTE 6.
CK542DX	1.1	DV-4120-0	8.0	--	P4	F	200	NOTE 6.
CK543DX	0.6	DV-4210-0	0.0	--	P1	F	----	NOTES 3 & 6.
CK544DX	1.1	DV-4120-0	2.0	--	P4	F	200	NOTE 6.
CK546DX	1.4	DV-4120-0	3.2	--	P4	F	300	SET CATH. ACT. SWITCH TO TEST POS. MAKE NO GAS TEST. NOTE 6.
GL546	6.3	ET-1702-5	--	90	P5	G	----	STRIKES AT ABOUT 1.8 V. NOTES 2&3.
CK547DX	1.1	DV-4120-0	2.4	--	P4	F	270	NOTE 6.
CK548DX	1.1	DV-4120-0	6.1	--	P4	F	190	NOTE 6.
CK556AX	1.1	ES-3100-0	6.0	--	P4	D	1000	NOTE 6.
CK568AX	1.1	ES-3100-0	9.0	--	P4	D	410	NOTE 6.
CK569AX	1.1	DV-4120-0	0.0	--	P4	D	690	PLATE VOLTS = LOW. NOTE 6.
CK571AX	1.1	DU-7120-0	18.0	--	P4	F	100	NOTE 6.
CK573AX	1.1	CU-3100-0	0.0	--	P4	D	1260	PLATE VOLTS = LOW. NOTE 6.
CK574AX	0.6	DV-4120-0	6.0	--	P4	F	100	NOTE 6.
CK578AX	1.1	DV-4120-0	2.2	--	P4	E	800	
CK605CX	6.3	DU-7126-5	1.8	--	P4	C	3150	
CK606BX	6.3	CT-0104-0	0.0	0	P1	G	----	DIODE. NOTE 3.
CK608CX	6.3	DU-5106-0	3.2	--	P4	C	3150	
CK619CX	6.3	CT-4105-0	0.6	--	P4	C	2500	
629	3.0	FR-3204-0	--	89	P5	G	----	STRIKES AT ABOUT 1.5 V. NOTES 2&3.
801A	7.5	ER-3200-0	0.0	--	P4	E	950	NOTE 6.
802	6.3	HR-4036-5	3.5	--	P4	E	1260	CAP = P.
807	6.3	FR-3024-0	6.0	--	P4	D	2400	CAP = P.
809	6.3	ER-3000-0	0.0	--	P4	D	1050	CAP = P. NOTE 6.
811	6.3	ER-3000-0	0.0	--	P4	E	850	CAP = P. NOTE 6.
812	6.3	ER-3000-0	0.0	--	P4	E	1400	CAP = P. NOTE 6.
815	6.3	JV-7043-2	7.0	--	P4	D	2500	PENTODE NO. 1. LEFT CAP = P.
815	6.3	BV-2043-7	7.0	--	P4	D	2500	PENTODE NO. 2. RIGHT CAP = P.
816	2.5	ER-0000-0	0.0	91	P3	G	----	CAP = P. NOTES 3 & 6.
SD828A	6.3	EW-3152-0	2.8	--	P4	C	2080	
SD828E	6.3	EW-3051-2	1.6	--	P4	D	1825	TOP LEAD = P.
834	7.5	ER-0000-0	0.0	--	P4	E	1040	NEAR CAP = G. FAR CAP = P. NOTE 6.
837	12.6	HR-4036-5	2.0	--	P4	D	1900	CAP = P.
841	7.5	ER-3200-0	0.0	--	P4	E	630	NOTE 6.
842	7.5	ER-3200-0	18.0	--	P4	E	750	NOTE 6.
843	2.5	FR-3204-0	1.3	--	P4	E	1030	
864	1.1	ER-3200-0	13.0	--	P4	D	410	NOTE 6.
865	7.5	ER-3020-0	7.2	--	P4	E	390	CAP = P. NOTE 6.
879	2.5	ER-0000-0	0.0	40	P5	G	----	CAP = P. NOTES 3 & 6.
SD917A	6.3	DU-2105-0	0.8	--	P4	D	1700	PLATE VOLTS = LOW.
SN944	6.3	EW-3051-2	2.0	--	P4	D	1500	TOP LEAD = P.
SN946B	6.3	CT-0104-0	0.0	0	P1	G	----	DIODE. NOTE 3.
SN947D	6.3	DW-1578-0	11.0	--	P4	C	3150	
SN949C	6.3	DW-7105-2	--	89	P5	G	----	STRIKES AT ABOUT 2.5 V. NOTES 2&3.
950	2.0	FR-3240-0	11.0	--	P4	E	600	NOTE 6.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
951	2.0	ER-0230-0	2.3	--	--	E	500	CAP = G. HOLD DOWN P1 & PRESS P4. NOTE 6.
SN953D	6.3	DW-1572-0	3.0	--	P4	C	3800	
954	6.3	GR-8037-4	3.3	--	P4	E	700	CAP = P.
MODEL 539C#								
954	6.3	HS-8036-4	3.3	--	P4	E	700	CAP = P. USE ADAPTER SA-7, 1050-9.
SN954	6.3	ES-0103-0	0.0	85	P3	G	----	NOTE 3.
SN954B	6.3	DW-0205-0	0.0	85	P3	G	----	NOTE 3.
955	6.3	GR-4307-0	4.8	--	P4	E	1200	
MODEL 539C#								
955	6.3	HS-4306-0	4.8	--	P4	E	1200	USE ADAPTER SA-7, 1050-9.
956	6.3	GR-8037-4	2.3	--	P4	D	950	CAP = P.
MODEL 539C#								
956	6.3	HS-8036-4	2.3	--	P4	D	950	CAP = P. USE ADAPTER SA-7, 1050-9.
SN956B	1.1	BS-0000-0	0.0	--	P3	B	----	TOP LEAD = P. CONNECT FIL. LEADS TO PINS 1 & 2. NOTES 3 & 6.
957	1.4	GR-4300-0	8.3	--	P4	D	400	NOTE 6.
MODEL 539C#								
957	1.4	HS-4300-0	8.3	--	P4	D	400	USE ADAPTER SA-7, 1050-9. NOTE 6.
SN957A	6.3	FT-4102-0	1.4	--	P4	D	1700	PLATE VOLTS = LOW.
958	1.4	GR-4300-0	8.3	--	P4	D	750	NOTE 6.
MODEL 539C#								
958	1.4	HS-4300-0	8.3	--	P4	D	750	USE ADAPTER SA-7, 1050-9. NOTE 6.
959	1.4	GR-8030-0	3.0	--	P4	E	380	CAP = P. NOTE 6.
MODEL 539C#								
959	1.4	HS-8030-4	3.0	--	P4	E	380	CAP = P. USE ADAPTER SA-7, 1050-9. NOTE 6.
SN972D	6.3	DW-1574-0	1.6	--	P4	D	1900	
SN973B	6.3	DW-1574-0	2.0	--	P4	C	2500	
SN976C	6.3	DW-1578-0	12.0	--	P4	C	3150	
SD993C	6.3	DW-1805-0	0.0	--	P4	C	3660	PLATE VOLTS = LOW.
SD995B	6.3	DW-1574-0	1.6	--	P4	D	1900	
FM1000	6.3	JR-6453-2	--	--	--	-	----	USE THIS SETTING FOR SHORT CHECK ONLY.
FM1000	6.3	JR-2503-7	3.2	--	P4	D	950	PLATE VOLTS = LOW.
1005	6.3	GY-0305-0	0.0	88	P5	G	----	PLATE NO. 1. NOTES 3 & 6.
1005	6.3	GY-0503-0	0.0	88	P5	G	----	PLATE NO. 2. NOTES 3 & 6.
SN1006	6.3	FT-4102-0	1.5	--	P4	D	1500	PLATE VOLTS = LOW.
CK1027	---	AP-0407-0	0.0	67	P5	G	----	CAP = P. NOTE 3.
CK1042	---	AP-0105-0	0.0	87	P2	G	----	NOTE 3.
E1148	6.3	HS-0008-0	1.5	--	P4	D	1390	UPPER CAP = P. LOWER CAP = G.
1201	6.3	JS-1304-0	2.4	--	P4	D	1900	
1203	6.3	JR-0407-0	0.0	--	P1	E	----	DIODE. NOTE 3.
1204	6.3	HS-5314-0	1.5	--	P4	D	1150	
1216	6.3	ET-5207-0	3.5	--	P4	D	2150	TRIODE NO. 1.
1216	6.3	ET-6107-0	3.5	--	P4	D	2150	TRIODE NO. 2.
1229	2.0	ER-0230-0	3.0	--	--	E	400	CAP = G. HOLD DOWN P1 & PRESS P4. NOTE 6.
1230	2.0	ER-3200-0	10.2	--	P4	E	570	NOTE 6.
1231	6.3	JR-6237-4	0.5	--	P4	C	3460	
1232	6.3	JR-6237-4	1.1	--	P4	D	2840	
1237	2.5	HS-0300-0	0.0	93	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
1237	2.5	HS-0600-0	0.0	93	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
1247	0.6	EV-0000-0	0.0	0	P1	G	----	TOP LEAD = P. NOTES 3 & 6.
HY1269	12.6	FR-3024-0	0.0	--	P4	D	2500	CAP = P. SHORT ON 1. NOTE 6.
1273	6.3	JR-6237-4	1.1	--	P4	D	1450	
1274	6.3	HS-0508-3	0.0	85	P3	G	----	PLATE NO. 1. NOTE 3.
1274	6.3	HS-0308-5	0.0	85	P3	G	----	PLATE NO. 2. NOTE 3.
1280	12.6	JR-6237-4	1.1	--	P4	D	1450	
1284	12.6	JR-6237-4	5.0	--	P4	E	1260	
1285	25.0	HS-5348-0	12.0	--	P4	C	3650	
1291	2.5	AY-6700-0	2.8	--	P4	D	1200	TRIODE NO. 1. PLATE VOLTS = LOW. NOTE 6.
1291	2.5	JR-3200-0	2.8	--	P4	D	1200	TRIODE NO. 2. PLATE VOLTS = LOW. NOTE 6.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT. COND.	NOTATIONS
1293	1.4	JR-6200-0	5.0	--	P4	D	820	NOTE 6.
1294	1.4	JR-0407-0	0.0	--	P1	D	----	DIODE. NOTE 3.
1299	2.5	JR-6230-0	4.0	--	--	D	1300	HOLD DOWN P1 & PRESS P4. NOTE 6.
1603	6.3	GR-0235-4	3.7	--	P4	E	770	CAP = G.
1609	1.1	FR-3240-0	0.0	--	--	E	440	HOLD DOWN P1 & PRESS P4. NOTE 6.
1612	6.3	HS-0348-5	5.0	--	P4	E	410	CAP GRID. CAP = G.
1612	6.3	HS-5348-1	5.0	--	P4	E	410	PIN GRID.
1613	6.3	HS-5348-0	1.7	--	P4	D	1640	
1614	6.3	HS-5348-1	3.0	--	P4	C	3300	
1616	3.0	FR-0000-0	0.0	86	P2	G	----	CAP = P. NOTES 3 & 6.
1619	2.5	HS-5340-8	1.3	--	P4	D	2150	NOTE 6.
1620	6.3	HS-0348-5	4.0	--	P4	F	770	CAP = G.
1621	6.3	HS-5348-0	1.7	--	P4	D	1640	
1622	6.3	HS-5348-0	3.0	--	P4	C	3300	
1623	6.3	FR-3000-0	0.0	--	P4	F	1400	CAP = P. NOTE 6.
1624	2.5	FR-3020-0	0.0	--	P4	D	2500	CAP = P. NOTE 6.
1625	12.6	HR-4036-0	6.0	--	P4	D	2400	CAP = P.
1626	12.6	HS-5308-0	16.0	--	P4	E	1325	
1629	12.6	HS-5408-0	0.0	--	P4	G	----	EYE OPEN.
1629	12.6	HS-5438-0	0.0	--	P4	G	----	EYE CLOSED.
1631	12.6	HS-5348-1	3.0	--	P4	C	3300	
1632	12.6	HS-5348-0	1.5	--	--	C	5650	HOLD DOWN P1 & PRESS P4.
1633	25.0	HY-4506-0	3.7	--	P4	D	1640	TRIODE NO. 1.
1633	25.0	HY-1203-0	3.7	--	P4	D	1640	TRIODE NO. 2.
1634	12.6	HY-4506-1	0.9	--	P4	D	830	TRIODE NO. 1.
1634	12.6	HY-3206-1	0.9	--	P4	D	830	TRIODE NO. 2.
1635	6.3	HS-4308-0	0.0	--	P4	D	540	TRIODE NO. 1.
1635	6.3	HS-5608-0	0.0	--	P4	D	540	TRIODE NO. 2.
1641	5.0	FR-0000-0	0.0	84	P3	G	----	LEFT CAP = P. NOTES 3 & 6.
1641	5.0	RU-0000-0	0.0	84	P3	G	----	RIGHT CAP = P. NOTES 3 & 6.
1642	6.3	HR-4506-0	7.5	--	P4	E	870	TRIODE NO. 1.
1642	6.3	HR-0302-0	7.5	--	P4	E	870	TRIODE NO. 2. CAP = G.
1644	12.6	HW-1852-3	3.0	--	P4	D	1350	PENTODE NO. 1.
1644	12.6	HW-3452-1	3.0	--	P4	D	1350	PENTODE NO. 2.
1654	1.4	RX-0000-0	0.0	--	P5	E	----	CAP = P. NOTES 3 & 6.
1658	2.0	FR-3200-0	10.2	--	P4	F	570	NOTE 6.
1659	2.5	GR-0205-0	1.1	--	P4	D	700	TRIODE SECTION. CAP = G.
1659	2.5	GR-0405-0	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
1659	2.5	GR-0305-0	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
1851	6.3	HS-0348-5	1.0	--	P4	C	5650	CAP = G.
1852	6.3	HS-4865-3	1.0	--	P4	C	5650	
1853	6.3	HS-4865-3	2.0	--	P4	D	2200	
5516	6.3	HS-5031-0	6.0	--	P4	D	2500	CAP = P. SHORT ON 1. NOTE 6.
5517	---	AP-0407-0	0.0	89	P2	G	----	CAP = P. NOTE 3.
5556	4.3	FR-3200-0	4.5	--	P4	E	625	NOTE 6.
5608A	2.5	HR-5604-2	1.5	--	P4	D	1550	TRIODE NO. 1.
5608A	2.5	HR-3204-6	1.5	--	P4	D	1550	TRIODE NO. 2.
5610	6.3	FT-6102-0	1.0	--	P4	D	2500	PLATE VOLTS = LOW.
5618	6.3	RX-6234-0	8.0	--	P4	D	1900	NOTE 6.
5633	6.3	FW-3051-2	2.0	--	P4	D	1500	TOP LEAD = P.
5634	6.3	FW-3051-2	1.6	--	P4	D	1825	TOP LEAD = P.
5635	6.3	DW-1708-4	1.5	--	P4	C	2400	TRIODE NO. 1.
5635	6.3	DW-2508-4	1.5	--	P4	C	2400	TRIODE NO. 2.
5637	6.3	DW-2105-0	0.8	--	P4	D	1700	PLATE VOLTS = LOW.
5638	6.3	FW-3152-0	2.8	--	P4	C	2080	
5639	6.3	DW-1572-0	3.0	--	P4	C	3800	
5640	6.3	DW-1578-0	11.0	--	P4	C	3150	
5641	6.3	DW-0205-0	0.0	85	P3	G	----	NOTE 3.
5645	6.3	FT-4102-0	1.4	--	P4	D	1700	PLATE VOLTS = LOW.
5646	6.3	FT-4102-0	1.5	--	P4	D	1500	PLATE VOLTS = LOW.
5647	6.3	CT-0104-0	0.0	0	P1	G	----	DIODE. NOTE 3.
5659	12.6	HS-5348-0	6.0	--	P4	D	1900	

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
5660	12.6	HS-0368-0	4.0	--	P4	D	725	PENTODE SECTION. CAP = G.
5660	12.6	HS-0568-0	0.0	--	P1	D	----	DIODE NO. 1. NOTE 3.
5660	12.6	HS-0468-0	0.0	--	P1	D	----	DIODE NO. 2. NOTE 3.
5661	12.6	HS-4865-3	2.0	--	P4	D	1260	
5662	6.3	ET-1705-0	--	88	P5	G	----	STRIKES AT ABOUT 5 V. NOTES 2 & 3.
5663	6.3	ET-1702-5	--	89	P5	G	----	STRIKES AT ABOUT 2 V. NOTES 2 & 3.
5679	6.3	JR-0607-5	0.0	--	P1	E	----	DIODE NO. 1. NOTE 3.
5679	6.3	JR-0302-5	0.0	--	P1	E	----	DIODE NO. 2. NOTE 3.
5690	6.3	HW-0508-3	0.0	90	P3	G	----	UNIT NO. 1. NOTE 3.
5690	6.3	CR-0304-5	0.0	90	P3	G	----	UNIT NO. 2. NOTE 3.
5691	6.3	HY-4506-2	1.0	--	P4	C	1000	TRIODE NO. 1.
5691	6.3	HY-1203-5	1.0	--	P4	C	1000	TRIODE NO. 2.
5692	6.3	HY-4506-2	4.5	--	P4	D	1400	TRIODE NO. 1.
5692	6.3	HY-1203-5	4.5	--	P4	D	1400	TRIODE NO. 2.
5693	6.3	HS-4865-3	4.0	--	P4	D	1040	
5694	6.3	HS-4301-0	0.0	--	P4	D	1500	TRIODE NO. 1.
5694	6.3	HS-5608-0	0.0	--	P4	D	1500	TRIODE NO. 2.
5731	6.3	GR-4307-0	3.3	--	P4	D	1400	
MODEL 539C#								
5731	6.3	HS-4306-0	3.3	--	P4	D	1400	USE ADAPTER SA-7, 1050-9.
5732	6.3	HS-0348-5	2.8	--	P4	E	910	CAP = G.
5742	4.3	ER-3200-0	0.9	--	P4	E	530	NOTE 6.
5785	1.1	GX-0100-0	0.0	--	P1	D	----	NOTES 3 & 6.
5812	6.3	ET-1560-2	8.0	--	P4	D	2700	NOTE 6.
5823	OFF	AP-4301-0	0.0	70	--	G	----	HOLD DOWN P6 & PRESS P5. REVERSE METER. SOME TUBES SHORT ON 3-4. NOTE 3.
5824	25.0	HS-5348-0	17.0	--	P4	D	2500	
5825	1.4	ER-0000-0	0.0	--	P5	D	----	CAP = P. OK ABOVE 600 ON 6000 SCALE. NOTES 3 & 6.
5838	12.6	HS-0508-0	0.0	81	P3	G	----	PLATE NO. 1. NOTE 3.
5838	12.6	HS-0308-0	0.0	81	P3	G	----	PLATE NO. 2. NOTE 3.
5839	25.0	HS-0508-3	0.0	85	P3	G	----	PLATE NO. 1. NOTE 3.
5839	25.0	HS-0308-5	0.0	85	P3	G	----	PLATE NO. 2. NOTE 3.
5851	2.5	HR-8360-0	6.0	--	P4	E	1000	NOTE 6.
5854	1.1	DV-4120-0	4.0	--	P4	F	310	PLATE VOLTS = LOW. NOTE 6.
5875	1.1	DV-4120-0	1.4	--	P4	D	1250	
5879	6.3	EV-1873-9	3.3	--	P4	E	630	
5886	1.1	DU-7120-0	18.0	--	P4	F	100	NOTE 6.
5910	1.4	BX-6230-0	3.6	--	P4	D	570	NOTE 6.
5967	1.1	ES-6801-3	2.0	--	P4	D	1260	TRIODE NO. 1. PLATE VOLTS = LOW. NOTE 6.
5967	1.1	ES-3108-6	2.0	--	P4	D	1260	TRIODE NO. 1. PLATE VOLTS = LOW. NOTE 6.
5992	6.3	HS-5348-0	3.0	--	P4	D	2200	
6000	25.0	HS-1583-0	0.6	--	P4	C	4250	
6004	5.0	JS-0000-0	0.0	73	P3	G	----	NEAR CAP = P. NOTE 3.
6004	5.0	JS-0000-0	0.0	73	P3	G	----	FAR CAP = P. NOTE 3.
6007	1.1	DV-4120-0	4.4	--	P4	F	260	NOTE 6.
6008	0.6	DV-4120-0	5.7	--	P4	F	65	NOTE 6.
6026	6.3	EV-7803-0	3.2	--	P4	C	3700	
6029	1.1	CU-3100-0	0.0	--	P4	D	1260	PLATE VOLTS = LOW. NOTE 6.
6087	5.0	JS-0600-0	0.0	80	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
6087	5.0	JS-0400-0	0.0	80	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
6088	1.1	DV-4120-0	3.0	--	P4	D	400	PLATE VOLTS = LOW. NOTE 6.
6094	6.3	DV-1428-0	2.1	--	P4	D	2600	
6099	6.3	ET-5207-0	1.8	--	P4	C	3340	TRIODE NO. 1.
6099	6.3	ET-6107-0	1.8	--	P4	C	3340	TRIODE NO. 2.
6100	6.3	ET-6107-0	4.8	--	P4	E	1380	
6101	6.3	ET-5207-6	1.8	--	P4	C	3800	TRIODE NO. 1.
6101	6.3	ET-6107-5	1.8	--	P4	C	3800	TRIODE NO. 2.
6106	5.0	JS-0600-0	0.0	85	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
6106	5.0	JS-0400-0	0.0	85	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
6113	6.3	HY-4506-2	0.4	--	P4	D	1000	TRIODE NO. 1.
SEE NEXT PAGE FOR CONTINUATION								

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
6113	6.3	HY-1203-5	0.4	--	P4	D	1000	TRIODE NO. 2.
6145	6.3	JR-6237-4	0.0	--	P4	C	5650	
6147	2.5	HR-8360-0	6.0	--	P4	E	1000	NOTE 6.
6169	6.3	DW-1204-0	0.7	--	P4	C	3800	
6184	6.3	DW-0204-8	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
6184	6.3	DW-0705-8	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
6188	6.3	HY-4506-2	1.0	--	P4	D	1000	TRIODE NO. 1.
6188	6.3	HY-1203-5	1.0	--	P4	D	1000	TRIODE NO. 2.
6355	6.3	FT-1427-0	0.0	100	P4	G	----	EYE 1 OPEN. EYE 2 CLOSED.
6355	6.3	FT-4127-0	0.0	100	P4	G	----	EYE 2 OPEN. EYE 1 CLOSED.
6877	6.3	DV-1408-0	9.4	--	P4	C	4000	
6888	6.3	HS-4865-3	9.0	--	P4	E	1180	
6954	6.3	ET-1562-7	1.0	--	P4	D	1750	
7193	6.3	HS-0008-0	3.7	--	P4	D	1900	
8013A	3.0	ER-0000-0	0.0	20	P5	G	----	UPPER CAP = G. LOWER CAP = P. CAP = P. NOTE 3.
8016	1.1	HS-0000-0	0.0	12	P5	G	----	CAP = P. NOTES 3 & 6.
9001	6.3	ET-1567-0	4.5	--	P4	D	700	
9002	6.3	ET-6107-0	4.8	--	P4	C	1200	
9003	6.3	ET-1562-0	1.5	--	P4	D	1125	
9004	6.3	GR-0304-0	0.0	0	P1	G	----	DIODE. NOTE 3.
MODEL 539C# 9004	6.3	HS-0304-0	0.0	0	P1	G	----	DIODE. USE ADAPTER SA-7, 1050-9. NOTE 3.
9005	4.3	GR-0403-0	0.0	--	P1	E	----	DIODE. NOTE 3.
MODEL 539C# 9005	4.3	HS-0403-0	0.0	--	P1	E	----	DIODE. USE ADAPTER SA-7, 1050-9. NOTE 3.
9006	6.3	ET-0107-0	0.0	--	P1	E	----	DIODE. NOTE 3.
38142	7.5	ER-3200-0	8.0	--	P4	E	1380	NOTE 6.
XX8	2.5	BY-5600-0	3.5	--	P4	D	700	TRIODE NO. 1. PLATE VOLTS = LOW. NOTE 6.
XX8	2.5	JR-4300-0	3.5	--	P4	D	700	TRIODE NO. 2. PLATE VOLTS = LOW. NOTE 6.
XXD	12.6	JR-5607-0	4.2	--	P4	D	1640	TRIODE NO. 1.
XXD	12.6	JR-4302-0	4.2	--	P4	D	1640	TRIODE NO. 2.
XXFM	6.3	JR-3204-0	1.1	--	P4	D	630	TRIODE SECTION.
XXFM	6.3	JR-0504-0	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
XXFM	6.3	JR-0607-0	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
XXL	6.3	JR-6207-0	3.7	--	P4	D	1640	

FOREIGN TUBE TYPES
SUPPLEMENTARY TEST DATA

NOTATIONS

- NOTE 1: The letter that appears in the RANGE column indicates the setting of the FUNCTION SWITCH.
- NOTE 2: (symbol "# " on Roll Chart) Set BIAS VOLTS at 40, press and hold down button indicated in the PRESS column while rotating BIAS VOLTS control until tube strikes. The striking voltages indicated are nominal values and reference to handbook "Critical Grid Characteristics" of Thyratron tubes reveals appreciable variations from these values.
- NOTE 3: (symbol "★ " on Roll Chart) Make emission tests only. Good tubes will read above index mark "RECTIFIERS & DIODES OK" on METER.
- NOTE 4: Mutual Conductance Values are minimum. Discard tubes which read lower.
- NOTE 5: Readjust BIAS VOLTS after button P4 is pressed, then read Gm.
- NOTE 6: (symbol "♣ " on Roll Chart) A short indication on position "A" of the shorts switch is normal.
- NOTE 7: For TUBE TESTER Models 539B, the Universal Adapter CA-5, 1050-164, is available. This Adapter provides tube test sockets for Compactrons, Novars, 5 and 7-pin Nuvisors, and the new 10-pin tubes, including Decals. Test data for these tubes is supplied in supplementary form with the Adapter. The CA-4, 1050-135 Adapter (discontinued) can still be used but requires the use of the SA-11, 1050-177 Adapter for testing decal types. See inside cover for description of all adapters.
- NOTE 8: "Cut off" tube section NOT being tested by means of a 30 to 35 volt battery (Eveready 413 or equal). Polarity and connections are indicated in the NOTATIONS column: e.g., NOTE 8: 7-, 2+, indicates connect negative lead to pin 7 and positive lead to pin 2 of any convenient socket on the tester.
- CAUTION: Disconnect battery between any change of SELECTORS.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT. COND.	NOTATIONS
1AJ4	1.4	HR-6230-0	4.4	---	P4	E	300	PENTODE SECT. PLATE VOLTS = LOW. NOTE 6. DIODE SECT. OK ABOVE 300 ON 3000 SCALE. NOTES 3 & 6. PENTODE SECT. PLATE VOLTS = LOW. NOTE 6. DIODE SECT. OK ABOVE 300 ON 3000 SCALE. NOTES 3 & 6.
1AR5	1.4	BX-6540-0	1.4	---	P4	D	340	
1AR5	1.4	BX-0300-0	0.0	---	P1	D	----	
1AS5	1.4	BX-6230-0	1.4	---	P4	D	380	
1AS5	1.4	BX-0400-0	0.0	---	P1	D	----	CONNECT FIL LEADS TO OCTAL SOCKET PINS 2 & 7. SINGLE LEAD = P. NOTES 3 & 6. CAP=P. NOTE 3. CAP=P. NOTES 3 & 6. CAP=P. NOTES 3 & 6. GRID NO. 3. NOTE 6.
1BG2	1.4	CX-0000-0	0.0	27	P5	G	----	
1BK2	1.4	BS-0000-0	0.0	14	P5	G	----	
1BQ2	1.4	BS-0000-0	0	15	P5	G	----	
1BX2	1.4	BS-0000-0	0.0	12	P5	G	----	OSC. SECT. PLATE VOLTS = LOW. NOTE 6. DIODE. NOTE 3. TOP LEAD=P. CONNECT FIL. LEADS TO PINS 1 AND 2. NOTES 3 & 6. NOTE 6. PLATE VOLTS = LOW. NOTE 6.
1C1	1.4	BX-6234-0	2.0	---	P4	E	340	
1C1	1.4	BX-4306-2	2.0	---	P4	E	880	
1D13	1.4	HR-0203-0	0.0	---	P1	D	----	
1D-K29	1.1	BS-0000-0	0.0	---	P3	B	----	ADJUST BIAS TO VARY BAR LENGTH. DO NOT ADJUST BELOW 4.0 VOLTS. ADJUST BIAS TO VARY BAR LENGTH. DO NOT ADJUST BELOW 4.0 VOLTS. PLATE VOLTS = LOW. NOTE 6. NOTE 6. PLATE VOLTS = LOW. (SEE BELOW) NOTE 7.
1F2	1.4	HR-6230-0	2.8	---	P4	E	650	
1F3	1.4	BX-6230-0	0.0	---	P4	E	490	
1M3	1.4	EV-1800-0	VARY	---	P5	C	----	
1N3	1.4	EV-1800-0	VARY	---	P5	C	----	PLATE VOLTS= LOW. (SEE BELOW). USE ADAPTER SA-3, 1050-127, OR ADAPTER CA-4, 1050-135 WITH MODEL 539B. MODEL 539C REQUIRES NO ADAPTER. CAP=P. NOTES 3 & 6.
1P10	2.5	HR-3240-0	5.0	---	P4	E	950	
1P11	3.0	HR-6230-0	6.0	---	P4	E	1260	
2H-H5	2.0	DR-4208-0	0.5	---	P4	C	5000	
2B-H5	2.0	13-4208-0	0.5	---	P4	C	5000	MODEL 539H USING ADAPTER SA-3, 1050-127. NOTE 7. PLATE VOLTS=LOW. MODEL 539C# REQUIRES NO ADAPTER. PLATE VOLTS= LOW. NOTE 7. HEPTODE SECTION. TRIODE SECTION.
2BU2	2.5	B3-0000-0	0.0	12	P5	G	----	
2ER5	2.0	ET-2567-0	0.8	---	P4	C	6600	
2FY5	2.5	ET-2501-6	1.4	---	P4	C	7000	
2HA5	2.0	ET-1507-6	1.2	---	P4	C	8000	CAP=P. NOTES 3 & 6. USE ADAPTER SA-8, 1050-162.
2N-H11	2.0	DR-4208-0	0.4	---	P4	C	4700	
2N-H11	2.0	13-4208-0	0.4	---	P4	C	4700	
2N-H12	2.0	13-6207-0	0.8	---	P4	C	7000	
3AJ8	3.0	EV-2613-7	3.5	---	P4	D	950	PENTODE SECTION
3AJ8	3.0	EV-9803-2	1.5	---	P4	D	2300	
3BH2	3.0	JR-0000-0	0.0	30	P5	G	----	
3BX6	3.0	EV-2781-9	0.5	---	P4	C	4500	
3BY7	3.0	EV-2781-9	2.0	---	P4	D	2500	TRIODE SECTION. PENTODE SECTION. TRIODE SECTION.
3EH7	3.0	EV-2781-9	2.4	---	P4	C	3200	
3EJ7	3.0	EV-2781-9	1.2	---	P4	C	4900	
3ER5	3.0	ET-2567-0	0.8	---	P4	C	6600	
3FY5	3.0	ET-2501-6	1.4	---	P4	C	7000	
3HA5	2.5	ET-1507-6	1.2	---	P4	C	8000	
3M-P26	3.0	ET-1562-0	10.0	---	P4	D	2500	
4AB8	4.3	EV-9683-7	4.0	---	P4	D	2100	
4AB8	4.3	EV-2103-0	5.0	---	P4	D	850	
4BL8	4.3	EV-2637-1	1.2	---	P4	C	3000	
4BL8	4.3	EV-9108-6	4.8	---	P4	C	3000	
4BN4	4.3	ET-2501-0	1.9	---	P4	C	4300	
4CM4	4.3	EV-2103-0	1.2	---	P4	B	8800	
4DL4	4.3	EV-9802-0	1.3	---	P4	E	7500	
4EH7	4.3	EV-2781-9	2.4	---	P4	C	3200	
4EJ7	4.3	EV-2781-9	1.2	---	P4	C	4900	
4ER5	4.3	ET-2567-0	0.8	---	P4	C	4500	

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
4ES8	4.3	EV-7608-0	2.4	---	P4	C	7500	TRIODE NO. 1.
4ES8	4.3	EV-2103-0	2.4	---	P4	C	7500	TRIODE NO. 2.
4FY5	4.3	ET-2501-6	1.4	---	P4	C	7000	
4GJ7	4.3	EV-2671-0	1.0	---	P4	C	4900	PENTODE SECTION.
4GJ7	4.3	EV-9803-0	4.2	---	P4	C	6100	TRIODE SECTION.
4GS7	4.3	EV-9678-0	0.4	---	P4	C	5000	PENTODE SECTION.
4GS7	4.3	EV-1203-0	5.0	---	P4	C	3100	TRIODE SECTION.
4HA5	4.3	ET-1507-6	1.2	---	P4	C	8000	
4HG8	4.3	EV-2893-0	0.8	---	P4	C	5050	PENTODE SECTION.
4HG8	4.3	EV-6703-0	8.0	---	P4	C	4000	TRIODE SECTION.
4KN8	4.3	EV-7608-0	2.2	---	P4	B	7900	TRIODE NO. 1.
4KN8	4.3	EV-2103-0	2.2	---	P4	B	7900	TRIODE NO. 2.
4MP12	5.0	ET-1562-0	2.2	---	P4	C	2600	
4M-P26	4.3	ET-1562-0	10.0	---	P4	D	2500	
4R-HH2	4.3	EV-7608-9	2.0	---	P4	C	4000	TRIODE NO. 1.
4R-HH2	4.3	EV-2103-9	2.0	---	P4	C	4000	TRIODE NO. 2.
4R-HH8	4.3	EV-7608-0	2.2	---	P4	B	7900	TRIODE NO. 1.
4R-HH8	4.3	EV-2103-0	2.2	---	P4	B	7900	TRIODE NO. 2.
5AR4	5.0	JS-0600-0	0.0	88	P3	G	----	PLATE NO. 1. NOTE 3.
5AR4	5.0	JS-0400-0	0.0	88	P3	G	----	PLATE NO. 2. NOTE 3.
5ES8	5.0	EV-7608-0	2.4	---	P4	C	7500	TRIODE NO. 1.
5ES8	5.0	EV-2103-0	2.4	---	P4	C	7500	TRIODE NO. 2.
5GJ7	5.0	EV-2671-0	1.0	---	P4	C	4900	PENTODE SECTION.
5GJ7	5.0	EV-9803-0	4.2	---	P4	C	6100	TRIODE SECTION.
5GS7	5.0	EV-9678-0	0.4	---	P4	C	5000	PENTODE SECTION.
5GS7	5.0	EV-1203-0	5.0	---	P4	C	3100	TRIODE SECTION.
5HG8	5.0	EV-2893-0	0.8	---	P4	C	5000	PENTODE SECTION.
5HG8	5.0	EV-6703-0	8.0	---	P4	C	4000	TRIODE SECTION.
5MHH3	5.0	ET-6107-0	1.5	---	P4	C	5500	TRIODE NO. 1.
5MHH3	5.0	ET-5207-0	1.5	---	P4	C	5500	TRIODE NO. 2.
5M-K9	5.0	ET-0503-0	0.0	86	P3	G	----	NOTE 3.
5U9	6.3	FW-3782-4	1.5	---	P4	C	4400	PENTODE SECTION. USE ADAPTER SA-11 MODEL 5398# USE SA-11 & CA-4. NOTE 7.
5U9	6.3	FW-W901-0	4.5	---	P4	C	3150	TRIODE SECTION.
5V9	5.0	FW-3741-2	1.0	---	--	E	700	HEPTODE SECTION. HOLD DOWN P1 & PRESS P4. USE ADAPTER SA-11. MODEL 5398# USE SA-11 & CA-4. NOTE 7.
5V9	5.0	FW-8W09-0	2.4	---	P4	C	3150	TRIODE SECTION.
5X9	6.3	FW-3782-4	1.5	---	P4	C	4700	PENTODE SECTION. USE ADAPTER SA-11 MODEL 5398# USE SA-11 & CA-4. NOTE 7.
5X9	6.3	FW-W901-0	1.2	---	P4	D	3000	TRIODE SECTION.
6AB8	6.3	EV-9683-7	4.0	---	P4	D	2100	PENTODE SECTION
6AB8	6.3	EV-2103-0	5.0	---	P4	D	850	TRIODE SECTION
6AB8	6.3	EV-9683-7	4.0	---	P4	D	2100	PENTODE SECTION
6AB9	6.3	FW-978W-0	1.5	---	P4	C	4400	TETRODE NO. 1. USE ADAPTER SA-11. MODEL 5398# USE SA-11 & CA-4. NOTE 7.
6AB9	6.3	FW-3124-0	1.5	---	P4	C	4400	TETRODE NO. 2.
6AF9	6.3	FW-8W97-0	2.2	---	P4	C	6300	PENTODE NO. 1. USE ADAPTER SA-11. MODEL 5398# USE SA-11 & CA-4. NOTE 7.
6AF9	6.3	FW-1432-0	1.0	---	P4	C	5300	PENTODE NO. 2.
6AJ8	6.3	EV-2613-7	3.5	---	P4	D	950	HEPTODE SECTION.
6AJ8	6.3	EV-9803-2	1.5	---	P4	D	2300	TRIODE SECTION.
6AK8	6.3	EV-8907-0	1.3	---	P4	E	750	TRIODE SECTION.
6AK8	6.3	EV-0607-0	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
6AK8	6.3	EV-0203-0	0.0	---	P1	E	----	DIODE NO. 2. NOTE 3.
6AK8	6.3	EV-0107-0	0.0	---	P1	E	----	DIODE NO. 3. NOTE 3.
6AL3	6.3	EV-0009-0	0.0	89	P3	G	----	REVERSE METER. CAP = P. NOTE 3.
6AM5	6.3	ET-1572-0	5.3	---	P4	D	1650	
6AM6	6.3	ET-1572-6	1.0	---	P4	C	3800	
6AQ4	6.3	ET-1705-0	0.8	---	P4	C	5300	

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
6AQ8	6.3	EV-7608-9	1.6	---	P4	D	2500	TRIODE NO. 1.
6AQ8	6.3	EV-2103-9	1.6	---	P4	D	2500	TRIODE NO. 2.
6B-B14	6.3	EV-1063-0	23	---	P4	D	2800	CAP=P. USE ADAPTER SA-8, 1050-168.
6BD7A	6.3	EV-2103-0	1.3	---	P4	E	790	TRIODE SECTION.
6BD7A	6.3	EV-0603-0	0.0	---	P1	C	----	DIODE NO. 1. NOTE 3.
6BD7A	6.3	EV-0803-0	0.0	---	P1	C	----	DIODE NO. 2. NOTE 3.
6BJ5	6.3	ET-1572-0	1.0	---	P4	C	5000	
6BK8	6.3	EV-9613-8	1.5	---	P4	D	1150	
6BL8	6.3	EV-2637-1	1.2	---	P4	C	3000	PENTODE SECTION.
6BL8	6.3	EV-9108-6	4.8	---	P4	C	3000	TRIODE SECTION.
6BM8	6.3	EV-3672-0	7.4	---	P4	D	2700	PENTODE SECTION.
6BM8	6.3	EV-1908-0	0.6	---	P4	E	1350	TRIODE SECTION.
6BN5	6.3	EV-2793-0	4.0	---	P4	D	1850	
6BQ5	6.3	EV-2793-0	1.0	---	P4	C	5650	TUBES INDICATING GAS# RE-TEST USING EV-1793-0
6BR3	6.3	EV-0009-0	0.0	50	P1	G	----	CAP = P. REVERSE METER. NOTE 3.
6BR5	6.3	EV-1902-0	VARY	100	P4	G	----	CONNECT A 1 MEGOHM RESISTOR FROM PLATE JACK TO OCTAL SOCKET PIN 7.
6BR7	6.3	EV-2783-9	3.0	---	P4	E	750	VARY BIAS TO VARY BEAM ANGLE.
6BS7	6.3	EV-0783-9	3.0	---	P4	E	750	CAP = G.
6BT4	6.3	JR-0207-0	0.0	80	P3	G	----	DIODE NO. 1. (SEE BELOW)
6BT4	6.3	JR-0607-0	0.0	80	P3	G	----	DIODE NO. 2. (SEE BELOW)
6BW6	6.3	EV-2783-9	3.3	---	P4	D	2600	USE ADAPTER SA-5, 1050-129. NOTE 3
6BY7	6.3	EV-2781-9	2.0	---	P4	D	2500	
6C12	6.3	EV-2613-7	3.5	---	P4	D	950	HEPTODE SECTION.
6C12	6.3	EV-9803-2	1.5	---	P4	D	2300	TRIODE SECTION.
6C18	6.3	EV-7328-0	1.0	---	P4	C	4600	PENTODE SECTION.
6C18	6.3	EV-9108-0	6.0	---	P4	D	3000	TRIODE SECTION.
6CA4	6.3	EV-0703-0	0.0	87	P3	G	----	PLATE NO. 1. NOTE 3.
6CA4	6.3	EV-0103-0	0.0	87	P3	G	----	PLATE NO. 2. NOTE 3.
6CA7	6.3	HS-5348-1	5.5	---	P4	C	3800	
6CD7	6.3	HS-4508-0	VARY	---	P5	A	----	CONNECT TWO 1 MEG. RESISTORS FROM PLATE JACK TO PINS 3 & 6, RESP., OF ANY CONVENIENT TEST SOCKET. EYE 1 CLOSURES AT BIAS OF ABOUT 5 & EYE 2 CLOSURES AT BIAS OF ABOUT 20.
6CK6	6.3	EV-2713-6	0.5	---	P4	C	6300	
6CF8	6.3	EV-9613-8	1.5	---	P4	D	1150	
6CH6	6.3	EV-2783-9	0.0	---	P4	C	6500	
6CJ5	6.3	JR-6257-0	3.0	---	P4	E	950	USE HICKOK ADAPTER SA-5, 1050-129.
6CK5	6.3	JR-6257-0	1.0	---	P4	C	6300	USE HICKOK ADAPTER SA-5, 1050-129.
6CM4	6.3	EV-2103-0	1.2	---	P4	B	8800	
6CM5	6.3	HS-5048-0	11.0	---	P4	C	5000	CAP = P.
6CN6	6.3	HS-5048-1	0.0	---	P4	B	8500	CAP = P.
6CQ6	6.3	ET-1572-6	0.7	---	P4	D	1400	
6CT7	6.3	JR-6257-4	4.4	---	P4	E	750	PENTODE SECTION.
6CT7	6.3	JR-0307-0	0.0	---	P1	C	----	DIODE SECT. USE ADAPTER SA-5, 1050-129. NOTE 3.
6CU7	6.3	JR-6257-4	3.3	---	P4	E	800	HEXODE SECTION.
6CU7	6.3	JR-4307-6	4.7	---	P4	E	950	TRIODE SECTION. USE ADAPTER SA-5, 1050-129.
6CV7	6.3	JR-3207-0	1.3	---	P4	E	790	TRIODE SECTION (SEE BELOW)
6CV7	6.3	JR-0607-0	0.0	---	P1	C	----	DIODE NO. 1. (SEE BELOW) NOTE 3.
6CV7	6.3	JR-0507-0	0.0	---	P1	C	----	DIODE NO. 2. (SEE BELOW) NOTE 3.
6CW5	6.3	EV-2793-0	4.0	---	P4	C	4500	USE HICKOK ADAPTER SA-5, 1050-129.
6CW7	6.3	EV-6907-0	3.8	---	P4	C	3750	TRIODE NO. 1.
6CW7	6.3	EV-2301-0	3.8	---	P4	C	3750	TRIODE NO. 2.
6DA5	6.3	EV-1902-0	VARY	100	P4	G	----	CONNECT A 1 MEGOHM RESISTOR FROM PLATE JACK TO OCTAL SOCKET PIN 7.
6DC8	6.3	EV-2613-9	2.6	---	P4	D	1800	VARY BIAS TO VARY BEAM ANGLE.
6DC8	6.3	EV-0803-0	0.0	---	P1	C	----	PENTODE SECTION.
								DIODE NO. 1. NOTE 3.
								SEE NEXT PAGE FOR CONTINUATION

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT. COND.	NOTATIONS
6DC8	6.3	EV-0703-0	0.0	---	P1	C	----	DIODE NO. 2. NOTE 3.
6DG7	6.3	EV-2783-9	1.0	---	P4	D	2070	
6DL4	6.3	EV-9802-0	1.3	---	P4	C	7500	
6DL5	6.3	ET-1562-0	1.0	---	P4	D	2900	
6DR8	6.3	EV-2163-9	0.0	---	P1	D	----	
6DR8	6.3	EV-0803-0	0.0	---	P1	D	----	PENTODE SECT. NOTE 3.
6DR8	6.3	EV-0703-0	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
6DS8	6.3	EV-7163-2	3.0	---	P1	E	300	DIODE NO. 2. NOTE 3.
6DS8	6.3	EV-9803-0	0.8	---	P1	E	500	HEPTODE SECT. MAKE NO GAS TEST.
6DX8	6.3	EV-8697-0	0.6	---	P4	C	6900	TRIODE SECT. MAKE NO GAS TEST.
6DX8	6.3	EV-1203-0	1.0	---	P4	D	2800	PENTODE SECTION.
6EC4	6.3	EV-0007-0	0.0	90	P3	G	----	TRIODE SECTION.
6ED4	6.3	EV-0801-0	0.0	---	P1	E	----	CAP=P. REVERSE METER. USE HICKOK ADAPTER SA-8, 1050-168. NOTE 3.
6EH7	6.3	EV-2781-9	2.4	---	P4	C	3200	CAP = G. USE HICKOK ADAPTER SA-8, 1050-168. NOTE 3.
6EJ7	6.3	EV-2781-9	1.2	---	P4	C	4900	
6ER5	6.3	ET-2567-0	0.8	---	P4	C	4500	
6ES6	6.3	ET-7652-1	0.0	---	P1	E	----	MAKE NO GAS TEST. NOTE 3.
6ES8	6.3	EV-7608-0	2.4	---	P4	C	7500	TRIODE NO. 1.
6ES8	6.3	EV-2103-0	2.4	---	P4	C	7500	TRIODE NO. 2.
6ET6	6.3	ET-1652-7	0.0	---	P1	G	----	OK ABOVE 450 ON 3000 SCALE
6EW7	6.3	EV-7608-0	5.4	---	P4	E	1200	TRIODE NO. 1.
6EW7	6.3	EV-2109-0	17.0	---	P4	C	5000	TRIODE NO. 2.
6F12	6.3	ET-1572-6	1.0	---	P4	C	3800	
6F13	6.3	JR-6257-4	1.0	---	P4	C	4750	
6F14	6.3	JR-6257-4	0.5	---	P4	C	4750	USE HICKOK ADAPTER SA-5, 1050-129.
6F16	6.3	JR-6257-0	3.0	---	P4	E	950	USE HICKOK ADAPTER SA-5, 1050-129.
6F17	6.3	JR-6257-0	3.0	---	P4	E	450	USE HICKOK ADAPTER SA-5, 1050-129
6F19	6.3	EV-2781-9	2.0	---	P4	D	2500	
6F21	6.3	ET-1572-6	0.7	---	P4	D	1400	
6F22	6.3	EV-9613-8	1.5	---	P4	D	1150	
6F26	6.3	EV-2781-9	2.0	---	P4	D	2500	
6F29	6.3	EV-2781-9	2.8	---	P4	C	3200	
6F30	6.3	EV-2781-9	1.2	---	P4	C	4900	
6F33	6.3	ET-1572-6	1.5	---	P4	D	1500	
6FC7	6.3	EV-6908-0	2.4	---	P4	C	6000	TRIODE NO. 1.
6FC7	6.3	EV-2301-0	2.4	---	P4	C	6000	TRIODE NO. 2.
6FG6	6.3	EV-1603-0	11.0	---	P4	G	----	SOLID BAR (SEE BELOW)
6FG6	6.3	EV-1603-0	0.0	---	P4	G	----	SPLIT BAR (SEE BELOW)
6FY5	6.3	ET-2501-6	1.4	---	P4	C	7000	CONNECT JUMPER BETWEEN PINS 7 & 9 OF NOVAL SOCKET. CONNECT 470K, 1/2 WATT, 10% RESISTOR BETWEEN JUMPER AND PIN 6 OF SAME SOCKET.
6G-A4	6.3	HS-1308-0	5.0	---	P4	C	6300	
6G-B3	6.3	HS-5048-0	8.0	---	P4	C	7400	CAP=P
6GB5	6.3	EV-2078-0	16.0	---	P4	C	5000	CAP = P. USE ADAPTER SA-8, 1050-168
6G-B8	6.3	HS-5348-0	4.4	---	P4	C	5600	
6GJ7	6.3	EV-2671-0	1.0	---	P4	C	4900	PENTODE SECTION.
6GJ7	6.3	EV-9803-0	4.2	---	P4	C	6100	TRIODE SECTION.
6GM8	6.3	EV-7608-0	1.8	---	P1	E	----	TRIODE NO. 1. (SEE BELOW) NOTE 3.
6GM8	6.3	EV-2103-0	1.8	---	P1	E	----	TRIODE NO. 2. (SEE BELOW) NOTE 3.
6GS7	6.3	EV-9678-0	0.4	---	P4	C	5000	NO GAS TEST. OK ABOVE DIODES OK.
6GS7	6.3	EV-1203-0	5.0	---	P4	C	3100	PENTODE SECTION.
6GV7	6.3	EV-7328-0	1.0	---	P4	C	4600	TRIODE SECTION.
6GV7	6.3	EV-9108-0	6.0	---	P4	D	3000	TRIODE SECTION.
6GV8	6.3	EV-9678-0	8.0	---	P4	C	4100	PENTODE SECTION.
6GV8	6.3	EV-2103-0	2.0	---	P4	D	2800	TRIODE SECTION.
6GW8	6.3	EV-8637-1	1.0	---	P4	C	5500	PENTODE SECTION.
6GW8	6.3	EV-1902-0	0.7	---	P4	E	550	TRIODE SECTION.
6GX8	6.3	EV-8769-3	19.0	---	P4	A	----	SOLID BAR (SEE BELOW)
								SEE NEXT PAGE FOR CONTINUATION

TUBE TYPE	FIL.	SELECTORS	HIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT. COND.	NOTATIONS
6GX8	6.3	EV-8769-3	6.0	---	P4	A	----	SPLIT BAR (SEE BELOW) PLATE VOLTS = LOW. SHORT ON POSITION 'E' NORMAL. DIODE.
6GX8	6.3	EV-0203-0	0.0	---	P1	D	----	
6HA5	6.3	ET-1507-6	1.2	---	P4	C	8000	
6H-B25	6.3	EV-2079-8	12.0	---	P4	C	4100	CAP=P. USE ADAPTER SA-8, 1050-168.
6HG8	6.3	EV-2493-0	0.8	---	P4	C	5000	PENTODE SECTION.
6HGR	6.3	EV-6703-0	8.0	---	P4	C	4000	TRIODE SECTION.
6HK8	6.3	EV-7608-9	2.0	---	P4	C	4000	TRIODE NO. 1.
6HK8	6.3	EV-2103-9	2.0	---	P4	C	4000	TRIODE NO. 2.
6HU6	6.3	EV-1603-0	6.0	---	P4	G	----	SOLID BAR (SEE BELOW)
6HU6	6.3	EV-1603-0	0.0	---	P4	G	----	SPLIT BAR (SEE BELOW) CONNECT JUMPER BETWEEN PINS 7 & 9 OF NOVAL SOCKET. CONNECT 100K, 1/2 WATT, 10% RESISTOR BETWEEN JUMPER AND PIN 6 OF SAME SOCKET.
6HU8	6.3	EV-2317-0	2.0	---	P4	H	3300	PENTODE NO. 1.
6HU8	6.3	EV-6897-0	2.0	---	P4	D	3300	PENTODE NO. 2.
6JV6	6.3	R3-X732-W	15.0	---	P4	C	7500	MODEL 539A# NOTE 7.
6JW8	6.3	EV-2637-0	1.6	---	P4	D	2400	PENTODE SECTION.
6JW8	6.3	EV-9108-0	1.1	---	P4	D	2200	TRIODE SECTION.
6JX8	6.3	EV-2673-1	0.4	---	--	E	750	HEPTODE SECTION. HOLD DOWN P1 AND PRESS P4.
6JX8	6.3	EV-9803-0	0.2	---	P4	D	2025	TRIODE SECTION. PLATE VOLTS = LOW.
6KG6	6.3	FV-1039-2	27.0	---	P4	D	2600	CAP=P. USE ADAPTER. SA-8, 1050-168
6KH8	6.3	EV-2397-0	2.0	---	P4	C	3400	PENTODE NO. 1. NOTE 8# 6-, 7+.
6KH8	6.3	EV-5897-0	2.0	---	P4	C	3400	PENTODE NO. 2. NOTE 8# 2-, 7+.
6KH8	6.3	EV-2107-0	2.0	---	P4	F	80	TRIODE SECTION.
6KN8	6.3	EV-7608-0	2.2	---	P4	B	7900	TRIODE NO. 1.
6KN8	6.3	EV-2103-0	2.2	---	P4	B	7900	TRIODE NO. 2.
6KW6	6.3	FV-1637-0	12.0	---	P4	D	2600	USE HICKOK ADAPTER SA-8, 1050-168.
6L12	6.3	EV-7608-9	1.6	---	P4	D	2500	TRIODE NO. 1.
6L12	6.3	EV-2103-9	1.6	---	P4	D	2500	TRIODE NO. 2.
6L13	12.6	EV-7608-0	1.3	---	P4	D	875	TRIODE NO. 1.
6L13	12.6	EV-2103-0	1.3	---	P4	D	875	TRIODE NO. 2.
6L34	6.3	ET-1705-0	0.8	---	P4	C	5300	
6LD3	6.3	JR-3207-0	1.3	---	P4	E	790	TRIODE SECTION. (SEE BELOW)
6LD3	6.3	JR-0607-0	0.0	---	P1	C	----	DIODE NO. 1. (SEE BELOW) NOTE 3.
6LD3	6.3	JR-0507-0	0.0	---	P1	C	----	DIODE NO. 2. (SEE BELOW) NOTE 3.
6LD12	6.3	EV-8907-0	1.3	---	P4	E	750	TRIODE SECTION.
6LD12	6.3	EV-0607-0	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
6LD12	6.3	EV-0203-0	0.0	---	P1	E	----	DIODE NO. 2. NOTE 3.
6LD12	6.3	EV-0107-0	0.0	---	P1	E	----	DIODE NO. 3. NOTE 3.
6LD13	6.3	EV-2103-0	1.3	---	P4	E	790	TRIODE SECTION.
6LD13	6.3	EV-0603-0	0.0	---	P1	C	----	DIODE NO. 1. NOTE 3.
6LD13	6.3	EV-0803-0	0.0	---	P1	C	----	DIODE NO. 2. NOTE 3.
6LF6	6.3	R3-5032-4	23	---	P4	C	5200	CAP=P. NOTE 7
6LN8	6.3	EV-2637-1	1.2	---	P4	C	3000	PENTODE SECTION.
6LN8	6.3	FV-9108-6	4.8	---	P4	C	3000	TRIODE SECTION.
6LV6	6.3	R3-5032-4	23	---	P4	C	5200	CAP=P. NOTE 7
6LX8	6.3	EV-2637-0	1.6	---	P4	D	2400	PENTODE SECTION.
6LX8	6.3	EV-9108-0	1.1	---	P4	D	2200	TRIODE SECTION.
6M5	6.3	EV-2713-0	1.0	---	P4	C	6300	
6MG8	6.3	EV-2637-0	1.0	---	P4	D	2500	PENTODE SECTION.
6MG8	6.3	EV-9108-0	1.0	---	P4	C	4700	TRIODE SECTION.
6M-HH3	6.3	ET-6107-0	1.5	---	P4	C	5500	TRIODE NO. 1.
6M-HH3	6.3	ET-5207-0	1.5	---	P4	C	5500	TRIODE NO. 2.
6N3	6.3	EV-0903-0	0.0	90	P3	G	----	NOTE 3.
6N-H10	6.3	DR-4208-0	2.0	---	P4	F	1700	1050-127. NOTE 7
6N-H10	6.3	13-4208-7	2.0	---	P4	E	1700	MODEL 539B USING ADAPTER SA-3,
6N-L7	6.3	DR-4208-0	9.0	---	P4	E	1150	MODEL 539C# NO ADAPTER REQUIRED. PLATE VOLTS=LOW. USE ADAPTER SA-3, 1050-127 OR CA-4, 1050-135. NOTE 7
SEE NEXT PAGE FOR CONTINUATION								

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
6N-L7	6.3	13-420R-0	9.0	---	P4	E	1150	539C, NO ADAPTER REQUIRED
6PL12	6.3	EV-3672-0	7.4	---	P4	D	2700	PENTODE SECTION.
6PL12	6.3	EV-1908-0	0.6	---	P4	E	1350	TRIODE SECTION.
6R3	6.3	EV-0009-0	0.0	90	P3	G	----	CAP = P. REVERSE METER. NOTE 3.
6R-HH2	6.3	EV-7608-9	2.0	---	P4	C	4000	TRIODE NO. 1.
6R-HH2	6.3	EV-2103-9	2.0	---	P4	C	4000	TRIODE NO. 2.
6R-HH8	6.3	EV-7608-0	2.2	---	P4	B	7900	TRIODE NO. 1.
6R-HH8	6.3	EV-2103-0	2.2	---	P4	B	7900	TRIODE NO. 2.
6R-K19	6.3	EV-0009-0	0.0	50	P1	G	----	CAP = P. REVERSE METER. NOTE 3.
6R-P15	6.3	EV-1793-0	1.0	---	P4	C	5000	
6R-P22	6.3	EV-2631-7	1.0	---	P4	D	2350	
6S2A	6.3	ES-0000-0	0.0	14	P5	G	----	CAP=P. NOTE 3
6U9	6.3	FW-W901-0	4.5	---	P4	C	3150	TRIODE SECTION.
6U9	6.3	FW-3782-4	1.5	---	P4	C	4400	PENTODE SECTION. USE ADAPTER SA-11
6V9	6.3	FW-3741-2	1.0	---	--	E	700	MODEL 539B# USE SA-11 & CA-4.
6V9	6.3	FW-8W09-0	2.4	---	P4	C	3150	NOTE 7.
6X4	6.3	ET-0607-1	0.0	85	P3	G	----	HEPTODE SECTION. HOLD DOWN P1 &
6X4	6.3	ET-0107-6	0.0	85	P3	G	----	PRESS P4. USE ADAPTER SA-11. MODEL
6X5	6.3	HS-0508-1	0.0	85	P3	G	----	539B# USE SA-11 & CA-4. NOTE 7.
6X5	6.3	HS-0308-1	0.0	85	P3	G	----	
6X6	6.3	HS-5408-6	40.0	100	P5	G	----	TRIODE SECTION.
6X6	6.3	HS-5438-6	40.0	100	P5	G	----	PLATE NO. 1. NOTE 3.
6X9	6.3	FW-3782-4	1.5	---	P4	C	4700	PLATE NO. 2. NOTE 3.
6X9	6.3	FW-W901-0	1.2	---	P4	D	3000	PLATE NO. 1. NOTE 3.
6Y9	6.3	FW-8W97-0	2.2	---	P4	C	6300	PLATE NO. 2. NOTE 3.
6Y9	6.3	FW-1432-0	1.0	---	P4	C	5300	EYES OPEN.
7AN7	7.5	EV-6907-0	3.8	---	P4	C	3750	EYES CLOSED.
7AN7	7.5	EV-2301-0	3.8	---	P4	C	3750	PENTODE SECTION. USE ADAPTER SA-11
7D9	6.3	ET-1572-0	5.3	---	P4	D	1650	MODEL 539B# USE SA-11 & CA-4.
7ES8	7.5	EV-7608-0	2.4	---	P4	C	7500	NOTE 7.
7ES8	7.5	EV-2103-0	2.4	---	P4	C	7500	TRIODE SECTION.
7F16	6.3	JR-6257-0	3.0	---	P4	E	950	PENTODE NO. 2.
7FC7	7.5	EV-6908-0	2.4	---	P4	C	6000	USE HICKOK ADAPTER SA-5,1050-129.
7FC7	7.5	EV-2301-0	2.4	---	P4	C	6000	TRIODE NO. 1.
7GS7	7.5	EV-9678-0	0.4	---	P4	C	5000	TRIODE NO. 2.
7GS7	7.5	EV-1203-0	5.0	---	P4	C	3100	PENTODE SECTION.
7GV7	7.5	EV-7328-0	1.0	---	P4	C	4600	
7GV7	7.5	EV-9108-0	6.0	---	P4	D	3000	TRIODE SECTION.
7HG8	7.5	EV-2893-0	0.8	---	P4	C	5050	PENTODE SECTION.
7HG8	7.5	EV-6703-0	8.0	---	P4	C	4000	TRIODE SECTION.
8A8	10.0	EV-2637-1	1.2	---	P4	C	3000	
8A8	10.0	EV-9108-6	4.8	---	P4	C	3000	PENTODE SECTION.
8AVLL	7.5	B3-9W04-0	3.0	---	P4	E	1600	TRIODE SECTION.
8AVLL	7.5	B3-7506-0	3.0	---	P4	E	1600	TRIODE NO. 1. MODEL 539B# NOTE 7.
8AVLL	7.5	B3-X203-0	3.0	---	P4	E	1600	TRIODE NO. 2.
8B8	7.5	EV-3672-0	7.4	---	P4	D	2700	TRIODE NO. 3.
8B8	7.5	EV-1908-0	0.6	---	P4	E	1350	
8CW5	7.5	EV-2793-0	4.0	---	P4	C	4500	PENTODE SECTION.
8D3	6.3	ET-1572-6	1.0	---	P4	C	3800	TRIODE SECTION.
8D5	6.3	EV-2783-9	3.0	---	P4	E	750	
8D6	6.3	EV-2781-9	0.5	---	P4	C	4500	
8D7	6.3	EV-0783-9	3.0	---	P4	E	750	CAP = G.
8D8	6.3	EV-9613-8	1.5	---	P4	D	1150	
8DX8	7.5	EV-8697-0	0.6	---	P4	C	6900	PENTODE SECTION.
8DX8	7.5	EV-1203-0	1.0	---	P4	D	2800	TRIODE SECTION.
8GJ7	7.5	EV-2671-0	1.0	---	P4	C	4900	
								PENTODE SECTION.
								SEE NEXT PAGE FOR CONTINUATION

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
8GJ7	7.5	EV-9803-0	4.2	---	P4	C	6100	TRIODE SECTION.
8K11	7.5	R3-9W04-8	3.2	---	P4	D	1950	TRIODE NO. 1. MODEL 539B# NOTE 7.
8K11	7.5	R3-7506-8	1.3	---	P4	E	800	TRIODE NO. 2.
8K11	7.5	R3-X203-3	1.3	---	P4	E	800	TRIODE NO. 3.
8LS6	7.5	EV-2781-3	5.0	---	P4	C	5300	
8U9	7.5	FW-3782-4	1.5	---	P4	C	4400	PENTODE SECTION. USE ADAPTER SA-11 MODEL 539B# USE SA-11 & CA-4. NOTE 7.
8U9	7.5	FW-W901-0	4.5	---	P4	C	3150	TRIODE SECTION.
8X9	7.5	FW-3782-4	1.5	---	P4	C	4700	PENTODE SECTION. USE ADAPTER SA-11 MODEL 539B# USE SA-11 & CA-4. NOTE 7.
8X9	7.5	FW-W901-0	1.2	---	P4	D	3000	TRIODE SECTION.
9A8	10.0	EV-2637-1	1.2	---	P4	C	3000	PENTODE SECTION.
9A8	10.0	EV-9108-6	4.8	---	P4	C	3000	TRIODE SECTION.
9AB4	10.0	ET-6107-0	1.6	---	P4	D	2500	
9AK8	10.0	EV-8907-6	1.3	---	P4	E	750	TRIODE SECTION.
9AK8	10.0	EV-0607-1	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
9AK8	10.0	EV-0203-7	0.0	---	P1	E	----	DIODE NO. 2. NOTE 3.
9AK8	10.0	EV-0107-8	0.0	---	P1	E	----	DIODE NO. 3. NOTE 3.
9AQ8	10.0	EV-7608-9	1.6	---	P4	D	2500	TRIODE NO. 1.
9AQ8	10.0	EV-2103-9	1.6	---	P4	D	2500	TRIODE NO. 2.
9BR8	10.0	EV-9678-0	0.8	---	P4	D	2400	PENTODE SECTION.
9BR8	10.0	EV-1203-0	1.0	---	P4	C	5350	TRIODE SECTION.
9BW6	10.0	EV-2783-9	3.3	---	P4	D	2600	
9CG8A	10.0	EV-9678-0	1.2	---	P4	C	2900	PENTODE SECTION.
9CG8A	10.0	EV-1203-0	2.0	---	P4	C	3650	TRIODE SECTION.
9D6	6.3	ET-1572-6	0.7	---	P4	D	1400	
9ED4	7.5	EV-0801-0	0.0	---	P1	E	----	CAP = G. USE HICKOK ADAPTER SA-8, 1050-168. NOTE 3.
9GH8A	10.0	EV-2637-0	1.7	---	P4	D	2500	PENTODE SECTION.
9GH8A	10.0	EV-9108-0	1.3	---	P4	C	5300	TRIODE SECTION.
9GV8	10.0	EV-9678-0	8.0	---	P4	C	4100	PENTODE SECTION.
9GV8	10.0	EV-2103-0	2.0	---	P4	D	2800	TRIODE SECTION.
9J6	10.0	ET-5207-0	1.8	---	P4	C	3340	TRIODE NO. 1
9J6	10.0	ET-6107-0	1.8	---	P4	C	3340	TRIODE NO. 2
9JW8	10.0	EV-2637-0	1.6	---	P4	D	2400	PENTODE SECTION.
9JW8	10.0	EV-9108-0	1.1	---	P4	D	2200	TRIODE SECTION.
9V9	10.0	FW-3741-2	1.0	---	--	E	700	HEPTODE SECTION. HOLD DOWN P1 & PRESS P4. USE ADAPTER SA-11. MODEL 539B# USE SA-11 & CA-4. NOTE 7.
9V9	10.0	FW-8W09-0	2.4	---	P4	C	3150	TRIODE SECTION.
10C14	20.0	EV-2613-7	3.5	---	P4	D	950	HEPTODE SECTION.
10C14	20.0	EV-9803-2	1.5	---	P4	D	2300	TRIODE SECTION.
10CW5	10.0	EV-2793-0	4.0	---	P4	C	4500	
10D2	20.0	ET-0701-6	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
10D2	20.0	ET-0205-6	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
10DX8	10.0	EV-8697-0	0.6	---	P4	C	6900	PENTODE SECTION.
10DX8	10.0	EV-1203-0	1.0	---	P4	D	2800	TRIODE SECTION.
10FD12	20.0	EV-2613-9	2.6	---	P4	D	1800	PENTODE SECTION.
10FD12	20.0	EV-0803-0	0.0	---	P1	C	----	DIODE NO. 1. NOTE 3.
10FD12	20.0	EV-0705-0	0.0	---	P1	C	----	DIODE NO. 2. NOTE 3.
10GV8	10.0	EV-9678-0	8.0	---	P4	C	4100	PENTODE SECTION.
10GV8	10.0	EV-2103-0	2.0	---	P4	D	2800	TRIODE SECTION.
10LD3	12.6	JR-3207-0	1.3	---	P4	E	790	TRIODE SECTION (SEE BELOW)
10LD3	12.6	JR-0607-0	0.0	---	P1	C	----	DIODE NO. 1. (SEE BELOW) NOTE 3.
10LD3	12.6	JR-0507-0	0.0	---	P1	C	----	DIODE NO. 2. (SEE BELOW) NOTE 3. USE HICKOK ADAPTER SA-5, 1050-129.
10LD12	25.0	EV-8907-0	1.3	---	P4	E	750	TRIODE SECTION.
10LD12	25.0	EV-0607-0	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
10LD12	25.0	EV-0203-0	0.0	---	P1	E	----	DIODE NO. 2. NOTE 3.
10LD12	25.0	EV-0107-0	0.0	---	P1	E	----	DIODE NO. 3. NOTE 3.
10LD13	12.6	EV-2103-0	1.3	---	P4	E	790	TRIODE SECTION.
10LD13	12.6	EV-0603-0	0.0	---	P1	C	----	DIODE NO. 1. NOTE 3.
SEE NEXT PAGE FOR CONTINUATION								

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT. COND.	NOTATIONS
10LD13	12.6	EV-0803-0	0.0	---	P1	C	----	DIODE NO. 2. NOTE 3.
10LD14	25.0	EV-7608-9	1.6	---	P4	D	2500	TRIODE NO. 1.
10LD14	25.0	EV-2103-9	1.6	---	P4	D	2500	TRIODE NO. 2.
10P18	50.0	EV-2793-0	4.0	---	P4	C	4500	
10PL12	50.0	EV-3672-0	7.4	---	P4	D	2700	PENTODE SECTION.
10PL12	50.0	EV-1908-0	0.6	---	P4	E	1350	TRIODE SECTION.
11AF9	12.6	FW-8W97-0	2.2	---	P4	C	6300	PENTODE NO. 1. USE ADAPTER SA-11.
11AF9	12.6	FW-1432-0	1.0	---	P4	C	5300	MODEL 5398# NOTE 7.
11AF9	12.6	FW-1432-0	1.0	---	P4	C	5300	PENTODE NO. 2.
11BM8	10.0	EV-3672-0	7.4	---	P4	D	2700	PENTODE SECTION.
11BM8	10.0	EV-1908-0	0.6	---	P4	E	1350	TRIODE SECTION.
11R3	10.0	EV-0009-0	0	90	P3	F	----	CAP=P. REVERSE METER. NOTE 1.
11Y9	10.0	FW-8W97-0	2.2	---	P4	C	6300	PENTODE NO. 1. USE ADAPTER SA-11.
11Y9	10.0	FW-1432-0	1.0	---	P4	C	5300	MODEL 5398# USE SA-11 & CA-4.
11Y9	10.0	FW-1432-0	1.0	---	P4	C	5300	NOTE 7.
11Y9	10.0	FW-1432-0	1.0	---	P4	C	5300	PENTODE NO. 2.
12AC5	12.6	JR-6257-0	3.0	---	P4	E	950	USE HICKOK ADAPTER SA-5, 1050-129.
12AJ7	12.6	EV-2613-7	3.5	---	P4	D	950	HEPTODE SECTION.
12AJ7	12.6	EV-9803-2	1.5	---	P4	D	2300	TRIODE SECTION.
12B-B14	12.6	EV-1063-0	23.0	---	P4	D	2800	CAP=P. USE ADAPTER SA-8, 1050-168.
12BR3	12.6	EV-0009-0	0.0	50	P1	G	----	CAP = P. REVERSE METER. NOTE 3.
12BX6	12.6	EV-2781-9	0.5	---	P4	C	4500	
12DA6	12.6	EV-2783-9	2.2	---	P4	D	1900	
12DW4A	12.6	EV-0209-0	0.0	82	P3	G	----	USE ADAPTER SA-4, 1050-144 OR CA-4
12F07	12.6	EV-7608-0	3.7	---	P4	D	1640	1050-135 WITH MODEL 5398. MODEL
12F07	12.6	EV-2103-0	3.7	---	P4	D	1640	539C REQUIRES NO ADAPTER. NOTE 3.
12G83	12.6	HS-5048-0	8.0	---	P4	C	7400	TRIODE NO. 1.
12G-K17	12.6	HY-0503-0	0.0	89	P3	G	----	TRIODE NO. 2.
12H-B25	12.6	EV-2079-8	12.0	---	P4	C	4100	CAP = P.
12HU8	12.6	EV-2317-0	2.0	---	P4	D	3300	NOTE 3.
12HU8	12.6	EV-6897-0	2.0	---	P4	D	3300	CAP=P. USE ADAPTER SA-8, 1050-168.
12RK19	12.6	EV-0009-0	0.0	50	P1	G	----	PENTODE NO. 1.
12S7	12.6	JR-6257-4	4.4	---	P4	E	750	PENTODE NO. 2.
12S7	21.6	JR-0307-0	0.0	---	P1	C	----	CAP = P. REVERSE METER. NOTE 3.
13CM5	12.6	HS-5048-0	11.0	---	P4	C	5000	PENTODE SECTION. USE HICKOK
13D1	25.0	HY-4506-2	3.7	---	P4	D	1640	ADAPTER SA-5, 1050-129.
13D1	25.0	HY-1203-5	3.7	---	P4	D	1640	DIODE SECTION. NOTE 3.
13D2	6.3	HY-4506-2	3.7	---	P4	D	1640	CAP = P.
13D2	6.3	HY-1203-5	3.7	---	P4	D	1640	TRIODE NO. 1.
13GB5	12.6	EV-2078-0	16.0	---	P4	C	5000	TRIODE NO. 2.
14GW8	12.6	EV-8637-0	1.0	---	P4	C	5500	CAP=P. USE ADAPTER SA-8, 1050-168.
14GW8	12.6	EV-1902-0	0.7	---	P4	E	550	PENTODE SECTION.
14K7	12.6	JR-6257-4	3.3	---	P4	E	800	TRIODE SECTION.
14K7	12.6	JR-4307-6	4.7	---	P4	E	950	HEXODE SECTION.
14L7	12.6	JR-3207-0	1.3	---	P4	E	790	TRIODE SECTION. USE ADAPTER SA-5,
14L7	12.6	JR-0607-0	0.0	---	P1	C	----	1050-129.
14L7	12.6	JR-0507-0	0.0	---	P1	C	----	TRIODE SECTION.
15CW5	12.6	EV-2793-0	8.0	---	P4	C	6300	DIODE NO. 1. NOTE 3.
15D08	12.6	EV-8697-0	0.6	---	P4	C	6900	
15D08	12.6	EV-1203-0	1.0	---	P4	D	2800	DIODE NO. 2. USE ADAPTER SA-5,
15EW7	12.6	EV-7608-0	5.4	---	P4	E	1200	1050-129. NOTE 3.
15EW7	12.6	EV-2109-0	17.0	---	P4	C	5000	SET POWER ADJUST AT 114V.
16A5	20.0	EV-2793-0	6.0	---	P4	D	3500	PENTODE SECTION.
16A8	20.0	EV-3672-0	7.2	---	P4	D	3100	TRIODE SECTION.
16A8	20.0	EV-1908-0	0.5	---	P4	D	1650	TRIODE SECTION.
16AQ3	12.6	EV-0009-0	0.0	89	P3	G	----	REVERSE METER. CAP = P. NOTE 3.

TUBE TYPE	FIL.	SELEKTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT. COND.	NOTATIONS
16H85	20.0	B3-X72W-0	3.2	---	P4	C	4250	SET =POWER ADJUST= AT 80V. MODEL 539B# NOTE 7.
16JV6	20.0	B3-X732-X	15.0	---	P4	C	4700	SET =POWER ADJUST= AT 80V. MODEL 539B# NOTE 7.
16LU8A	20.0	B3-6489-0	10.0	---	P4	C	3500	PENTODE SECTION. NOTE 7. SET =POWER ADJUST= AT 80V.
16LU8A	20.0	B3-W20X-0	3.6	---	P4	F	650	TRIODE SECT.
16Y9	20.0	FW-8497-0	1.4	---	P4	C	6300	PENTODE NO. 1. USE ADAPTER SA-11. MODEL 539B# USE SA-11 & CA-4. NOTE 7. SET POWER ADJUST AT 90 V.
16Y9	20.0	FW-1432-0	0.5	---	P4	C	5300	PENTODE NO. 2.
17A8	20.0	EV-2637-0	1.2	---	P4	C	3000	PENTODE SECTION (SEE BELOW)
17A8	20.0	EV-9108-0	4.8	---	P4	C	3000	TRIODE SECTION (SEE BELOW)
17A89	20.0	FW-978W-0	1.5	---	P4	C	3500	SET CATH ACT SWITCH TO TEST. TETRODE NO. 1. USE ADAPTER SA-11. MODEL 539B# USE SA-11 & CA-4. NOTE 7. SET POWER ADJUST AT 85 V.
17A89	20.0	FW-3124-0	1.5	---	P4	C	3500	TETRODE NO. 2.
17B-814	20.0	EV-1063-0	23.0	---	P4	D	2800	CAP = P. SET 'POWER ADJUST' AT 87V USE HICKOK ADAPTER SA-8, 1050-168.
17BR3	20.0	EV-0009-0	0.0	90	P3	G	----	CAP = P. REVERSE METER. SET 'POWER ADJUST' AT 90V. NOTE 3.
17C8	20.0	FV-2613-9	0.9	---	P4	F	1400	PENTODE SECTION.
17C8	20.0	EV-0703-0	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
17C8	20.0	EV-0803-0	0.0	---	P1	D	----	DIODE NO. 2. NOTE 3.
17DW4A	20.0	EV-0209-0	0.0	90	P3	G	----	SET POWER ADJUST AT 90V. NOTE 3. USE ADAPTER SA-4, 1050-144 OR CA-4 1050-135 WITH MODEL 539B. MODEL 539C REQUIRES NO ADAPTER.
17EW8	20.0	EV-7608-0	1.5	---	P4	C	3600	TRIODE NO. 1.
17EW8	20.0	EV-2103-0	1.5	---	P4	C	3600	TRIODE NO. 2.
17H-B25	20.0	EV-2079-8	12.0	---	P4	C	4100	CAP=P. USE ADAPTER SA-8, 1050-168.
17KW6	20.0	EV-1637-0	12.0	---	P4	C	2600	SET =POWER ADJUST AT 90V. SET CATH. ACT TO TEST POSITION. USE HICKOK ADAPTER SA-8, 1050-168.
17R-K19	20.0	EV-0009-0	0.0	90	P3	G	----	CAP = P. REVERSE METER. SET POWER ADJUST AT 90V. NOTE 3.
17Z3	20.0	EV-0009-0	0.0	---	P3	F	----	CAP = P. REVERSE METER. NOTE 3.
18G85	20.0	FV-2078-0	16.0	---	P4	C	5000	CAP=P. USE ADAPTER SA-8, 1050-168.
18GV8	20.0	EV-9678-0	8.0	---	P4	C	4100	PENTODE SECTION.
18GV8	20.0	EV-2103-0	2.0	---	P4	D	2400	TRIODE SECTION.
18J6	20.0	ET-5207-0	1.8	---	P4	C	3340	TRIODE NO. 1.
18J6	20.0	ET-6107-0	1.8	---	P4	C	3340	TRIODE NO. 2.
19AJ8	20.0	FV-2613-7	3.5	---	P4	D	950	HEPTODE SECTION.
19AJ8	20.0	EV-9803-2	1.5	---	P4	D	2300	TRIODE SECTION.
19AQ5	20.0	ET-1562-0	2.1	---	P4	D	2600	
19BR5	20.0	EV-1902-0	VARY	100	P4	G	----	CONNECT A 1 MEGOHM RESISTOR FROM PLATE JACK TO OCTAL SOCKET PIN 7. VARY BIAS TO VARY BEAM ANGLE.
19BX6	20.0	EV-2781-9	0.5	---	P4	C	4500	
19BY7	20.0	FV-2781-9	2.0	---	P4	D	2500	
19D8	20.0	EV-2613-7	3.5	---	P4	D	950	HEPTODE SECTION.
19D8	20.0	EV-9803-2	1.5	---	P4	D	2300	TRIODE SECTION.
19EW7	20.0	EV-7608-0	5.4	---	P4	E	1200	TRIODE NO. 1.
19EW7	20.0	EV-2109-0	17.0	---	P4	C	5000	TRIODE NO. 2.
19FL8	20.0	EV-2613-9	2.6	---	P4	D	1800	PENTODE SECTION.
19FL8	20.0	EV-0803-0	0.0	---	P1	C	----	DIODE NO. 1. NOTE 3.
19FL8	20.0	EV-0703-0	0.0	---	P1	C	----	DIODE NO. 2. NOTE 3.
19G3	4.3	HS-0000-0	0.0	---	P3	G	----	CAP = P. NOTE 3.
19KF6	20.0	EV-7963-2	20.0	---	P4	C	4400	USE HICKOK ADAPTER SA-8, 1050-168.
20A3	6.3	ET-1602-5		89	P5	G	----	STRIKES AT ABOUT 1.8V. NOTE 2.
20AQ3	20.0	EV-0009-0	0.0	89	P3	G	----	CAP = P. REVERSE METER. NOTE 3.
20EW7	20.0	EV-7608-0	5.4	---	P4	E	1200	TRIODE NO. 1.
20EW7	20.0	EV-2109-0	17.0	---	P4	C	5000	TRIODE NO. 2.
20LF6	20.0	B3-5032-4	23.0	---	P4	C	5200	CAP=P. MODEL 539B# NOTE 7.
21KQ6	20.0	EV-8039-2	7.0	---	P4	C	5700	CAP = P. PLATE VOLTS = LOW. USE HICKOK ADAPTER SA-8, 1050-168.

TUBE TYPE	FIL.	SELECTURE	FIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUL. COND.	NOTATIONS
23JS6A	25.0	B3-5032-4	25.0	---	P4	C	3150	CAP = P. NOTE 7.
25B-R14	25.0	EV-1063-0	23	---	P4	D	2800	CAP=P. USE ADAPTER SA-8, 1050-168.
25HR3	25.0	EV-0009-0	0.0	50	P1	G	----	CAP = P. REVERSE METER. NOTE 3.
25E5	25.0	HS-5048-0	11.0	---	P4	C	5000	CAP = P.
25H-B25	25.0	EV-2079-8	12.0	---	P4	C	4100	CAP=P. USE ADAPTER SA-8, 1050-168.
25HX5	25.0	EV-7963-0	15.0	---	P4	C	4100	USE ADAPTER SA-8, 1050-168.
25R-K19	25.0	EV-0009-0	0.0	50	P1	G	----	CAP = P. REVERSE METER. NOTE 3.
26A08	25.0	EV-7608-9	1.6	---	P4	D	2500	TRIODE NO. 1.
26A08	25.0	EV-2103-9	1.6	---	P4	D	2500	TRIODE NO. 2.
26D05	25.0	HS-1043-0	26.0	---	P4	D	3000	CAP=P.
27GB5	25.0	EV-2078-0	16.0	---	P4	C	5000	CAP=P. USE ADAPTER SA-8, 1050-168.
27KG6	25.0	EV-1039-2	27.0	---	P4	D	2600	CAP=P. USE ADAPTER SA-8, 1050-168.
27LF6	25.0	B3-5032-4	23.0	---	P4	C	5200	CAP=P. MODEL 539H# NOTE 7.
28AK8	25.0	EV-8907-0	1.3	---	P4	E	750	TRIODE SECTION.
28AK8	25.0	EV-0607-0	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
28AK8	25.0	EV-0203-0	0.0	---	P1	F	----	DIODE NO. 2. NOTE 3.
28AK8	25.0	EV-0107-0	0.0	---	P1	F	----	DIODE NO. 3. NOTE 3.
28EC4	25.0	EV-0007-0	0.0	90	P3	G	----	CAP = P. REVERSE METER. USE ADAPTER SA-8, 1050-168. NOTE 3.
29K06	25.0	EV-8039-2	7.0	---	P4	C	5700	CAP = P. PLATE VOLTS = LOW.
30A5	35.0	KT-2761-0	4.0	---	P4	C	4500	USE HICKOK ADAPTER SA-8, 1050-168. BEFORE PLACING TUBE IN SOCKET, COUNT COUNTERCLOCKWISE AND JUMPER A 33 OHM, 2 WATT RESISTOR BETWEEN PINS 4 & 9 OF 9 PIN MIN. SOCKET.
30AE3	25.0	EV-0009-0	0.0	89	P3	G	----	CAP = P. REVERSE METER. NOTE 3.
30C1	10.0	EV-2637-1	1.2	---	P4	C	3000	PENTODE SECTION
30C1	10.0	EV-9108-6	4.8	---	P4	C	3000	TRIODE SECTION.
30CW5	25.0	EV-2793-0	8.0	---	P4	C	6300	
30L1	7.3	EV-6907-0	3.8	---	P4	C	3750	TRIODE NO. 1.
30L1	7.3	EV-2301-0	3.8	---	P4	C	1750	TRIODE NO. 2.
30PL12	12.6	EV-3672-0	7.2	---	P4	D	3100	PENTODE SECTION
30PL12	12.6	EV-1908-0	0.5	---	P4	D	1650	TRIODE SECTION
31A3	35.0	RY-0207-0	0.0	82	P3	G	----	SET POWER ADJUST TO 85V. USE ADAPTER SA-5, 1050-129. NOTE 3.
31AV3	35.0	EV-0903-0	0.0	82	P3	G	----	SET POWER ADJUST TO 85V. NOTE 3.
32A8	35.0	EV-3672-0	7.4	---	P4	D	2700	PENTODE SECTION.
32A8	35.0	EV-1908-0	0.6	---	P4	F	1350	TRIODE SECTION.
34R3	35.0	EV-0009-0	0.0	90	P3	G	----	CAP = P. REVERSE METER. NOTE 3.
3505	35.0	EV-1623-0	1.5	---	---	C	3650	HOLD DOWN P1 AND PRESS P4.
38A3	35.0	EV-0903-0	0.0	88	P3	C	---	NOTE 3.
40KG6	35.0	EV-1039-2	27.0	---	P4	D	2600	CAP=P. USE ADAPTER SA-8, 1050-168.
42EC4	50.0	EV-0007-0	0.0	90	P3	G	---	CAP = P. METER REVERSE USE HICKOK ADAPTER SA-8, 1050-168. NOTE 3.
45A5	50.0	JR-6257-0	1.0	---	P4	C	6300	USE HICKOK ADAPTER SA-5, 1050-129.
45B5	50.0	EV-2793-0	4.0	---	P4	C	4500	
50BM8	50.0	EV-3672-0	7.4	---	P4	D	2700	PENTODE SECTION.
50BM8	50.0	EV-1908-0	0.6	---	P4	F	1350	TRIODE SECTION.
50E5	50.0	HS-5048-0	11.0	---	P4	C	5000	CAP = P.
50JY6	50.0	HS-5048-3	15.0	---	P4	C	4100	CAP = P.
85A1	OFF	AP-0208-0	---	---	P4	H	85V	STARTS AT ABOUT 120V. REGULATION = 3 VOLTS FROM 1 TO 8MA.
85A2	OFF	AP-0102-0	---	---	P4	H	85V	STARTS AT ABOUT 125V. REGULATION = 3 VOLTS FROM 1 TO 10MA.
90C1	OFF	AP-0507-0	---	---	P4	H	90V	REGULATION = 14 VOLTS, 1 TO 40 MA.
95A1	OFF	AP-0501-0	---	---	P4	H	95V	REGULATION = 5 VOLTS, 2 TO 10 MA. CONNECT A 470K RESISTOR BETWEEN PINS 1, 4, ANY SOCKET ON TESTER.
108C1	OFF	AP-0502-0	---	---	P4	H	108V	STARTS AT ABOUT 115V. REGULATION = 2 VOLTS FROM 5 TO 30 MA.
150B2	OFF	AP-0102-0	---	---	P4	H	150V	STARTS UNDER 180V. REGULATION = 5 VOLTS FROM 5 TO 15 MA.
150C2	OFF	AP-0502-0	---	---	P4	H	150V	STARTS AT ABOUT 155V REGULATION = 2 VOLTS FROM 5 TO 30 MA.

TUBE TYPE	FIL.	SELECTIONS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT. COND.	NOTATIONS
5894	12.6	HR-6034-0	5.6	---	P4	D	2400	PLATE NO. 1. USE HICKOK ADAPTER, SA-6, 1050-107. NOTE # 2-, 4+, & CONNECT PLATE JACK TO RIGHT CAP.
5894	12.6	HR-2034-0	5.6	---	P4	D	2400	PLATE NO. 2. USE HICKOK ADAPTER, SA-6, 1050-107. NOTE # 6-, 4+, & CONNECT PLATE JACK TO LEFT CAP.
5911	0.6	DV-4120-0	5.7	---	P4	F	65	NOTE 6.
5913	1.1	DV-4120-0	4.4	---	P4	F	260	NOTE 6.
5920	6.3	ET-5207-0	4.8	---	P4	D	3150	TRIODE NO. 1.
5920	6.3	ET-6107-0	4.8	---	P4	D	3150	TRIODE NO. 2.
6042	25.0	HY-4506-2	3.7	---	P4	D	1640	TRIODE NO. 1.
6042	25.0	HY-1203-5	3.7	---	P4	D	1540	TRIODE NO. 2.
6057	12.6	EV-7608-0	1.3	---	P4	D	875	TRIODE NO. 1.
6057	12.6	EV-2103-0	1.3	---	P4	D	875	TRIODE NO. 2.
6059	6.3	EV-2783-9	3.0	---	P4	F	750	
6060	12.6	EV-7608-0	1.6	---	P4	D	2500	TRIODE NO. 1.
6060	12.6	EV-2103-0	1.6	---	P4	D	2500	TRIODE NO. 2.
6061	6.3	EV-2783-9	3.3	---	P4	D	2600	
6063	6.3	ET-0607-1	0.0	85	P3	G	----	PLATE NO. 1. NOTE 3.
6063	6.3	ET-0107-6	0.0	85	P3	G	----	PLATE NO. 2. NOTE 3.
6064	6.3	ET-1572-6	1.0	---	P4	C	3800	
6065	6.3	ET-1572-6	0.7	---	P4	D	1400	
6066	6.3	ET-1702-0	1.5	---	P4	F	820	TRIODE SECTION.
6066	6.3	ET-1602-0	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
6066	6.3	ET-1502-0	0.0	---	P1	D	----	DIODE NO. 2. NOTE 3.
6067	12.6	EV-7608-0	3.2	---	P4	D	1950	TRIODE NO. 1.
6067	12.6	EV-2103-0	3.2	---	P4	D	1950	TRIODE NO. 2.
6118	6.3	HS-0308-1	2.3	---	P4	F	500	TRIODE SECTION CAP = G.
6118	6.3	HS-0508-3	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
6118	6.3	HS-0408-3	0.0	---	P1	D	----	DIODE NO. 2. NOTE 3.
6132	6.3	EV-2783-9	0.0	---	P4	C	6500	
6227	6.3	EV-2783-9	2.2	---	P4	C	4200	
6252	12.6	HR-2034-0	5.0	---	P4	F	1550	TETRODE NO. 1. USE HICKOK ADAPTER, SA-6, 1050-107. NOTE # 6-, 4+, & CONNECT PLATE JACK TO LEFT CAP.
6252	12.6	HR-6034-0	5.0	---	P4	E	1550	TETRODE NO. 2. USE HICKOK ADAPTER, SA-6, 1050-107. NOTE # 2-, 4+, & CONNECT PLATE JACK TO RIGHT CAP.
6267	6.3	EV-9613-8	1.5	---	P4	D	1150	
6360	12.6	EV-3872-0	8.0	---	P4	D	2100	TETRODE NO. 1. NOTE # 1-, 2+.
6360	12.6	EV-1672-0	8.0	---	P4	D	2100	TETRODE NO. 2. NOTE # 3-, 2+.
6374	6.3	EV-0003-0	0.0	88	P3	G	----	CAP = P. NOTE 3.
6375	1.1	EV-1800-0	4.5	---	P4	D	2150	NOTE 6.
6516	6.3	ET-1572-0	5.3	---	P4	D	1650	
6686	6.3	EV-2783-9	1.0	---	P4	C	4600	
6687	6.3	ET-1562-7	1.0	---	P4	D	630	GRID NO. 1. PLATE VOLTS = LOW.
6687	6.3	ET-7562-1	1.8	---	P4	D	630	GRID NO. 3. PLATE VOLTS = LOW.
6688	6.3	EV-2791-8	0.4	---	P4	C	7000	
6689	6.3	EV-2613-9	2.1	---	P4	C	4200	
6761	6.3	EV-2173-0	8.0	---	P4	C	5000	
6907	12.6	HR-2034-0	5.0	---	P4	E	1550	TETRODE NO. 1. USE HICKOK ADAPTER, SA-6, 1050-107. NOTE # 6-, 4+, & CONNECT PLATE JACK TO LEFT CAP.
6907	12.6	HR-6034-0	5.0	---	P4	E	1550	TETRODE NO. 2. USE HICKOK ADAPTER, SA-6, 1050-107. NOTE # 2-, 4+, & CONNECT PLATE JACK TO RIGHT CAP.
6922	6.3	EV-7608-0	2.6	---	P4	C	7000	TRIODE NO. 1.
6922	6.3	EV-2103-0	2.6	---	P4	C	7000	TRIODE NO. 2.
6927	6.3	ET-5207-0	1.8	---	P4	C	3340	TRIODE NO. 1.
6927	6.3	ET-6107-0	1.8	---	P4	C	3340	TRIODE NO. 2.
6939	12.6	EV-3872-0	3.5	---	P4	D	3150	TETRODE NO. 1. NOTE # 1-, 2+.
6939	12.6	EV-1672-0	3.5	---	P4	D	3150	TETRODE NO. 2. NOTE # 3-, 2+.
7062	12.6	EV-7608-1	1.8	---	P4	C	4100	TRIODE NO. 1. BIAS CUTOFF-6V.
7062	12.6	EV-2103-6	1.8	---	P4	C	4100	TRIODE NO. 2. BIAS CUTOFF - 6V.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS.	RANGE	MIN. MUT. COND.	NOTATIONS
7308	6.3	EV-7608-0	2.6	---	P4	C	7000	TRIODE NO. 1.
7308	6.3	EV-2103-0	2.6	---	P4	C	7000	TRIODE NO. 2.
7320	6.3	EV-2793-0	1.0	---	P4	C	5650	TUBES INDICATING GAS# RETEST USING EV-1793-0.
7534	6.3	HS-5048-0	15.0	---	P4	C	4000	CAP = P.
7643	6.3	EV-2637-1	1.2	---	P4	C	3000	PENTODE SECTION.
7643	6.3	EV-9108-6	4.8	---	P4	C	3000	TRIODE SECTION.
7645	12.6	EV-3872-0	3.5	---	P4	D	3150	TETRODE NO. 1. NOTE #1-, 2+.
7645	12.6	EV-1672-0	3.5	---	P4	D	3150	TETRODE NO. 2. NOTE #3-, 2+.
7693	6.3	ET-1562-7	0.8	---	P4	C	2150	
7694	6.3	ET-1562-7	0.8	---	P4	C	2400	
7699	12.6	EV-3872-0	3.5	---	P4	D	3150	TETRODE NO. 1. NOTE #1-, 2+.
7699	12.6	EV-1672-0	3.5	---	P4	D	3150	TETRODE NO. 2. NOTE #3-, 2+.
7721	6.3	EV-2791-8	1.0	---	P4	B	6300	
7737	6.3	EV-2791-8	0.4	---	P4	C	7000	
7751	6.3	HS-5348-0	25.0	---	P4	C	3800	
7788	6.3	EV-2793-8	2.6	---	P4	D	1500	
7854	12.6	HR-6034-0	5.6	---	P4	D	2400	PLATE NO. 1. USE HICKOK ADAPTER, SA-6, 1050-107. NOTE #2-, 4+, & CONNECT PLATE JACK TO RIGHT CAP.
7854	12.6	HR-2034-0	5.6	---	P4	D	2400	PLATE NO. 2. USE HICKOK ADAPTER, SA-6, 1050-107. NOTE #6-, 4+, & CONNECT PLATE JACK TO LEFT CAP.
8233	6.3	EV-8139-0	0.0	---	P4	C	5700	USE HICKOK ADAPTER SA-8, 1050-168. PLACE 1.5K OHM RESISTOR SHUNTED WITH A 100 MFD CAPACITOR ACROSS THE SELF BIAS JACKS.
8255	6.3	EV-9802-0	1.3	---	P4	C	7500	
8278	6.3	EV-3986-0	5.8	---	P4	C	7300	USE HICKOK ADAPTER SA-8, 1050-168.
8348	1.4	EV-1670-3	1.0	---	P4	D	2200	TETRODE NO. 1.
8348	1.4	EV-3870-1	1.0	---	P4	D	2200	TETRODE NO. 2.
8416	12.6	EV-7608-0	2.6	---	P4	C	7000	TRIODE NO. 1.
8416	12.6	EV-2103-0	2.6	---	P4	C	7000	TRIODE NO. 2.
8457	12.6	EV-3872-0	8.0	---	P4	D	2100	TETRODE NO. 1 NOTE #1-, 2+
8457	12.6	EV-1672-0	8.0	---	P4	D	2100	TETRODE NO. 2 NOTE #3-, 2+.
8458	12.6	EV-3872-0	8.0	---	P4	D	2100	TETRODE NO. 1. NOTE #1-, 2+.
8458	12.6	EV-1672-0	8.0	---	P4	D	2100	TETRODE NO. 2. NOTE #3-, 2+. USE AD APTER SA-4, 1050-144 OR CA-4, 1050 -135. NOTE 7. 539C.. NO ADAPTER REQ
8509	2.0	RU-6030-0	5.6	---	P4	D	2400	PLATE NO. 1. USE ADAPTER SA-6, 1050-107. NOTE #2-, 4+. CONNECT PLATE JACK CONNECTOR TO RIGHT CAP.
8509	2.0	RU-2030-0	5.6	---	P4	D	2400	PLATE NO. 2. NOTE #6-, 4+. CONNECT THE PLATE JACK CONNECTOR TO LEFT CAP.
8556	6.3	EV-1802-0	0.0	---	P4	C	6300	USE RK = 470HM. SHUNT WITH 1000 MFD CAP.
8562	6.3	EV-9802-0	1.3	---	P4	C	7500	
8595	12.6	EV-3872-0	3.5	---	P4	D	3150	TETRODE NO. 1 NOTE #1-, 2+.
8595	12.6	EV-1672-0	3.5	---	P4	D	3150	TETRODE NO. 2 NOTE #3-, 2+.
8608	6.3	EV-8039-2	1.3	---	P4	B	12600	CAP=P. USE HICKOK ADAPTER SA-8, 1050-168
8637	12.6	FZ-1672-0	8.0	---	P4	C	3100	TETRODE NO. 1. (SEE BELOW)
8637	12.6	FZ-3872-0	8.0	---	P4	C	3100	TETRODE NO. 2. (SEE BELOW)
8737	12.6	HR-6034-0	5.6	---	P4	D	2400	USE HICKOK ADAPTER SA-8, 1050-168. PLATE NO. 1. USE ADAPTER SA-6, 1050-107. NOTE #2-, 4+.
8737	12.6	HR-2034-0	5.6	---	P4	D	2400	CONNECT PLATE JACK TO RIGHT CAP. PLATE NO. 2. USE ADAPTER SA-6, 1050-107. NOTE #6-4+.
18042	20.0	EV-2613-9	1.6	---	P4	C	5650	CONNECT PLATE JACK TO LEFT CAP.
18043	6.3	EV-2613-9	2.1	---	P4	C	4200	
18045	20.0	EV-2783-9	0.4	---	P4	C	5250	
18046	20.0	EV-2783-9	0.4	---	P4	C	5250	
18048	20.0	JR-6247-3	3.2	---	P4	D	2800	

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT. COND.	NOTATIONS
A2900	12.6	EV-7608-0	1.6	---	P4	D	2500	TRIODE NO. 1.
A2900	12.6	EV-2103-0	1.6	---	P4	D	2500	TRIODE NO. 2.
AX9903	12.6	HR-6034-0	5.6	---	P4	D	2400	PLATE NO. 1. USE HICKOK ADAPTER, SA-6, 1050-107. NOTE # 2-, 4-, & CONNECT PLATE JACK TO RIGHT CAP.
AX9903	12.6	HR-2034-0	5.6	---	P4	D	2400	PLATE NO. 2. USE HICKOK ADAPTER, SA-6, 1050-107. NOTE # 6-, 4+, & CONNECT PLATE JACK TO LEFT CAP.
AX9910	12.6	HR-2034-0	5.0	---	P4	E	1550	TETRODE NO. 1. USE HICKOK ADAPTER, SA-6, 1050-107. NOTE # 6-, 4+, & CONNECT PLATE JACK TO LEFT CAP.
AX9910	12.6	HR-6034-0	5.0	---	P4	E	1550	TETRODE NO. 2. USE HICKOK ADAPTER, SA-6, 1050-107. NOTE # 2-, 4+, & CONNECT PLATE JACK TO RIGHT CAP.
AZ41	4.3	HY-0600-0	0.0	56	P3	G	----	PLATE NO. 1. (SEE BELOW) NOTE 3.
AZ41	4.3	JX-0700-0	0.0	51	P3	G	----	PLATE NO. 2. (SEE BELOW) NOTE 3.
B36	12.6	HY-4506-2	3.7	---	P4	D	1640	USE HICKOK ADAPTER SA-5, 1050-129.
B36	12.6	HY-1203-5	3.7	---	P4	D	1640	TRIODE NO. 1.
B65	6.3	HY-1203-5	0.4	---	P4	D	1640	TRIODE NO. 2.
B65	6.3	HY-4506-2	3.7	---	P4	D	1640	TRIODE NO. 1.
B109	25.0	EV-7608-9	1.6	---	P4	D	2500	TRIODE NO. 2.
B109	25.0	EV-2103-9	1.6	---	P4	D	2500	TRIODE NO. 1.
B152	12.6	EV-7608-0	1.6	---	P4	D	2500	TRIODE NO. 2.
B152	12.6	EV-2103-0	1.6	---	P4	D	2500	TRIODE NO. 1.
B309	12.6	EV-7608-0	1.6	---	P4	D	2500	TRIODE NO. 2.
B309	12.6	EV-2103-0	1.6	---	P4	D	2500	TRIODE NO. 1.
B319	7.5	EV-2301-0	3.8	---	P4	C	3750	TRIODE NO. 2.
B319	7.5	EV-6907-0	3.8	---	P4	C	3750	TRIODE NO. 1.
B329	12.6	EV-7608-0	3.2	---	P4	D	1950	TRIODE NO. 2.
B329	12.6	EV-2103-0	3.2	---	P4	D	1950	TRIODE NO. 1.
B339	12.6	EV-7608-0	1.3	---	P4	D	875	TRIODE NO. 2.
B339	12.6	EV-2103-0	1.3	---	P4	D	875	TRIODE NO. 1.
B719	6.3	EV-7608-9	1.6	---	P4	D	2500	TRIODE NO. 2.
B719	6.3	EV-2103-9	1.6	---	P4	D	2500	TRIODE NO. 1.
BPM04	6.3	ET-1562-0	2.1	---	P4	D	2600	TRIODE NO. 2.
C3G	6.3	JR-6345-2	1.0	---	P4	C	5750	
C3M	20.0	JR-6247-3	3.2	---	P4	D	2800	
CCA	6.3	EV-7608-0	2.6	---	P4	C	7000	TRIODE NO. 1.
CCA	6.3	EV-2103-0	2.6	---	P4	C	7000	TRIODE NO. 2.
D3A	6.3	EV-2791-8	1.0	---	P4	B	6300	
D63	6.3	HS-0508-0	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
D63	6.3	HS-0304-0	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
D77	6.3	ET-0701-6	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
D77	6.3	ET-0205-6	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
D152	6.3	ET-0701-6	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
D152	6.3	ET-0205-6	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
DA90	1.4	HR-0203-0	0.0	---	P1	D	----	DIODE, NOTE 3.
DAF91	1.4	BX-6540-0	1.0	---	P4	E	390	PENTODE SECTION. PLATE VOLTS = LOW NOTE 6.
DAF91	1.4	BX-0340-0	0.0	---	P1	D	----	DIODE SECTION. NOTES 3 & 6.
DAF92	1.4	BX-6230-0	1.0	---	P4	E	390	PENTODE SECTION. PLATE VOLTS=LOW. NOTE 6.
DAF92	1.4	BX-6430-0	0.0	---	P1	D	----	DIODE SECTION. NOTES 3 & 6.
DC70	1.1	EV-1800-0	4.5	---	P4	D	2150	NOTE 6.
DC90	1.4	BX-5200-0	8.4	---	--	D	700	HOLD DOWN P1 AND PRESS P4. NOTE 6.
DCC90	3.0	BX-5600-0	7.2	---	P4	E	1260	TRIODE NO. 1. NOTE 6.
DCC90	3.0	HR-3200-0	7.2	---	P4	E	1260	TRIODE NO. 2. NOTE 6.
DCF60	1.1	EX-3120-5	0.5	---	P4	F	315	PENTODE SECTION. NOTE 6.
DCF60	1.1	EX-5600-3	4.0	---	P4	F	190	TRIODE SECTION. NOTE 6.
DD6	6.3	ET-0701-6	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
DD6	6.3	ET-0205-6	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
DDR7	6.3	ET-1572-0	5.3	---	P4	D	1650	
DF33	1.4	HS-0340-0	1.1	---	P4	E	480	CAP = G. NOTE 6.
DF60	1.1	DV-4120-0	0.0	---	P4	D	690	PLATE VOLTS=LOW. NOTE 6.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT. COND.	MUTATIONS
DF61	1.4	DV-0204-1	0.0	---	P1	D	----	OK ABOVE 700 OHM 600V SCALE. MAKE NO GAS TEST. NOTES 3 & 6.
DF62	1.1	DV-4120-0	1.0	---	P4	D	1000	PLATE VOLTS = LOW. NOTE 6.
DF67	0.6	DV-4120-0	5.7	---	P4	F	65	NOTE 6.
DF91	1.4	BX-6230-0	0.0	---	P4	F	490	PLATE VOLTS = LOW. NOTE 6.
DF92	1.4	HR-6230-0	2.8	---	P4	E	650	NOTE 6.
DF96	1.4	HR-6230-0	4.4	---	P4	F	300	
DF904	1.4	BX-6230-0	1.7	---	P4	F	570	NOTE 6.
DH63	6.3	HS-0308-1	2.3	---	P4	F	500	TRIODE SECTION. CAP = G.
DH63	6.3	HS-0508-3	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
DH63	6.3	HS-0408-3	0.0	---	P1	D	----	DIODE NO. 2. NOTE 3.
DH77	6.3	ET-1702-0	1.5	---	P4	E	820	TRIODE SECTION.
DH77	6.3	ET-1602-0	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
DH77	6.3	ET-1520-0	0.0	---	P1	D	----	DIODE NO. 2. NOTE 3.
DK91	1.4	BX-6234-0	2.0	---	P4	E	380	GRID NO. 3. NOTE 6.
DK91	1.4	BX-4306-2	2.0	---	P4	E	380	PLATE VOLTS = LOW. OSC. SECTION. PLATE VOLTS = LOW. NOTE 6.
DK32	1.4	HS-5340-0	0.0	---	--	F	775	PENIODE SECTION. CAP=G. HOLD DOWN P1 AND PRESS P4. NOTE 6
DK32	1.4	HS-5634-0	5.5	---	P4	F	250	OSC. SECTION
DL33	2.5	HS-5340-0	8.3	---	P4	E	1130	NOTE 6.
DL35	1.4	HS-5340-0	10.6	---	P4	F	1000	NOTE 6.
DL36	1.4	HS-5340-0	7.5	---	P4	C	1320	NOTE 6.
DL63	6.3	HS-0308-0	2.4	---	P4	E	1260	TRIODE SECTION CAP = G.
DL63	6.3	HS-0508-0	0.0	---	P1	C	----	DIODE NO. 1. NOTE 3.
DL63	6.3	HS-0408-0	0.0	---	P1	C	----	DIODE NO. 2. NOTE 3.
DL66	1.1	DV-4120-0	0.0	---	--	D	----	NOTES 3&6. HOLD DOWN P1, PRESS P5.
DL67	1.1	DV-4120-0	4.4	---	P4	F	260	NOTE 6.
DL91	1.4	BX-3240-0	4.5	---	P4	E	950	PLATE VOLTS = LOW. NOTE 6.
DL92	2.5	HR-3240-0	5.0	---	P4	E	950	PLATE VOLTS = LOW. NOTE 6.
DL93	2.5	BX-4230-0	1.0	---	--	D	1260	HOLD DOWN P1 AND PRESS 4. NOTE 6.
DL94	3.0	HR-6230-0	6.0	---	P4	E	1260	NOTE 6.
DL95	3.0	HR-3240-0	4.0	---	P4	E	1350	NOTE 6.
DL96	2.5	BX-6230-0	4.0	---	P4	E	850	PLATE VOLTS = LOW. NOTE 6.
DL98	2.5	EV-3710-0	15.0	---	P4	E	1070	NOTE 6.
DM70	1.4	EV-1800-0	VARY	---	P5	C	----	ADJUST BIAS TO VARY BAR LENGTH. DO NOT ADJUST BELOW 4.0 VOLTS.
DM71	1.4	EV-1800-0	VARY	---	P5	C	----	ADJUST BIAS TO VARY BAR LENGTH. DO NOT ADJUST BELOW 4.0 VOLTS.
DP61	6.3	ET-1562-0	1.8	---	P4	C	3150	
DX263	2.0	BU-6030-0	5.6	---	P4	D	2400	PLATE NO. 1 USE HICKOK ADAPTER SA-6, 1050-107. NOTE #2-,4+. CONNECT PLATE JACK TO RIGHT CAP
DX263	2.0	BU-2030-0	5.6	---	P4	D	2400	PLATE NO. 2 NOTE #6-,4+. CONNECT PLATE JACK TO LEFT CAP.
DX296	12.6	FZ-1672-0	8.0	---	P4	C	3100	TETRODE NO. 1. (SEE BELOW) NOTE # 3-, 2+.
DX296	12.6	FZ-3872-0	8.0	---	P4	C	3100	TETRODE NO. 2. (SEE BELOW) NOTE # 1-, 2+. USE ADAPTER SA-8, 1050-168.
DY30	1.1	HS-0000-0	0.0	12	P5	G	----	CAP = P. NOTES 3 & 6.
DY51	1.4	CX-0000-0	0.0	27	P5	G	----	CONNECT FIL. LEADS TO OCTAL SOCKET PINS 2 & 7. NOTES 3 & 6. SINGLE LEAD = P.
DY80	1.1	BS-0000-0	0.0	12	P5	G	----	CAP = P. NOTES 3 & 6.
DY86	1.4	ES-0000-0	0.0	14	P5	G	----	CAP = P. NOTE 3.
DY87	1.4	ES-0000-0	0.0	14	P5	G	----	CAP = P. NOTE 3.
DY802	1.4	BS-0000-0	0	15	P5	G	----	CAP=P. NOTES 3 & 6.
E55L	6.3	EV-8139-0	0.0	---	P4	C	5700	USE HICKOK ADAPTER SA-8, 1050-168. PLACE 1.0 OHM RESISTOR SHUNTED WITH A 100 MFD CAPACITOR ACROSS THE SELF BIAS JACKS.
E80CC	12.6	EV-7608-0	2.3	---	P4	D	1700	TRIODE NO. 1.
E80CC	12.6	FV-2103-0	2.3	---	P4	D	1700	TRIODE NO. 2.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT. COND.	NOTATIONS
E80CF	6.3	EV-2637-1	1.2	---	P4	C	3000	PENTODE SECTION.
E80CF	6.3	FV-9108-6	4.8	---	P4	C	3000	TRIODE SECTION.
E80F	6.3	EV-9613-8	2.8	---	P4	D	1160	
E80L	6.3	EV-2783-9	2.2	---	P4	C	4200	
E81CC	12.6	FV-7608-0	1.6	---	P4	D	2500	TRIODE NO. 1.
E81CC	12.6	EV-2103-0	1.6	---	P4	D	2500	TRIODE NO. 2.
E81L	6.3	EV-2783-9	1.0	---	P4	C	4600	
E82CC	12.6	EV-7608-0	3.2	---	P4	D	1950	TRIODE NO. 1.
E82CC	12.6	EV-2103-0	3.2	---	P4	D	1950	TRIODE NO. 2.
E83CC	12.6	EV-7608-0	1.3	---	P4	D	875	TRIODE NO. 1.
E83CC	12.6	EV-2103-0	1.3	---	P4	D	875	TRIODE NO. 2.
E83F	6.3	EV-2613-9	2.1	---	P4	C	4200	
E84L	6.3	EV-2793-0	1.0	---	P4	C	5650	FOR TUBES INDICATING GAS, RETEST USING EV-1793-0.
E86C	6.3	EV-2103-0	1.2	---	P4	B	8800	
E88C	6.3	EV-9802-0	1.3	---	P4	C	7500	
E88CC	6.3	EV-7608-0	2.6	---	P4	C	7000	TRIODE NO. 1.
E88CC	6.3	EV-2103-0	2.6	---	P4	C	7000	TRIODE NO. 2.
E90CC	6.3	ET-5207-0	4.8	---	P4	D	3150	TRIODE NO. 1.
E90CC	6.3	ET-6107-0	4.8	---	P4	D	3150	TRIODE NO. 2.
E90F	6.3	ET-1562-7	0.8	---	P4	C	2150	
E91AA	6.3	ET-0701-6	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
E91AA	6.3	ET-0205-6	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
E91H	6.3	ET-1562-7	1.0	---	P4	D	630	GRID NO. 1. PLATE VOLTS = LOW.
E91H	6.3	ET-7562-1	1.8	---	P4	D	630	GRID NO. 3. PLATE VOLTS = LOW.
E91N	6.3	ET-1602-5	---	89	P5	G	----	STRIKES AT ABOUT 1.8V. NOTES 362.
E92CC	6.3	ET-6107-0	1.6	---	P4	C	3750	TRIODE NO. 1.
E92CC	6.3	ET-5207-0	1.6	---	P4	C	3750	TRIODE NO. 2.
E95F	6.3	ET-1562-0	1.8	---	P4	C	3150	
E99F	6.3	ET-1562-7	0.8	---	P4	C	2400	
E130L	6.3	HS-5048-0	15.0	---	P4	C	4000	CAP = P.
E180CC	12.6	EV-7608-1	1.8	---	P4	C	4100	TRIODE NO. 1.
E180CC	12.6	EV-2103-6	1.8	---	P4	C	4100	BIAS CUTOFF VOLTS = 6V.
E180F	6.3	EV-2791-8	0.4	---	P4	C	7000	TRIODE NO. 1.
E182CC	12.6	EV-7608-0	2.6	---	P4	C	7000	TRIODE NO. 2.
E182CC	12.6	EV-2103-0	2.6	---	P4	C	7000	
E182F	6.3	DZ-1684-0	1.7	---	P4	B	7900	
E186F	6.3	EV-2791-8	0.4	---	P4	C	7000	
E188CC	6.3	EV-7608-0	2.6	---	P4	C	7000	TRIODE NO. 1.
E188CC	6.3	EV-2103-0	2.6	---	P4	C	7000	TRIODE NO. 2.
E235L	6.3	HS-5348-0	25.0	---	P4	C	3800	
E283CC	6.3	EV-9801-7	2.4	---	P4	E	315	TRIODE NO. 1.
E283CC	6.3	EV-2306-7	2.4	---	P4	E	315	TRIODE NO. 2.
E810F	6.3	EV-2793-8	2.6	---	P4	D	1500	
E2134	6.3	ET-1592-0	3.0	---	P4	C	4250	
EA76	6.3	BU-0203-0	0.0	10	P1	G	----	NOTE 3.
EA91	6.3	ET-0701-6	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
EA91	6.3	ET-0205-6	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
EA901	6.3	ET-0701-6	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
EA901	6.3	ET-0205-6	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
EA901S	6.3	ET-0701-6	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
EA901S	6.3	ET-0205-6	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
EABC80	6.3	EV-8907-0	1.3	---	P4	E	750	TRIODE SECTION.
EABC80	6.3	EV-0607-0	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
EABC80	6.3	EV-0203-0	0.0	---	P1	F	----	DIODE NO. 2. NOTE 3.
EABC80	6.3	EV-0107-0	0.0	---	P1	E	----	DIODE NO. 3. NOTE 3.
EAF42	6.3	JR-6257-4	4.4	---	P4	E	750	PENTODE SECTION.
EAF42	6.3	JR-0307-0	0.0	---	P1	C	----	DIODE SECTION. USE HICKOK ADAPTER SA-5 CODE NO. 1050-129. NOTE 3.
EAM86	6.3	EV-8769-3	19.0	---	P4	A	----	SOLID BAR (SEE BELOW)
EAM86	6.3	EV-8769-3	6.0	---	P4	A	----	SPLIT BAR (ALSO ABOVE) PLATE VOLTS = LOW. SHORT ON POSITION 'E'.
SEE NEXT PAGE FOR CONTINUATION								

TUBE TYPE	FIL.	SELECTIONS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT. COND.	NOTATIONS
EAM86	6.3	EV-0703-0	0.0	---	P1	D	----	DIODE.
EB41	6.3	JR-0607-0	0.0	0	P1	G	----	DIODE NO. 1. (SEE BELOW) NOTE 3.
EB41	6.3	JR-0403-0	0.0	0	P1	G	----	DIODE NO. 2. (SEE BELOW) NOTE 3.
EB91	6.3	ET-0701-6	0.0	0	P1	G	----	USE HICKOK ADAPTER SA-5, 1050-129. DIODE NO. 1. NOTE 3.
EB91	6.3	ET-0205-6	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
EBC33	6.3	HS-0308-0	2.4	---	P4	F	1260	TRIODE SECTION. CAP = G.
EBC33	6.3	HS-0508-0	2.4	---	P1	C	----	DIODE NO. 1. NOTE 3.
EBC33	6.3	HS-0408-0	2.4	---	P1	C	----	DIODE NO. 2. NOTE 3.
EBC41	6.3	JR-3207-0	1.3	---	P4	F	790	TRIODE SECTION.
EBC41	6.3	JR-0607-0	0.0	---	P1	C	----	DIODE NO. 1. NOTE 3.
EBC41	6.3	JR-0507-0	0.0	---	P1	C	----	DIODE NO. 2. NOTE 3.
EBC81	6.3	EV-2103-0	1.3	---	P4	E	790	USE HICKOK ADAPTER SA-5, 1050-129. TRIODE SECTION.
EBC81	6.3	EV-0603-0	0.0	---	P1	C	----	DIODE NO. 1. NOTE 3.
EBC81	6.3	EV-0803-0	0.0	---	P1	C	----	DIODE NO. 2. NOTE 3.
EBC90	6.3	ET-1702-0	1.5	---	P4	E	820	TRIODE SECTION.
EBC90	6.3	ET-1602-0	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
EBC90	6.3	ET-1502-0	0.0	---	P1	D	----	DIODE NO. 2. NOTE 3.
EBC91	6.3	ET-1702-5	1.3	---	P4	E	800	TRIODE SECTION.
EBC91	6.3	ET-1602-5	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
EBC91	6.3	ET-1502-7	0.0	---	P1	D	----	DIODE NO. 2. NOTE 3.
EBF32	6.3	HS-0368-1	4.0	---	P4	E	720	PENTODE SECTION. CAP = G.
EBF32	6.3	HS-0568-1	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
EBF32	6.3	HS-0468-1	0.0	---	P1	D	----	DIODE NO. 2. NOTE 3.
EBF80	6.3	EV-2613-9	0.9	---	P4	E	1400	PENTODE SECTION.
EBF80	6.3	EV-2713-9	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
EBF80	6.3	EV-2813-9	0.0	---	P1	D	----	DIODE NO. 2. NOTE 3.
EBF83	6.3	EV-2163-9	0.0	---	P1	D	----	PENTODE SECTION. NOTE 3.
EBF83	6.3	EV-0803-0	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
EBF83	6.3	EV-0703-0	0.0	---	P1	D	----	DIODE NO. 2. NOTE 3.
EBF89	6.3	EV-2613-9	2.6	---	P4	C	1800	PENTODE SECTION.
EBF89	6.3	EV-0803-0	0.0	---	P1	C	----	DIODE NO. 1. NOTE 3.
EBF89	6.3	EV-0703-0	0.0	---	P1	C	----	DIODE NO. 2. NOTE 3.
EC71	6.3	DW-1805-7	0.6	---	P4	C	3450	PLATE VOLTS = LOW.
EC80	6.3	EV-1903-0	0.5	---	P4	B	7600	
EC81	6.3	EV-1803-0	5.0	---	P4	D	2500	
EC84	6.3	JX-1502-0	2.2	---	P4	C	6300	
EC86	6.3	EV-2103-0	1.2	---	P4	B	8800	
EC88	6.3	EV-9802-0	1.3	---	P4	C	7500	
EC90	6.3	ET-6107-0	4.8	---	P4	E	1380	
EC91	6.3	ET-1705-0	0.8	---	P4	C	5300	
EC92	6.3	ET-6107-0	1.6	---	P4	D	2500	
EC94	6.3	ET-2105-0	1.4	---	P4	C	4200	PLATE VOLTS = LOW.
EC95	6.3	ET-2567-0	0.8	---	P4	C	4500	
EC97	6.3	ET-2501-6	1.4	---	P4	C	7000	
EC806S	6.3	EV-2103-0	1.2	---	P4	B	8800	
EC900	6.3	ET-1502-6	1.2	---	P4	C	8000	
EC8010	6.3	EV-1802-0	0.0	---	P4	C	6300	USE RK = 47 OHM SHUNT WITH 1000MFD CAP.
ECC33	6.3	HY-4506-2	3.7	---	P4	D	1640	TRIODE NO. 1.
ECC33	6.3	HY-1203-5	3.7	---	P4	D	1640	TRIODE NO. 2.
ECC35	6.3	HY-4506-2	0.4	---	P4	D	1000	TRIODE NO. 1.
ECC35	6.3	HY-1203-5	0.4	---	P4	D	1000	TRIODE NO. 2.
ECC40	6.3	JR-6507-0	2.6	---	P4	D	1825	TRIODE NO. 1.
ECC40	6.3	JR-3204-0	2.6	---	P4	D	1825	TRIODE NO. 2. USE HICKOK ADAPTER SA-5 CODE NO. 1050-129.
ECC81	12.6	EV-7608-0	1.6	---	P4	D	2500	TRIODE NO. 1.
ECC81	12.6	EV-2103-0	1.6	---	P4	D	2500	TRIODE NO. 2.
ECC82	12.6	EV-7608-0	3.2	---	P4	D	1950	TRIODE NO. 1.
ECC82	12.6	EV-2103-0	3.2	---	P4	D	1950	TRIODE NO. 2.
ECC83	12.6	EV-7608-0	1.3	---	P4	D	875	TRIODE NO. 1.
ECC83	12.6	EV-2103-0	1.3	---	P4	D	875	TRIODE NO. 2.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT. COND.	NOTATIONS
ECC84	6.3	EV-6907-0	3.8	---	P4	C	3750	TRIODE NO. 1.
ECC84	6.3	EV-2301-0	3.8	---	P4	C	3750	TRIODE NO. 2.
ECC85	6.3	EV-7608-9	1.6	---	P4	D	2500	TRIODE NO. 1.
FCC85	6.3	EV-2103-9	1.6	---	P4	D	2500	TRIODE NO. 2.
ECC86	6.3	EV-7608-0	1.8	---	P1	E	----	TRIODE NO. 1. (SEE BELOW) NOTE 3.
ECC86	6.3	EV-2103-0	1.8	---	P1	E	----	TRIODE NO. 2. (SEE BELOW) NOTE 3.
ECC88	6.3	EV-7608-0	3.0	---	P4	C	7750	NO GAS TEST. OK ABOVE DIODES OK.
ECC88	6.3	EV-2103-0	3.0	---	P4	C	7750	TRIODE NO. 1.
ECC89	6.3	EV-6908-0	2.4	---	P4	C	6000	TRIODE NO. 2.
ECC89	6.3	EV-2301-0	2.4	---	P4	C	6000	TRIODE NO. 1.
ECC91	6.3	ET-5207-0	1.8	---	P4	C	3340	TRIODE NO. 2.
ECC91	6.3	ET-6107-0	1.8	---	P4	C	3340	TRIODE NO. 1.
ECC180	6.3	EV-7608-9	2.0	---	P4	C	4000	TRIODE NO. 2.
ECC180	6.3	EV-2103-9	2.0	---	P4	C	4000	TRIODE NO. 1.
ECC186	12.6	EV-7608-0	3.2	---	P4	D	1950	TRIODE NO. 2.
ECC186	12.6	EV-2103-0	3.2	---	P4	D	1950	TRIODE NO. 1.
ECC189	6.3	EV-7608-0	2.4	---	P4	C	7500	TRIODE NO. 2.
ECC189	6.3	EV-2103-0	2.4	---	P4	C	7500	TRIODE NO. 1.
ECC230	6.3	HY-0506-4	0.0	83	P3	G	----	TRIODE NO. 1. MAKE NO GAS TEST. NOTE 3.
FCC230	6.3	HY-0203-1	0.0	83	P3	G	----	TRIODE NO. 2. MAKE NO GAS TEST. NOTE 3.
ECC801	12.6	EV-7608-0	1.6	---	P4	D	2500	TRIODE NO. 1.
ECC801	12.6	EV-2103-0	1.6	---	P4	D	2500	TRIODE NO. 2.
ECC801S	12.6	EV-7608-0	1.6	---	P4	D	2500	TRIODE NO. 1.
ECC801S	12.6	EV-2103-0	1.6	---	P4	D	2500	TRIODE NO. 2.
ECC802	12.6	EV-7608-0	3.2	---	P4	D	1950	TRIODE NO. 1.
ECC802	12.6	EV-2103-0	3.2	---	P4	D	1950	TRIODE NO. 2.
ECC802S	12.6	EV-7608-0	3.2	---	P4	D	1950	TRIODE NO. 1.
ECC802S	12.6	EV-2103-0	3.2	---	P4	D	1950	TRIODE NO. 2.
ECC803	12.6	EV-7608-0	1.3	---	P4	D	875	TRIODE NO. 1.
ECC803	12.6	EV-2103-0	1.3	---	P4	D	875	TRIODE NO. 2.
ECC803S	12.6	EV-7608-0	1.3	---	P4	D	875	TRIODE NO. 1.
ECC803S	12.6	EV-2103-0	1.3	---	P4	D	875	TRIODE NO. 2.
ECC960	6.3	ET-5207-0	4.8	---	P4	D	3150	TRIODE NO. 1.
ECC960	6.3	ET-6107-0	4.8	---	P4	D	3150	TRIODE NO. 2.
ECC962	6.3	ET-6107-0	1.6	---	P4	C	3750	TRIODE NO. 1.
ECC962	6.3	ET-5207-0	1.6	---	P4	C	3750	TRIODE NO. 2.
ECC2000	6.3	FW-8709-1	2.8	---	P4	B	9500	TRIODE NO. 1. USE ADAPTER SA-11. MODEL 5398# USE SA-11 & CA-4.
ECC2000	6.3	FW-3W02-1	2.8	---	P4	B	9500	NOTE 7.
ECF80	6.3	EV-2637-1	1.2	---	P4	C	3000	TRIODE NO. 2.
ECF80	6.3	EV-9108-6	4.8	---	P4	C	3000	PENTODE SECTION.
ECF82	6.3	EV-2637-0	0.8	---	P4	D	2400	TRIODE SECTION.
ECF82	6.3	EV-9108-0	1.0	---	P4	C	5350	PENTODE SECT. PLATE VOLTS = LOW.
ECF83	6.3	EV-9678-0	1.0	---	P4	E	900	TRIODE SECT. PLATE VOLTS = NORMAL.
ECF83	6.3	EV-2301-0	14.0	---	P4	E	1000	PENTODE SECTION.
ECF86	6.3	EV-2893-0	0.8	---	P4	C	5000	TRIODE SECTION.
ECF86	6.3	EV-6703-0	8.0	---	P4	C	4000	PENTODE SECTION. USE ADAPTER SA-11.
ECF200	6.3	FW-3782-4	1.5	---	P4	C	4700	MODEL 5398# USE SA-11 & CA-4.
ECF200	6.3	FW-W901-0	1.2	---	P4	D	3000	NOTE 7.
ECF201	6.3	FW-3782-4	1.5	---	P4	C	4400	TRIODE SECTION.
ECF201	6.3	FW-W901-0	4.5	---	P4	C	3150	PENTODE SECTION. USE ADAPTER SA-11. MODEL 5398# USE SA-11 & CA-4.
ECF801	6.3	EV-2671-0	1.0	---	P4	C	4900	NOTE 7.
ECF801	6.3	EV-9803-0	4.2	---	P4	C	6100	TRIODE SECTION.
ECF802	6.3	EV-2637-0	1.6	---	P4	D	2400	PENTODE SECTION.
ECF802	6.3	EV-9108-0	1.1	---	P4	D	2200	TRIODE SECTION.
ECF804	6.3	EV-2637-0	1.4	---	P4	C	4700	PENTODE SECTION.
SEE NEXT PAGE FOR CONTINUATION								

TUBE TYPE	FIL.	SELECTORS	PLATE VOLTS	SCREEN	PRESS.	RANGE	WTR. MULT. CORR.	NOTATIONS
ECF804	6.3	FV-9102-0	1.4	---	P4	C	4700	TRIODE SECTION.
ECF805	6.3	FV-7328-0	1.0	---	P4	C	4600	PENTODE SECTION.
ECF805	6.3	FV-9138-0	6.0	---	P4	D	4000	TRIODE SECTION.
ECF835	6.3	HS-0348-5	1.0	---	P4	F	1000	HEXODE SECTION. CAP = G.
ECF835	6.3	HS-5502-4	1.2	---	P4	D	2000	TRIODE SECTION.
ECH42	6.3	JR-6257-4	3.3	---	P4	F	810	HEPTODE SECTION (SEE BELOW)
ECH42	6.3	JR-4307-6	4.7	---	P4	F	950	TRIODE SECTION (SEE BELOW)
ECH81	6.3	FV-2613-7	3.5	---	P4	D	950	USE HICKOK ADAPTER SA-5, 1050-129.
ECH81	6.3	FV-5403-2	1.5	---	P4	D	2300	HEPTODE SECTION.
ECF83	6.3	FV-7163-2	3.0	---	P1	F	500	TRIODE SECTION.
ECF83	6.3	FV-9803-0	0.8	---	P1	F	500	HEPTODE SECTION. MAKE NO GAS TEST.
ECH84	6.3	FV-2672-1	0.4	---	---	F	750	TRIODE SECTION. MAKE NO GAS TEST.
ECH84	6.3	FV-9803-0	0.2	---	P4	D	2025	HEPTODE SECTION. HOLD DOWN P1 AND PRESS P4.
ECH200	6.3	FV-5761-2	1.0	---	---	F	700	TRIODE SECTION. PLATE VOLTS = LOW.
ECH200	6.3	FW-8409-0	2.4	---	P4	C	3150	HEPTODE SECTION. HOLD DOWN P1 & PRESS P4. USE ADAPTER SA-11. MODEL 539B# USE SA-11 & CA-4. NOTE 7.
ECL80	6.3	EV-9683-7	4.0	---	P4	D	2100	TRIODE SECTION.
ECL80	6.3	EV-2103-0	5.0	---	P4	D	850	PENTODE SECTION.
ECL82	6.3	EV-3672-0	7.4	---	P4	D	2700	TRIODE SECTION.
ECL82	6.3	FV-1908-0	0.6	---	P4	E	1350	PENTODE SECTION.
ECL83	6.3	FV-9587-0	4.0	---	P4	D	2650	TRIODE SECTION.
ECL83	6.3	FV-2103-0	4.0	---	P4	F	200	PENTODE SECTION.
ECL84	6.3	EV-8697-0	0.6	---	P4	C	6900	TRIODE SECTION.
ECL84	6.3	EV-1203-0	1.0	---	P4	D	2800	PENTODE SECTION.
ECL85	6.3	EV-9678-0	8.0	---	P4	C	4100	TRIODE SECTION.
ECL85	6.3	EV-2103-0	2.0	---	P4	D	2800	PENTODE SECTION.
ECL86	6.3	EV-8637-0	1.0	---	P4	C	5500	TRIODE SECTION.
ECL86	6.3	FV-1902-0	0.7	---	P4	E	550	PENTODE SECTION.
ECL800	6.3	EV-2397-0	2.0	---	P4	C	3400	TRIODE SECTION.
ECL800	6.3	EV-6897-0	2.0	---	P4	C	3400	PENTODE NO. 1. NOTE 8# 6-, 7+.
ECL800	6.3	EV-2107-0	2.0	---	P4	F	80	PENTODE NO. 2. NOTE 8# 2-, 7+.
ED500	6.3	EV-0801-0	0.0	---	P1	E	----	TRIODE SECTION.
EF22	6.3	JR-6237-4	4.8	---	P4	E	1070	CAP = G. USE HICKOK ADAPTER SA-8
EF40	6.3	JR-5267-4	1.0	---	P4	E	1000	CODE NO. 1050-16P. NOTE 3.
EF41	6.3	JR-6257-0	3.0	---	P4	E	950	USE HICKOK ADAPTER SA-5, 1050-129.
EF42	6.3	JR-6257-4	0.5	---	P4	C	4600	USE HICKOK ADAPTER SA-5, 1050-129.
EF71	6.3	DW-1574-0	1.6	---	P4	D	1900	USE HICKOK ADAPTER SA-5, 1050-129.
EF80	6.3	EV-2781-9	0.5	---	P4	C	4500	USE HICKOK ADAPTER SA-5, 1050-129.
EF85	6.3	EV-2781-9	2.0	---	P4	D	2500	USE HICKOK ADAPTER SA-5, 1050-129.
EF86	6.3	EV-9613-8	1.5	---	P4	D	1150	
EF89	6.3	EV-2783-9	2.2	---	P4	D	1900	
EF91	6.3	ET-1572-6	1.0	---	P4	C	3800	
EF92	6.3	ET-1572-6	0.7	---	P4	D	1400	
EF93	6.3	ET-1567-2	1.0	---	P4	D	2070	
EF94	6.3	ET-1567-2	1.0	---	P4	C	2500	
EF95	6.3	ET-1562-0	1.8	---	P4	C	3150	
EF96	6.3	ET-1562-0	1.7	---	P4	D	2500	
EF97	6.3	ET-7652-1	0.0	---	P1	E	----	MAKE NO GAS TEST. NOTE 3.
EF98	6.3	ET-1652-7	0.0	---	P1	G	----	OK ABOVE 450 ON 3000 SCALE.
EF183	6.3	FV-2781-9	2.8	---	P4	C	3200	
EF184	6.3	EV-2781-9	1.2	---	P4	C	4900	
EF731	6.3	DW-1574-0	1.6	---	P4	D	1900	
EF732	6.3	DW-1574-0	2.0	---	P4	C	2500	
EF800	6.3	EV-2781-9	0.5	---	P4	C	4500	
EF804	6.3	EV-9783-1	1.5	---	P4	D	1260	
EF805S	6.3	EV-2781-9	2.0	---	P4	D	2500	
EF806S	6.3	EV-9613-8	1.5	---	P4	D	1150	
EF861	6.3	EV-2791-8	0.4	---	P4	C	7000	
EF905	6.3	ET-1562-0	1.8	---	P4	C	3150	
EFL200	6.3	FW-8W97-0	2.2	---	P4	C	6300	PENTODE NO. 1. USE ADAPTER SA-11. MODEL 539B# USE SA-11 & CA-4. NOTE 7.

SEE NEXT PAGE FOR CONTINUATION

TUBE TYPE	FIL.	SELECTIONS	PLATE VOLTS	SHUNT	PRESS.	RANGE	MIN. MUT. COND.	NOTATIONS
EFL200	6.3	FW-1432-0	1.0	---	P4	C	5500	PENTODE NO. 2.
EH9C	6.3	ET-1562-7	0.0	---	P4	D	500	GRID NO. 1. PLATE VOLTS = LOW.
EH90	6.3	ET-1562-1	0.0	---	P4	D	790	GRID NO. 3. PLATE VOLTS = LOW.
EH900S	6.3	ET-1562-7	1.0	---	P4	D	700	GRID NO. 1 PLATE VOLTS=LOW
EH900S	6.3	ET-1562-1	1.8	---	P4	D	440	GRID NO. 3 PLATE VOLTS=LOW
EK90	6.3	ET-1562-1	0.0	---	---	D	440	AMPL. SECTION. HOLD DOWN P1 AND PRESS P4.
EK90	6.3	ET-1602-7	2.0	---	P4	C	6500	OSC. SECTION.
EL34	6.3	HS-5348-1	5.5	---	P4	C	3800	
EL36	6.3	HS-5048-0	11.0	---	P4	C	5000	CAP = P.
EL37	6.3	HS-5348-1	3.0	---	P4	C	3800	
EL38	6.3	HS-5048-1	0.0	---	P4	B	8500	CAP = P.
EL41	6.3	JR-6257-0	1.0	---	P4	C	6300	USE HICKOK ADAPTER SA-5, 1050-129.
EL42	6.3	JR-6257-0	2.8	---	P4	D	2000	USE HICKOK ADAPTER SA-5, 1050-129.
EL80	6.3	FV-2713-0	1.0	---	P4	C	6300	
EL81	6.3	EV-2073-1	16.0	---	P4	D	2900	CAP = P.
EL83	6.3	FV-2713-6	0.5	---	P4	C	6300	
EL84	6.3	EV-2793-0	1.0	---	P4	C	5650	TUNES INDICATING GAS* RETEST USING FV-1793-0.
EL85	6.3	EV-2793-0	2.8	---	P4	D	2000	
EL86	6.3	EV-2793-0	4.0	---	P4	C	4500	
EL90	6.3	ET-1562-0	2.1	---	P4	D	2600	
EL91	6.3	ET-1572-0	5.2	---	P4	D	1650	
EL95	6.3	ET-1562-0	1.0	---	P4	D	2900	
EL180	12.6	EV-2781-3	1.0	---	P4	C	5700	
EL360	6.3	HS-5048-0	11.0	---	P4	C	5000	CAP = P.
EL500	6.3	FV-2074-0	16.0	---	P4	C	5000	CAP = P. USE HICKOK ADAPTER SA-8, CODE NO. 1050-168.
EL503	6.3	EV-3986-0	5.8	---	P4	C	7300	USE HICKOK ADAPTER SA-8, 1050-168.
EL505	6.3	FV-1039-2	27.0	---	P4	D	2600	CAP = P. USE HICKOK ADAPTER SA-8, CODE NO. 1050-168.
EL508	6.3	EV-1637-0	12.0	---	P4	D	2600	USE HICKOK ADAPTER SA-8, 1050-168.
EL509	6.3	EV-1039-2	27.0	---	P4	D	2600	CAP=P. USE ADAPTER SA-8, 1050-168
EL803	6.3	EV-2713-6	0.5	---	P4	C	6300	
EL821	6.3	EV-2783-9	0.0	---	P4	C	6500	
EL822	6.3	EV-2783-9	0.0	---	P4	C	6500	
ELL80	6.3	FV-2317-0	2.0	---	P4	D	3300	PENTODE NO. 1.
ELL80	6.3	EV-6897-0	2.0	---	P4	D	3300	PENTODE NO. 2.
EM34	6.3	HS-4508-0	VARY	---	P5	A	----	CONNECT A 1 MEGOHM RESISTOR FROM PLATE JACK TO PIN 3 OF BIG 7 PIN SOCKET & ANOTHER 1 MEG. TO PIN 6. EYE 1 CLOSURES AT BIAS OF ABOUT 5 & EYE 2 CLOSURES AT BIAS OF ABOUT 20. CONNECT A 1 MEGOHM RESISTOR FROM PLATE JACK TO OCTAL SOCKET PIN 7. VARY BIAS TO VARY BEAM ANGLE.
EM80	6.3	FV-1902-0	VARY	100	P4	G	----	CONNECT A 1 MEGOHM RESISTOR FROM PLATE JACK TO OCTAL SOCKET PIN 7. VARY BIAS TO VARY BEAM ANGLE.
FM81	6.3	FV-1902-0	VARY	100	P4	G	----	CONNECT A 1 MEGOHM RESISTOR FROM PLATE JACK TO OCTAL SOCKET PIN 7. VARY BIAS TO VARY BEAM ANGLE.
EM84	6.3	FV-1603-0	11.0	---	P4	G	----	SOLID BAR (SEE BELOW)
EM84	6.3	FV-1603-0	0.0	---	P4	G	----	SPLIT BAR (SEE BELOW)
EM87	6.3	FV-1603-0	6.0	---	P4	G	----	CONNECT JUMPER BETWEEN PINS 7 & 9 OF NOVAL SOCKET. CONNECT 470K, 1/2 W, 10% RESISTOR BETWEEN JUMPER & PIN 6 OF SAME SOCKET.
EM87	6.3	EV-1603-0	0.0	---	P4	G	----	SOLID BAR (SEE BELOW)
EM87	6.3	EV-1603-0	0.0	---	P4	G	----	SPLIT BAR (SEE BELOW)
EM87	6.3	EV-1603-0	0.0	---	P4	G	----	CONNECT JUMPER BETWEEN PINS 7 & 9 OF NOVAL SOCKET. CONNECT 100K, 1/2 W, 10% RESISTOR BETWEEN JUMPER & PIN 6 OF SAME SOCKET.
EMM801	6.3	EV-9203-1	10.0	---	P4	A	----	SOLID BAR (SEE BELOW)
EMM801	6.3	EV-9203-1	4.0	---	P4	A	----	SPLIT BAR (SEE BELOW)
EMM801	6.3	EV-9203-1	4.0	---	P4	A	----	CONNECT 390K, 1/2 W, 10% RESISTOR BETWEEN PINS 2 & 8 OF OCTAL TEST SOCKET.

SEE NEXT PAGE FOR CONTINUATION

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT. COND.	NOTATIONS
EMM801	6.3	EV-7204-1	10.0	---	P4	A	----	SOLID BAR (SEE BELOW)
EMM801	6.3	EV-7204-1	4.0	---	P4	A	----	SPLIT BAR (SEE BELOW)
EMM803	6.3	EV-3601-0	9.0	---	P4	A	----	CONNECT 390K, 1/2 W, 10% RESISTOR BETWEEN PINS 2 & 6 OF LOCIAL TEST SOCKET.
EMM803	6.3	EV-3601-0	0.0	---	P4	A	----	LARGE SOLID BAR (SEE BELOW)
EMM803	6.3	EV-2601-0	3.0	---	P4	A	----	SPLIT BAR (SEE BELOW)
EMM803	6.3	EV-2601-0	0.0	---	P4	A	----	CONNECT 470K, 1/2 W, 10% RESISTOR BETWEEN PINS 6 & 9 OF NOVAL TEST SOCKET.
EN91	6.3	ET-1602-5	---	89	P5	G	----	SMALL SOLID BAR (SEE BELOW)
EQ80	6.3	EV-7163-9	6.0	---	P4	F	630	NO BAR (SEE BELOW)
EY80	6.3	EV-0903-0	0.0	91	P3	G	----	CONNECT 1 MEGOHM, 1/2 W, 10% RESISTOR BETWEEN PINS 6 & 7 OF LOCIAL TEST SOCKET.
EY81	6.3	EV-0004-0	0.0	90	P3	G	----	STRIKES AT ABOUT 1.8 V. NOTES 3&2.
EY82	6.3	EV-0903-0	0.0	90	P3	G	----	NOTE 3.
EY84	6.3	EV-0003-0	0.0	88	P3	G	----	CAP = P. REVERSE METER. NOTE 3.
EY86	6.3	FS-0000-0	0.0	14	P5	G	----	NOTE 3.
EY87	6.3	ES-0000-0	0.0	14	P5	G	----	CAP = P. NOTE 3.
EY88	6.3	EV-0009-0	0.0	89	P3	G	----	CAP = P. REVERSE METER. NOTE 3.
EY91	6.3	ET-0102-0	0.0	85	P3	G	----	NOTE 3.
EY500	6.3	EV-0007-0	0.0	90	P3	G	----	CAP = P. REVERSE METER USE HICKOK ADAPTER SA-8, 1050-168. NOTE 3.
EZ2	6.3	HS-0508-1	0.0	85	P5	G	----	PLATE NO. 1 NOTE 3
EZ2	6.3	HS-0308-1	0.0	85	P5	G	----	PLATE NO. 2 NOTE 3
EZ35	6.3	HS-0508-1	0.0	85	P3	G	----	PLATE NO. 1. NOTE 3.
EZ35	6.3	HS-0308-1	0.0	85	P3	G	----	PLATE NO. 2. NOTE 3.
EZ40	6.3	JR-0207-0	0.0	80	P3	G	----	DIODE NO. 1. USE HICKOK ADAPTER SA-5 CODE NO. 1050-129. NOTE 3.
EZ40	6.3	JR-0607-0	0.0	80	P3	G	----	DIODE NO. 2. USE HICKOK ADAPTER SA-5 CODE NO. 1050-129. NOTE 3.
EZ80	6.3	EV-0703-1	0.0	80	P3	G	----	PLATE NO. 1. NOTE 3.
EZ80	6.3	EV-0103-7	0.0	80	P3	G	----	PLATE NO. 2. NOTE 3.
EZ81	6.3	EV-0703-0	0.0	87	P3	G	----	PLATE NO. 1. NOTE 3.
EZ91	6.3	EV-0103-0	0.0	87	P3	G	----	PLATE NO. 2. NOTE 3.
EZ90	6.3	ET-0607-1	0.0	85	P3	G	----	PLATE NO. 1. NOTE 3.
EZ90	6.3	ET-0107-6	0.0	85	P3	G	----	PLATE NO. 2. NOTE 3.
GY501	3.0	JR-0000-0	0.0	30	P5	G	----	CAP = P. USE HICKOK ADAPTER SA-8, 1050-168. NOTES 3 & 6.
GZ30	5.0	JS-0600-0	0.0	91	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
GZ30	5.0	JS-0400-0	0.0	91	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
GZ32	5.0	JS-0600-0	0.0	89	P3	G	----	PLATE NO. 1. NOTE 3.
GZ32	5.0	JS-0400-0	0.0	89	P3	G	----	PLATE NO. 2. NOTE 3.
GZ33	5.0	JS-0600-0	0.0	88	P3	G	----	PLATE NO. 1. NOTE 3.
GZ33	5.0	JS-0400-0	0.0	88	P3	G	----	PLATE NO. 2. NOTE 3.
GZ34	5.0	JS-0600-0	0.0	88	P3	G	----	PLATE NO. 1. NOTE 3.
GZ34	5.0	JS-0400-0	0.0	88	P3	G	----	PLATE NO. 2. NOTE 3.
H63	6.3	HS-0408-1	0.9	---	P4	D	950	CAP = G.
H-1112	2.0	DR-4028-0	1.0	---	--	C	4100	CAP=P. HOLD DOWN P1 & PRESS P4. USE ADAPTER SA-3, 1050-127 OR CA-4, 1050-135.
H-1208	6.3	DR-4208-0	0.8	---	P4	C	7800	PLATE VOLTS = LOW.
HAA91	12.6	ET-0701-6	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
HAA91	12.6	ET-0205-6	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
HABC80	20.0	EV-8907-0	1.3	---	P4	E	750	TRIODE SECTION.
HABC80	20.0	EV-0607-0	0.0	-	P1	D	----	DIODE NO. 1. NOTE 3.
HABC80	20.0	EV-0203-0	0.0	-	P1	-	----	DIODE NO. 2. NOTE 3.
HABC80	20.0	EV-0107-0	0.0	-	P1	-	----	DIODE NO. 3. NOTE 3.
HBC90	12.6	ET-1702-0	1.5	---	P4	F	820	TRIODE SECTION.
HBC90	12.6	ET-1602-0	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
HBC90	12.6	ET-1502-0	0.0	---	P1	D	----	DIODE NO. 2. NOTE 3.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
HBC91	12.6	ET-1702-5	1.3	---	P4	E	800	TRIODE SECTION.
HBC91	12.6	ET-1602-5	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
HBC91	12.6	ET-1502-7	0.0	---	P1	D	----	DIODE NO. 2. NOTE 3.
HCC85	20.0	EV-7608-0	1.5	---	P4	C	3600	TRIODE NO. 1.
HCC85	20.0	EV-2103-0	1.5	---	P4	C	3600	TRIODE NO. 2.
HCH81	12.6	EV-2613-7	3.5	---	P4	D	950	HEPTODE SECTION.
HCH81	12.6	EV-9803-2	1.5	---	P4	D	2300	TRIODE SECTION.
HCL82	35.0	EV-3672-0	7.4	---	P4	D	2700	PENTODE SECTION
HCL82	35.0	EV-1908-0	0.6	---	P4	E	1350	TRIODE SECTION.
HD14	1.4	HS-0300-0	0.8	---	P4	F	190	TRIODE SECTION. CAP = G. NOTE 6.
HD14	1.4	HS-0500-0	0.0	---	P1	D	----	DIODE SECTION. NOTES 3 & 6.
HD30	2.5	EV-3710-0	15.0	---	P4	E	1070	NOTE 6.
HD93	1.1	BS-0000-0	0.0	12	P5	G	----	CAP = P. NOTES 3 & 6.
HD94	6.3	HS-5048-0	12.0	---	P4	C	3500	CAP = P.
HD96	25.0	HS-5048-0	12.0	---	P4	C	3500	CAP = P.
HF61	6.3	JR-6257-0	3.0	---	P4	E	950	USE HICKOK ADAPTER SA-5, 1050-129.
HF62	6.3	JR-6257-4	0.5	---	P4	C	4600	USE HICKOK ADAPTER SA-5, 1050-129.
HF93	12.6	ET-1567-2	1.0	---	P4	D	2070	
HF94	12.6	ET-1567-2	1.0	---	P4	C	2500	
HK90	12.6	ET-7562-1	0.0	---	--	D	940	AMPL. SECTION. HOLD DOWN P1 AND PRESS P4.
HK90	12.6	ET-1602-7	2.0	---	P4	C	4500	OSC. SECTION.
HL90	20.0	ET-1562-0	2.1	---	P4	D	2600	
HL92	50.0	ET-2761-0	1.5	---	--	C	5650	HOLD DOWN P1 AND PRESS P4.
HL94	35.0	KT-2761-0	4.0	---	P4	C	4500	BEFORE PLACING TUBE IN SOCKET, COUNT COUNTERCLOCKWISE AND JUMPER A 33 OHM, 2 WATT RESISTOR BETWEEN PINS 4 & 9 OF 9 PIN MIN. SOCKET.
HMO4	6.3	ET-7562-1	0.0	---	--	D	940	AMPL. SECTION. HOLD DOWN P1 AND PRESS P4.
HMO4	6.3	ET-1602-7	2.0	---	P4	C	4500	OSC. SECTION.
HP6	6.3	ET-1572-6	1.0	---	P4	C	3800	
HY90	BLST	ET-0167-0	---	---	--	-	----	SHORT ON 1-2-3-5 AND AC RECT. SECTION.
HZ90	12.6	ET-0607-1	0.0	85	P3	G	----	PLATE NO. 1. NOTE 3.
HZ90	12.6	ET-0107-6	0.0	85	P3	G	----	PLATE NO. 2. NOTE 3.
KT61	6.3	HS-5348-0	0.0	---	P4	C	5250	
KT66	6.3	HS-5348-1	3.0	---	P4	C	3150	
KT88	6.3	HS-5348-1	1.4	---	P4	C	6250	
KTZ63	6.3	HS-0348-5	4.0	---	P4	E	770	CAP = G.
L63	6.3	HS-5308-0	3.7	---	P4	D	1640	
L77	6.3	ET-6107-0	4.8	---	P4	E	1380	
LC900	2.5	ET-1507-6	1.2	---	P4	C	8000	
LCF80	6.3	EV-2637-1	1.2	---	P4	C	3000	PENTODE SECTION.
LCF80	6.3	EV-9108-6	4.8	---	P4	C	3000	TRIODE SECTION.
LCF200	6.3	FW-3782-4	1.5	---	P4	C	4700	PENTODE SECTION. USE ADAPTER SA-11 MODEL 539B# USE SA-11 & CA-4.
LCF200	6.3	FW-W901-0	1.2	---	P4	D	3000	NOTE 7.
LCF201	6.3	FW-3782-4	1.5	---	P4	C	4400	TRIODE SECTION.
LCF201	6.3	FW-W901-0	4.5	---	P4	C	3150	PENTODE SECTION. USE ADAPTER SA-11 MODEL 539B# USE SA-11 & CA-4.
LCF201	6.3	FW-W901-0	4.5	---	P4	C	3150	NOTE 7.
LCF201	6.3	FW-W901-0	4.5	---	P4	C	3150	TRIODE SECTION.
LCF801	5.0	EV-2671-0	1.0	---	P4	C	4900	PENTODE SECTION.
LCF801	5.0	EV-9803-0	4.2	---	P4	C	6100	TRIODE SECTION.
LCF802	6.3	EV-2637-0	1.6	---	P4	D	2400	PENTODE SECTION.
LCF802	6.3	EV-9108-0	1.1	---	P4	D	2200	TRIODE SECTION.
LCH200	5.0	FW-3741-2	1.0	---	--	E	700	HEPTODE SECTION. HOLD DOWN P1 & PRESS P4. USE ADAPTER SA-11. MODEL 539B# USE SA-11 & CA-4. NOTE 7.
LCH200	5.0	FW-8W09-0	2.4	---	P4	C	3150	TRIODE SECTION.
LCL80	4.3	EV-2103-0	5.0	---	P4	D	850	TRIODE SECTION.
LCL80	4.3	EV-9683-7	4.0	---	P4	D	2100	PENTODE SECTION.
LCL82	10.0	EV-3672-0	7.4	---	P4	D	2700	PENTODE SECTION.
LCL82	10.0	EV-1908-0	0.6	---	P4	E	1350	TRIODE SECTION.

TUBE TYPE	FIL.	SFLECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
LCL84	10.0	EV-8697-0	0.6	---	P4	C	6900	PENTODE SECTION.
LCL84	10.0	EV-1203-0	1.0	---	P4	D	2800	TRIODE SECTION.
LCL85	10.0	EV-2103-0	2.0	---	P4	D	2800	TRIODE SECTION.
LCL85	10.0	EV-9678-0	8.0	---	P4	C	4100	PENTODE SECTION.
LFL200	10.0	FW-8W97-0	2.2	---	P4	C	6300	PENTODE NO. 1. USE ADAPTER SA-11. MODEL 5398# USE SA-11 & CA-4. NOTE 7.
LFL200	10.0	FW-1432-0	1.0	---	P4	C	5300	PENTODE NO. 2.
LL86	10.0	EV-2793-0	4.0	---	P4	C	4500	
LL500	20.0	EV-2078-0	16.0	---	P4	C	5000	CAP = P. USE HICKOK ADAPTER SA-8 CODE NO. 1050-168.
LL505	25.0	EV-1039-2	27.0	---	P4	D	2600	CAP = P. USE HICKOK ADAPTER SA-8 CODE NO. 1050-168.
LL521	20.0	EV-8039-2	7.0	---	P4	C	5700	CAP = P. PLATE VOLTS = LOW. USE HICKOK ADAPTER SA-8, 1050-168.
LN119	50.0	EV-3672-0	7.4	---	P4	D	2700	PENTODE SECTION.
LN119	50.0	EV-1908-0	0.6	---	P4	E	1350	TRIODE SECTION.
LN152	6.3	EV-9683-7	4.0	---	P4	D	2100	PENTODE SECTION.
LN152	6.3	EV-2103-0	5.0	---	P4	D	850	TRIODE SECTION.
LN309	12.6	EV-9687-0	4.0	---	P4	D	2650	PENTODE SECTION.
LN309	12.6	FV-2103-0	4.0	---	P4	E	200	TRIODE SECTION.
LY81	6.3	EV-0009-0	0.0	90	P3	G	----	CAP=P. NOTE 3. REVERSE METER
LY88	20.0	EV-0009-0	0.0	89	P3	G	----	CAP = P. REVERSE METER. NOTE 3.
LY500	25.0	EV-0007-0	0.0	90	P3	G	----	CAP = P. REVERSE METER. USE HICKOK ADAPTER SA-8, 1050-168. NOTE 3.
LZ314	10.0	FV-2637-1	1.2	---	P4	C	3000	PENTODE SECTION
LZ319	10.0	EV-9108-6	4.8	---	P4	C	3000	TRIODE SECTION
M8079	6.3	ET-0701-6	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
M8079	6.3	ET-0205-6	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
M8081	6.3	ET-5207-0	1.8	---	P4	C	3340	TRIODE NO. 1.
M8081	6.3	ET-6107-0	1.8	---	P4	C	3340	TRIODE NO. 2.
M8098	OFF	AP-0102-0	---	---	P4	H	85V	STARTS AT ABOUT 125V. REGULATION = 3 VOLTS FROM 1 TO 10 MA.
M8100	6.3	ET-1562-0	1.8	---	P4	C	3150	
M8136	12.6	EV-7608-0	3.2	---	P4	D	1950	TRIODE NO. 1.
M8136	12.6	FV-2103-0	3.2	---	P4	D	1950	TRIODE NO. 2.
M8137	12.6	EV-7608-0	1.3	---	P4	D	875	TRIODE NO. 1.
M8137	12.6	FV-2103-0	1.3	---	P4	D	875	TRIODE NO. 2.
M8162	12.6	EV-7608-0	1.6	---	P4	D	2500	TRIODE NO. 1.
M8162	12.6	FV-2103-0	1.6	---	P4	D	2500	TRIODE NO. 2.
M8195	6.3	EV-6913-8	1.5	---	P4	D	1150	
M8196	6.3	ET-1562-7	1.8	---	P4	D	1400	
M8212	6.3	ET-0701-6	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
M8212	6.3	ET-0205-6	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
N14	6.3	HS-5308-0	4.2	---	P4	E	1260	
N17	2.5	HR-3240-0	5.0	---	P4	E	950	PLATE VOLTS = LOW. NOTE 6.
N18	3.0	HR-3240-0	4.0	---	P4	E	1350	NOTE 6.
N19	3.0	HR-6230-0	6.0	---	P4	E	1260	NOTE 6.
N22LL	20.0	EV-7963-2	20.0	---	P4	C	4400	USE HICKOK ADAPTER SA-8, 1050-168.
N30EL	6.3	B3-5032-4	23	---	P4	C	5200	CAP=P. NOTE 7.
N77	6.3	ET-1572-0	5.3	---	P4	D	1650	
N78	6.3	ET-1572-0	1.0	---	P4	C	5000	
N119	50.0	EV-2793-0	4.0	---	P4	C	4500	
N144	6.3	ET-1572-0	5.3	---	P4	D	1650	
N151	6.3	JR-6257-0	2.8	---	P4	D	2000	
N152	20.0	EV-2083-9	13.0	---	P4	C	3800	USE HICKOK ADAPTER SA-5, 1050-129.
N153	12.6	EV-2713-6	1.0	---	P4	C	6300	CAP = P.
N154	20.0	FV-2793-0	6.0	---	P4	D	3500	DISREGARD SHORTS TEST AFTER GM TEST IS COMPLETED. ALLOW 60 SEC. FOR WARM-UP & 5 SEC. FOR GM READINGS. KEEP LINE ADJUSTED AT 80 V.
N309	12.6	EV-2713-6	1.0	---	P4	C	6300	
N329	20.0	EV-2793-0	6.0	---	P4	D	3500	DISREGARD SHORTS TEST AFTER GM TEST IS COMPLETED. ALLOW 60 SEC. FOR WARM-UP & 5 SEC. FOR GM READINGS. KEEP LINE ADJUSTED AT 80 V.

TUBE TYPE	FIL.	SELEKTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT. COND.	NOTATIONS
N359	20.0	EV-2083-9	13.0	---	P4	C	3800	CAP = P.
N369	12.6	EV-3672-0	7.2	---	P4	D	3100	PENTODE SECTION
N369	12.6	EV-1908-0	0.5	---	P4	D	1650	TRIODE SECTION
N709	6.3	EV-2743-0	1.0	---	P4	C	5650	TUBES INDICATING GAS# RETEST USING EV-1793-0.
N727	6.3	ET-1562-0	2.1	---	P4	D	2600	
OM4	6.3	HS-0308-0	2.4	---	P4	E	1260	TRIODE SECTION CAP = G.
OM4	6.3	HS-0508-0	2.4	---	P1	C	----	DIODE NO. 1. NOTE 3.
OM4	6.3	HS-0408-0	2.4	---	P1	C	----	DIODE NO. 2. NOTE 3.
PABC80	10.0	EV-8907-6	1.3	---	P4	E	750	TRIODE SECTION.
PABC80	10.0	EV-0607-1	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
PABC80	10.0	EV-0203-7	0.0	---	P1	E	----	DIODE NO. 2. NOTE 3.
PABC80	10.0	EV-0107-8	0.0	---	P1	E	----	DIODE NO. 3. NOTE 3.
PC86	4.3	EV-2103-0	1.2	---	P4	B	8800	
PC88	4.3	EV-9802-0	1.3	---	P4	E	7500	
PC95	3.0	ET-2567-0	0.8	---	P4	C	6600	
PC97	4.3	ET-2501-6	1.4	---	P4	C	7000	
PC900	4.3	ET-1507-6	1.2	---	P4	C	8000	
PCC84	7.5	EV-6907-0	3.8	---	P4	C	3750	TRIODE NO. 1.
PCC84	7.5	FV-2301-0	3.8	---	P4	C	3750	TRIODE NO. 2.
PCC85	10.0	EV-7608-9	1.6	---	P4	D	2500	TRIODE NO. 1.
PCC85	10.0	FV-2103-9	1.6	---	P4	D	2500	TRIODE NO. 2.
PCC88	7.5	EV-7608-0	3.0	---	P4	C	7750	TRIODE NO. 1.
PCC88	7.5	FV-2103-0	3.0	---	P4	C	7750	TRIODE NO. 2.
PCC89	7.5	EV-6908-0	2.4	---	P4	C	6000	TRIODE NO. 1.
PCC89	7.5	FV-2301-0	2.4	---	P4	C	6000	TRIODE NO. 2.
PCC189	7.5	EV-7608-0	2.4	---	P4	C	7500	TRIODE NO. 1.
PCC189	7.5	FV-2103-0	2.4	---	P4	C	7500	TRIODE NO. 2.
PCF80	10.0	EV-2637-1	1.2	---	P4	C	3000	PENTODE SECTION.
PCF80	10.0	EV-9108-6	4.8	---	P4	C	3000	TRIODE SECTION.
PCF82	10.0	EV-2637-0	0.8	---	P4	D	2400	PENTODE SECTION.
PCF82	10.0	EV-9108-0	1.0	---	P4	C	5350	TRIODE SECTION.
PCF86	7.5	EV-2893-0	0.8	---	P4	C	5050	PENTODE SECTION.
PCF86	7.5	EV-6703-0	8.0	---	P4	C	4000	TRIODE SECTION.
PCF200	7.5	FW-3782-4	1.5	---	P4	C	4700	PENTODE SECTION. USE ADAPTER SA-11 MODEL 539B# USE SA-11 & CA-4.
PCF200	7.5	FW-W901-0	1.2	---	P4	D	3000	NOTE 7.
PCF201	7.5	FW-3782-4	1.5	---	P4	C	4400	TRIODE SECTION.
PCF201	7.5	FW-W901-0	4.5	---	P4	C	3150	PENTODE SECTION. USE ADAPTER SA-11 MODEL 539B# USE SA-11 & CA-4.
PCF801	7.5	EV-2671-0	1.0	---	P4	C	4900	NOTE 7.
PCF801	7.5	EV-9803-0	4.2	---	P4	C	6100	TRIODE SECTION.
PCF802	10.0	EV-2637-0	1.6	---	P4	D	2400	PENTODE SECTION.
PCF802	10.0	EV-9108-0	1.1	---	P4	D	2200	TRIODE SECTION.
PCF805	7.5	EV-7328-0	1.0	---	P4	C	4600	PENTODE SECTION.
PCF805	7.5	EV-9108-0	6.0	---	P4	D	3000	TRIODE SECTION.
PCH200	10.0	FW-3741-2	1.0	---	--	E	700	HEPTODE SECTION. HOLD DOWN P1 & PRESS P4. USE ADAPTER SA-11. MODEL 539B# USE SA-11 & CA-4. NOTE 7.
PCH200	10.0	FW-8W09-0	2.4	---	P4	C	3150	TRIODE SECTION.
PCL82	12.6	EV-3672-0	7.2	---	P4	D	3100	PENTODE SECTION.
PCL82	12.6	EV-1908-0	0.5	---	P4	D	1650	TRIODE SECTION.
PCL83	12.6	EV-9687-0	4.0	---	P4	D	2650	PENTODE SECTION.
PCL83	12.6	EV-2103-0	4.0	---	P4	E	200	TRIODE SECTION.
PCL84	12.6	EV-8697-0	0.6	---	P4	C	6900	PENTODE SECTION.
PCL84	12.6	EV-1203-0	1.0	---	P4	D	2800	TRIODE SECTION.
PCL85	20.0	EV-9678-0	8.0	---	P4	C	4100	PENTODE SECTION.
PCL85	20.0	FV-2103-0	2.0	---	P4	D	2800	TRIODE SECTION.
PCL86	12.6	EV-8637-0	1.0	---	P4	C	5500	PENTODE SECTION.
PCL86	12.6	EV-1902-0	0.7	---	P4	E	550	TRIODE SECTION.
PD500	10.0	EV-0801-0	0.0	---	P1	E	----	CAP = G. USE HICKOK ADAPTER SA-8 CODE NO. 1050-168. NOTE 3.

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
PF86	4.3	EV-9613-8	1.5	---	P4	D	1150	
PFL200	20.0	FW-8W97-0	1.4	---	P4	C	6300	PENTODE NO. 1. SET POWER ADJUST AT 90V. USE ADAPTER SA-11. MODEL 539B
PFL200	20.0	FW-1432-0	0.5	---	P4	C	5300	USE SA-11 & CA-4. NOTE 7. PENTODE NO. 2. SET POWER ADJUST AT 90V.
PL21	6.3	ET-1602-5	---	89	P5	G	----	STRIKES @ ABOUT 1.8V. NOTES 3&2.
PL36	25.0	HS-5048-0	11.0	---	P4	C	5000	CAP = P.
PL81	20.0	EV-2083-9	13.0	---	P4	C	3800	CAP = P.
PL82	20.0	EV-2793-0	6.0	---	P4	D	3500	DISREGARD SHORTS TEST AFTER GM TEST IS COMPLETED. ALLOW 60 SEC. FOR WARM-UP & 5 SEC. FOR GM READINGS. KEEP LINE ADJUSTED AT 80 V.
PL83	12.6	EV-2713-6	1.0	---	P4	C	6300	
PL84	12.6	EV-2793-0	8.0	---	P4	C	6300	SET POWER ADJUST AT 114 VOLTS.
PL500	25.0	EV-2078-0	16.0	---	P4	C	5000	CAP = P. USE HICKOK ADAPTER SA-8
								CODE NO. 1050-168.
PL505	35.0	EV-1039-2	27.0	---	P4	D	2600	CAP = P. USE HICKOK ADAPTER SA-8
								CODE NO. 1050-168.
PL508	20.0	EV-1637-0	12.0	---	P4	D	2600	SET CATH. ACT. SWITCH TO TEST.
PL521	25.0	EV-8039-2	7.0	---	P4	C	5700	USE HICKOK ADAPTER SA-8, 1050-168.
								CAP = P. PLATE VOLTS = LOW. USE
PLL80	12.6	EV-2317-0	2.0	---	P4	D	3300	HICKOK ADAPTER SA-8, 1050-168.
PLL80	12.6	EV-6897-0	2.0	---	P4	D	3300	PENTODE NO. 1.
PM04	6.3	ET-1567-2	1.0	---	P4	D	2070	PENTODE NO. 2.
PM05	6.3	ET-1562-0	1.8	---	P4	C	3150	
PM07	6.3	ET-1572-6	1.0	---	P4	C	3800	
PM84	4.3	EV-1603-0	11.0	---	P4	G	----	SOLID BAR (SEE BELOW)
PM84	4.3	EV-1603-0	0.0	---	P4	G	----	SPLIT BAR (SEE BELOW)
								CONNECT JUMPER BETWEEN PINS 7 & 9
								OF NOVAL SOCKET. CONNECT 470K,
								1/2W, 10 % RESISTOR BETWEEN
								JUMPER & PIN 6 OF SAME SOCKET
								NOTE 3.
PY80	20.0	EV-0903-0	0.0	91	P3	G	----	
PY81	20.0	EV-0009-0	0.0	90	P3	G	----	CAP = P. REVERSE METER. NOTE 3.
PY82	20.0	EV-0903-0	0.0	91	P3	G	----	NOTE 3.
PY88	25.0	EV-0009-0	0.0	89	P3	G	----	CAP = P. REVERSE METER. NOTE 3.
PY500	50.0	EV-0007-0	0.0	90	P3	G	----	CAP = P. METER REVERSE USE HICKOK
								ADAPTER SA-8, 1050-168. NOTE 3.
PY800	20.0	EV-0009-0	0.0	---	P3	F	----	CAP = P. REVERSE METER. NOTE 3.
QA2403	6.3	ET-1572-6	1.0	---	P4	C	3800	
QA2406	12.6	EV-7608-0	1.6	---	P4	D	2500	TRIODE NO. 1.
QA2406	12.6	EV-2103-0	1.6	---	P4	D	2500	TRIODE NO. 2.
QE03/10	6.3	EV-9167-3	0.0	---	P4	C	4400	
QE05/40	6.3	HS-5031-8	10.5	---	P4	C	4400	CAP = P.
QE05/40F	12.6	HS-5031-8	10.5	---	P4	C	4400	CAP = P.
QE05/40H	25.0	HS-5031-8	10.5	---	P4	C	4400	CAP = P.
QE06/50	6.3	FR-3024-0	6.0	---	P4	D	2400	CAP = P.
QQE02/5	12.6	EV-3872-0	3.5	---	P4	D	3150	TETRODE NO. 1. NOTE 8# 1-, 2+.
QQE02/5	12.6	EV-1672-0	3.5	---	P4	D	3150	TETRODE NO. 2. NOTE 8# 3-, 2+.
QQE03/12	12.6	EV-3872-0	8.0	---	P4	D	2100	TETRODE NO. 1. NOTE 8# 1-, 2+.
QQE03/12	12.6	EV-1672-0	8.0	---	P4	D	2100	TETRODE NO. 2. NOTE 8# 3-, 2+.
QQE03/20	12.6	HR-2034-0	5.0	---	P4	E	1550	TETRODE NO. 1. USE HICKOK ADAPTER,
								SA-6, 1050-107. NOTE 8# 6-, 4+, &
								CONNECT PLATE JACK TO LEFT CAP.
QQE03/20	12.6	HR-6035-0	5.0	---	P4	E	1550	TETRODE NO. 2. USE HICKOK ADAPTER,
								SA-6, 1050-107. NOTE 8# 2-, 4+, &
								CONNECT PLATE JACK TO RIGHT CAP.
QQE06/40	12.6	HR-2034-0	5.6	---	P4	D	2400	PLATE NO. 1. USE HICKOK ADAPTER,
								SA-6, 1050-107. NOTE 8# 6-, 4+, &
								CONNECT PLATE JACK TO LEFT CAP.
QQE06/40	12.6	HR-6034-0	5.6	---	P4	D	2400	PLATE NO. 2. USE HICKOK ADAPTER,
								SA-6, 1050-107. NOTE 8# 2-, 4+, &
								CONNECT PLATE JACK TO RIGHT CAP.
QQV02/6	12.6	EV-3872-0	3.5	---	P4	D	3150	TETRODE NO. 1. NOTE 8# 1-, 2+.
								SEE NEXT PAGE FOR CONTINUATION

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
QQV02/6	12.6	EV-1672-0	3.5	---	P4	D	3150	TETRODE NO. 2. NOTE 8# 3-, 2+.
QQV03/10	12.6	EV-3872-0	8.0	---	P4	D	2100	TETRODE NO. 1. NOTE 8# 1-, 2+.
QQV03/10	12.6	EV-1672-0	8.0	---	P4	D	2100	TETRODE NO. 2. NOTE 8# 3-, 2+.
QQV03/20A	12.6	HR-2034-0	5.0	---	P4	E	1550	TETRODE NO. 1. USE HICKOK ADAPTER, SA-6, 1050-107. NOTE 8# 6-, 4+, & CONNECT PLATE JACK TO LEFT CAP.
QQV03/20A	12.6	HR-6034-0	5.0	---	P4	E	1550	TETRODE NO. 2. USE HICKOK ADAPTER, SA-6, 1050-107. NOTE 8# 2-, 4+, & CONNECT PLATE JACK TO RIGHT CAP.
QQV06/40	12.6	HR-6034-0	5.6	---	P4	D	2400	PLATE NO. 1. USE HICKOK ADAPTER, SA-6, 1050-107. NOTE 8# 2-, 4+, & CONNECT PLATE JACK TO RIGHT CAP.
QQV06/40	12.6	HR-2034-0	5.6	---	P4	D	2400	PLATE NO. 2. USE HICKOK ADAPTER, SA-6, 1050-107. NOTE 8# 6-, 4+, & CONNECT PLATE JACK TO LEFT CAP.
QS95/10	OFF	AP-0501-0	---	---	P4	H	95V	REGULATION = 5 VOLTS, 2 TO 10 MA. CONNECT A 470K RESISTOR BETWEEN PINS 1 & 4 OF ANY TEST SOCKET. STARTS AT ABOUT 110 VOLTS.
QV05/25	6.3	FR-3024-0	6.0	---	P4	D	2400	CAP = P.
STV85/10	OFF	AP-0102-0	---	---	P4	H	85V	STARTS AT ABOUT 125V.
STV108/30	OFF	AP-0502-0	---	---	P4	H	108V	REGULATION = 3V FROM 1 TO 10 MA. STARTS AT ABOUT 115V.
STV150/30	OFF	AP-0502-0	---	---	P4	H	150V	REGULATION = 2V FROM 5 TO 30 MA. STARTS AT ABOUT 155V.
U26	6.3	ES-0000-0	0.0	14	P5	G	----	REGULATION = 2V FROM 5 TO 30 MA. CAP = P. NOTE 3.
U49	6.3	ES-0000-0	0.0	14	P5	G	----	CAP = P. NOTE 3.
U50	5.0	JS-0600-0	0.0	80	P3	G	----	PLATE NO. 1 NOTES 3 & 6
U50	5.0	JS-0400-0	0.0	75	P3	G	----	PLATE NO. 2 NOTES 3 & 6
U52	5.0	JS-0600-0	0.0	87	P3	G	----	PLATE NO. 1. NOTES 3 & 6.
U52	5.0	JS-0400-0	0.0	84	P3	G	----	PLATE NO. 2. NOTES 3 & 6.
U70	6.3	HS-0508-1	0.0	85	P3	G	----	PLATE NO. 1. NOTE 3.
U70	6.3	HS-0308-1	0.0	85	P3	G	----	PLATE NO. 2. NOTE 3.
U78	6.3	ET-0607-1	0.0	85	P3	G	----	PLATE NO. 1. NOTE 3.
U78	6.3	ET-0107-6	0.0	85	P3	G	----	PLATE NO. 2. NOTE 3.
U119	35.0	EV-0903-0	0.0	88	P3	G	----	NOTE 3.
U152	20.0	EV-0903-0	0.0	91	P3	G	----	NOTE 3.
U153	20.0	EV-0009-0	0.0	90	P3	G	----	CAP = P REVERSE METER. NOTE 3.
U154	20.0	EV-0903-0	0.0	91	P3	G	----	NOTE 3.
U192	20.0	EV-0903-0	0.0	91	P3	G	----	NOTE 3.
U309	20.0	EV-0903-0	0.0	91	P3	G	----	NOTE 3
U381	35.0	EV-0903-0	0.0	88	P3	G	----	NOTE 3.
U709	6.3	EV-0703-0	0.0	87	P3	G	----	PLATE NO. 1. NOTE 3.
U709	6.3	EV-0103-0	0.0	87	P3	G	----	PLATE NO. 2. NOTE 3.
UAA91	20.0	ET-0701-6	0.0	0	P1	G	----	DIODE NO. 1. NOTE 3.
UAA91	20.0	ET-0205-6	0.0	0	P1	G	----	DIODE NO. 2. NOTE 3.
UABC80	25.0	EV-8907-0	1.3	---	P4	E	750	TRIODE SECTION.
UABC80	25.0	EV-0607-0	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
UABC80	25.0	EV-0203-0	0.0	---	P1	E	----	DIODE NO. 2. NOTE 3.
UABC80	25.0	EV-0107-0	0.0	---	P1	E	----	DIODE NO. 3. NOTE 3.
UAF42	12.6	JR-6257-4	4.4	---	P4	E	750	PENTODE SECTION.
UAF42	12.6	JR-0307-0	0.0	---	P1	C	----	DIODE SECTION. USE HICKOK ADAPTER SA-5 CODE NO. 1050-129. NOTE 3.
UB41	20.0	JR-0607-0	0.0	0	P1	G	----	DIODE NO. 1 NOTE 3
UB41	20.0	JR-0403-0	0.0	0	P1	G	----	DIODE NO. 2 NOTE 3. (SEE BELOW)
UBC41	12.6	JR-3207-0	1.3	---	P4	E	790	USE HICKOK ADAPTER SA-5, 1050-129
UBC41	12.6	JR-0607-0	0.0	---	P1	C	----	TRIODE SECTION.
UBC41	12.6	JR-0507-0	0.0	---	P1	C	----	DIODE NO. 1. NOTE 3.
UBC81	12.6	EV-2103-0	1.3	---	P4	E	790	DIODE NO. 2. USE HICKOK ADAPTER SA-5 CODE NO. 1050-129. NOTE 3.
UBC81	12.6	EV-0603-0	0.0	---	P1	C	----	TRIODE SECTION.
UBC81	12.6	EV-0803-0	0.0	---	P1	C	----	DIODE NO. 1. NOTE 3.
UBF80	20.0	EV-2613-9	0.9	---	P4	E	1400	DIODE NO. 2. NOTE 3.
								PENTODE SECTION.
								SEE NEXT PAGE FOR CONTINUATION

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
UBF80	20.0	EV-0703-0	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
UBF80	20.0	EV-0803-0	0.0	---	P1	D	----	DIODE NO. 2. NOTE 3.
UBF89	20.0	EV-2613-9	2.6	---	P4	D	1800	PENTODE SECTION.
UBF89	20.0	EV-0803-0	0.0	---	P1	C	----	DIODE NO. 1. NOTE 3.
UBF89	20.0	EV-0705-0	0.0	---	P1	C	----	DIODE NO. 2. NOTE 3.
UC92	10.0	ET-6107-0	1.6	---	P4	D	2500	
UCC85	25.0	EV-7608-9	1.6	---	P4	D	2500	TRIODE NO. 1.
UCC85	25.0	EV-2103-9	1.6	---	P4	D	2500	TRIODE NO. 2.
UCH42	12.6	JR-6257-4	3.3	---	P4	E	950	HEXODE SECTION.
UCH42	12.6	JR-4307-6	4.7	---	P4	E	950	TRIODE SECTION.
								USE HICKOK ADAPTER SA-5, 1050-129.
UCH81	20.0	EV-2613-7	3.5	---	P4	D	950	HEPTODE SECTION.
UCH81	20.0	EV-9803-2	1.5	---	P4	D	2300	TRIODE SECTION.
UCL82	50.0	EV-3672-0	7.4	---	P4	D	2700	PENTODE SECTION.
UCL82	50.0	EV-1908-0	0.6	---	P4	E	1350	TRIODE SECTION.
UCL83	35.0	EV-9687-0	4.0	---	P4	D	2650	PENTODE NO. 1.
UCL83	35.0	EV-2103-0	4.0	---	P4	E	200	PENTODE NO. 2.
UF41	12.6	JR-6257-0	3.0	---	P4	E	950	USE HICKOK ADAPTER SA-5, 1050-129.
UF42	20.0	JR-6257-4	0.5	---	P4	C	4600	USE HICKOK ADAPTER SA-5, 1050-129.
UF80	20.0	EV-2781-9	0.5	---	P4	C	4500	
UF85	20.0	EV-2781-9	2.0	---	P4	D	2500	
UF86	12.6	EV-9613-8	1.5	---	P4	D	1150	
UF89	12.6	EV-2783-9	2.2	---	P4	D	1900	
UL41	50.0	JR-6257-0	1.0	---	P4	C	6300	USE HICKOK ADAPTER SA-5, 1050-129.
UL84	50.0	EV-2793-0	4.0	---	P4	C	4500	
UM80	20.0	EV-1902-0	VARY	100	P4	G	----	CONNECT A 1 MEGOHM RESISTOR FROM PLATE JACK TO OCTAL SOCKET PIN 7. VARY BIAS TO VARY BEAM.
UY41	35.0	BY-0207-0	0.0	82	P3	G	----	SET POWER ADJUST @ 85. USE HICKOK ADAPTER SA-5, 1050-129. NOTE 3.
UY42	35.0	BY-0207-0	0.0	82	P3	G	----	SET POWER ADJUST @ 85. USE HICKOK ADAPTER SA-5, 1050-129. NOTE 3.
UY85	35.0	EV-0903-0	0.0	88	P3	G	----	NOTE 3.
UY89	35.0	EV-0903-0	0.0	82	P3	G	----	SET POWER ADJUST AT 85V. NOTE 3.
W17	1.4	8X-6230-0	0.0	---	P4	E	490	PLATE VOLTS = LOW. NOTE 6.
W77	6.3	ET-1572-6	0.7	---	P4	D	1400	
WD119	20.0	EV-2613-9	2.6	---	P4	D	1800	PENTODE SECTION
WD119	20.0	EV-0803-0	0.0	---	P1	C	----	DIODE NO. 1 NOTE 3
WD119	20.0	EV-0705-0	0.0	---	P1	C	----	DIODE NO. 2 NOTE 3
X17	1.4	8X-4306-2	2.0	---	P4	E	880	PLATE VOLTS = LOW. NOTE 6.
X78	6.3	ET-2510-7	7.2	---	P4	E	485	HEXODE SECTION.
X78	6.3	ET-7600-0	1.8	---	P4	A	15000	TRIODE SECTION.
X108	20.0	ET-2510-7	7.2	---	P4	E	485	HEXODE SECTION.
X108	20.0	ET-7600-0	1.8	---	P4	A	15000	TRIODE SECTION.
X119	20.0	EV-2613-7	3.5	---	P4	D	950	HEPTODE SECTION.
X119	20.0	EV-9803-2	1.5	---	P4	D	2300	TRIODE SECTION.
X142	12.6	JR-6257-4	3.3	---	P4	E	800	HEXODE SECT. USE HICKOK ADAPTER SA-5, CODE NO. 1050-129.
X142	12.6	JR-4307-6	4.7	---	P4	F	900	TRIODE SECTION.
X719	6.3	EV-2613-7	3.5	---	P4	D	950	HEPTODE SECTION.
X719	6.3	EV-9803-2	1.5	---	P4	D	2300	TRIODE SECTION.
X727	6.3	ET-7562-1	0.0	---	--	D	940	AMPL. SECTION. HOLD DOWN P1 AND PRESS P4.
X727	6.3	ET-1602-7	2.0	---	P4	C	4500	OSC. SECTION.
XC95	2.0	ET-2567-0	0.8	---	P4	C	6600	
XC97	2.5	ET-2501-6	1.4	---	P4	C	7000	
XC900	2.0	ET-1502-6	1.2	---	P4	C	8000	
XCC82	6.3	EV-7608-0	3.2	---	P4	D	1950	TRIODE NO. 1.
XCC82	6.3	EV-2103-0	3.2	---	P4	D	1950	TRIODE NO. 2.
XCC189	4.3	EV-7608-0	2.4	---	P4	C	7500	TRIODE NO. 1.
XCC189	4.3	EV-2103-0	2.4	---	P4	C	7500	TRIODE NO. 2.
XCF80	4.3	EV-2637-1	1.2	---	P4	C	3000	PENTODE SECTION.
XCF80	4.3	EV-9108-6	4.8	---	P4	C	3000	TRIODE SECTION.
XCF86	5.0	EV-2893-0	0.6	---	P4	C	5400	PENTODE SECTION.
								SEE NEXT PAGE FOR CONTINUATION

TUBE TYPE	FIL.	SELECTORS	BIAS VOLTS	SHUNT	PRESS	RANGE	MIN. MUT.COND.	NOTATIONS
XCF86	5.0	EV-6703-0	5.4	---	P4	D	3000	TRIODE SECTION.
XCF801	6.3	EV-2671-0	1.0	---	P4	C	4900	PENTODE SECTION.
XCF801	6.3	EV-9803-0	4.2	---	P4	C	6100	TRIODE SECTION.
XCH81	3.0	EV-2613-7	3.5	---	P4	D	950	HEPTODE SECTION.
XCH81	3.0	EV-9803-2	1.5	---	P4	D	2300	TRIODE SECTION.
XCL82	7.5	EV-3672-0	7.4	---	P4	D	2700	PENTODE SECTION.
XCL82	7.5	EV-1908-0	0.6	---	P4	E	1350	TRIODE SECTION.
XCL84	7.5	EV-8697-0	0.6	---	P4	C	6900	PENTODE SECTION.
XCL84	7.5	EV-1203-0	1.0	---	P4	D	2800	TRIODE SECTION.
XCL85	10.0	EV-9678-0	8.0	---	P4	C	4100	PENTODE SECTION.
XCL85	10.0	EV-2103-0	2.0	---	P4	D	2800	TRIODE SECTION.
XF80	3.0	EV-2781-9	0.5	---	P4	C	4500	
XF85	3.0	EV-2781-9	2.0	---	P4	D	2500	
XF86	2.5	EV-9613-0	1.5	---	P4	D	1150	
XF183	3.0	EV-2781-9	2.8	---	P4	C	3200	
XF184	3.0	EV-2781-9	1.2	---	P4	C	4900	
XL36	12.6	HS-5048-0	11.0	---	P4	C	5000	CAP = P.
XL84	7.5	EV-2793-0	1.0	---	P4	C	5650	TUBES INDICATING GAS# RETEST USING EV-1793-0.
XL86	7.5	EV-2793-0	4.0	---	P4	C	4500	
XL500	12.6	EV-2078-0	16.0	---	P4	C	5000	CAP = P. USE HICKOK ADAPTER SA-8 CODE NO. 1050-168.
XY88	20.0	EV-0009-0	0.0	89	P3	G	----	CAP = P. REVERSE METER. NOTE 3.
YC95	3.0	ET-2567-0	0.8	---	P4	C	6600	
YC97	3.0	ET-2501-6	1.4	---	P4	C	7000	
YCC189	5.0	EV-7608-0	2.4	---	P4	C	7500	TRIODE NO. 1.
YCC189	5.0	EV-2103-0	2.4	---	P4	C	7500	TRIODE NO. 2.
YF183	4.3	EV-2781-9	2.4	---	P4	C	3200	
YF184	4.3	EV-2781-9	1.2	---	P4	C	4900	
YL84	10.0	EV-2793-0	1.0	---	P4	C	5650	TUBES INDICATING GAS#RE-TEST USING EV-1793-0
YL1080	1.4	EV-1670-3	1.0	---	P4	D	2200	TETRUDE NO. 1.
YL1080	1.4	EV-3870-1	1.0	---	P4	D	2200	TETRUDE NO. 2.
YL1370	6.3	HS-5031-8	10.5	---	P4	C	4400	CAP=P.
YL1371	12.6	HS-5031-8	10.5	---	P4	C	4400	CAP=P.
YL1372	25.0	HS-5031-8	10.5	---	P4	C	4400	CAP=P.
Z63	6.3	HS-0348-5	4.0	---	P4	E	770	CAP = G.
Z77	6.3	ET-1572-6	1.0	---	P4	C	3800	
Z142	20.0	JR-6257-4	0.5	---	P4	C	4600	USE HICKOK ADAPTER SA-5, 1050-129
Z150	6.3	JR-6257-4	0.5	---	P4	C	4600	USE HICKOK ADAPTER SA-5, 1050-129.
Z152	6.3	EV-2781-9	0.5	---	P4	C	4500	
Z719	6.3	EV-2781-9	0.5	---	P4	C	4500	
Z729	6.3	EV-9613-8	1.5	---	P4	D	1150	
ZD17	1.4	BX-6540-0	1.0	---	P4	E	390	PENTODE SECTION PLATE VOLTS = LOW. NOTE 6.
ZD17	1.4	BX-0340-0	0.0	---	P1	D		DIODE SECTION. NOTES 3 & 6.
ZD152	6.3	EV-2613-9	0.9	---	P4	E	1400	PENTODE SECTION.
ZD152	6.3	EV-2713-9	0.0	---	P1	D	----	DIODE NO. 1. NOTE 3.
ZD152	6.3	EV-2813-9	0.0	---	P1	D	----	DIODE NO. 2. NOTE 3.

ADAPTERS

for

TUBE TESTERS

As new tube types with new basing arrangements are developed, Hickok makes Adapters to accommodate them. These Adapters consist of the new bases which plug into a socket on your Tube Tester and thus enlarge its scope to the extent of the new basings. This Hickok policy greatly extends the useful life of your Tester. Consult the following list of Adapters with

their descriptions to determine which Adapter meets your requirements. Please order by both Model and Code number of the Adapter, as well as indicating the Model and Serial number of the Tube Tester with which the Adapter is to be used.

Model No.	Code No.	
CA-5	1050-164	Adapter - Latest Tube Bases: This adapter provides tube test sockets for Compactrons, Novars, 5 and 7-pin Nuvisitors and the new 10-pin tubes, including Decals. Three selector switches provide selection of tube elements on the latest based tubes and a permanently attached lead provides for top cap tube connections. The adapter is supplied with a connecting cable terminating in a Noval plug which is plugged into the tube tester Noval test socket.
SA-1	1050-94	Subminiature Adapter, with sockets for testing 7-pin inline and 8-pin round tube types on some early units of Models 539B, 539C, 580, 750, 752, 752A, 6000, 6000A and 6005 Tube Testers that were not supplied with these sockets on their panels, although most of the above Testers are equipped with these sockets. Check your particular Tester before ordering.
SA-2	1050-99	Subminiature Adapter, with sockets for testing 7-pin inline and 8-pin round tube types on some early units of Models 533A, 600A, 800, 800A and 1575 Tube Testers that were not supplied with these sockets on their panels, although most of the above Testers are equipped with these sockets. Check your particular Tester before ordering.
SA-3	1050-127	Nuvisor Adapter, for testing 5-pin Nuvisor tube types on all Hickok Tube Testers not supplied with this socket on the panel. NOTE: This socket is also on the CA-4, 1050-135 (and CA-5, 1050-164) Universal Adapters. If you have a Universal Adapter, this Nuvisor Adapter is unnecessary.
SA-4	1050-144	Novar Adapter, for testing all Novar tube types on all Hickok Tube Testers not supplied with this socket on the panel. NOTE: This socket is also on the CA-4, 1050-135 (and CA-5, 1050-164) Universal Adapters. If you have a Universal Adapter, this Novar Adapter is unnecessary.
SA-5	1050-129	Rimlock Adapter, for testing Foreign Rimlock tube types on all Hickok Tube Testers.
SA-6	1050-107	Septar Adapter, for testing Septar tube types such as 829B, 832A, etc., on all Hickok Tube Testers.
SA-7	1050-9	Acorn Adapter, for testing Acorn tube types on all Hickok Tube Testers not supplied with this socket on the panel.
SA-8	1050-168	Magnoval Adapter, for testing Magnoval tube types on all Hickok Tube Testers not supplied with this socket. CAUTION: Any attempt to force a Magnoval tube type into a Novar socket (it can be done) will spread the pin contacts in the socket and render it permanently useless for testing Novar tube types.
SA-9	1050-121	Pencil Tube Adapter, for testing Pencil tube types on all Hickok Tube Testers.
SA-11	1050-177	Decal Adapter, for testing 10-pin Decal tube types on all Hickok Tube Testers not supplied with this socket on panel. The following list of early Hickok Tube Testers also require a CA-4, 1050-135, Universal Adapter be used in conjunction with this Adapter: Models 533A, 539B, 600A, 605A, 750, 752, 800, 1575, 6000 and 6005.

**This Document Provided Free
At**

www.StevenJohnson.com

NOT FOR RESALE