



L1 3/4" DIA. 13 T #20 ENAM 20 T.P.I.  
 L2 3/4" DIA. 24 T #20 ENAM CLOSE WOUND  
 L3 3/4" DIA. 40 T #24 ENAM CLOSE WOUND  
 S1, S2, S3 WAFERS ON SAME SHAFT  
 S4, S5, S6 6 POS. ON SAME SHAFT

TYPE J5TR-1  
 TRANSMITTER

Cable  
 2/4/42

T-2


SST-1A

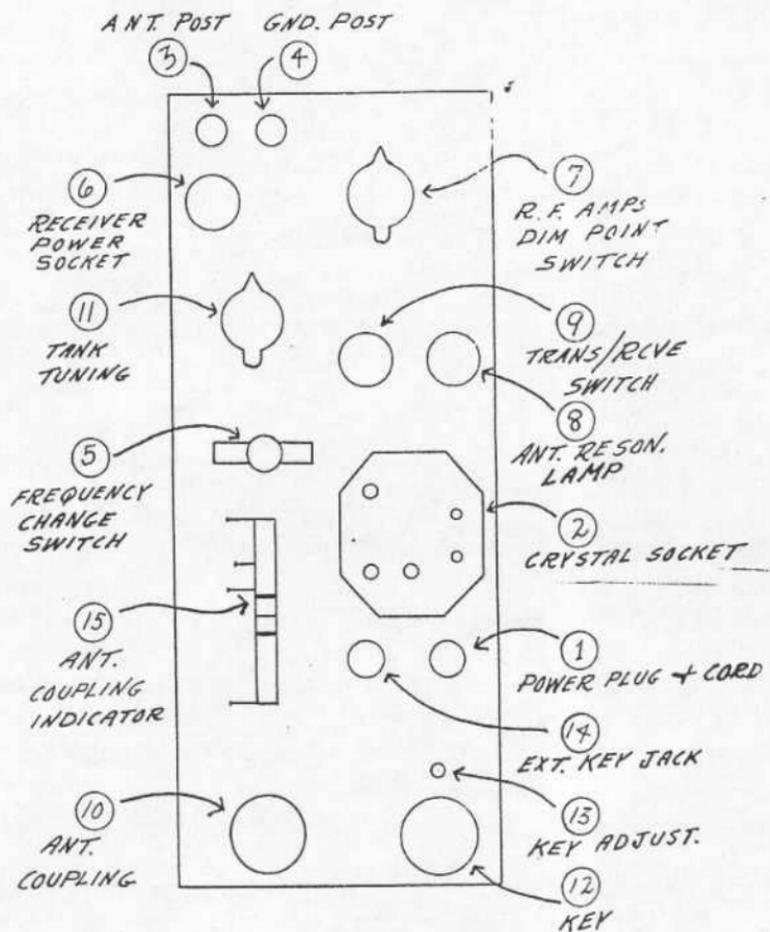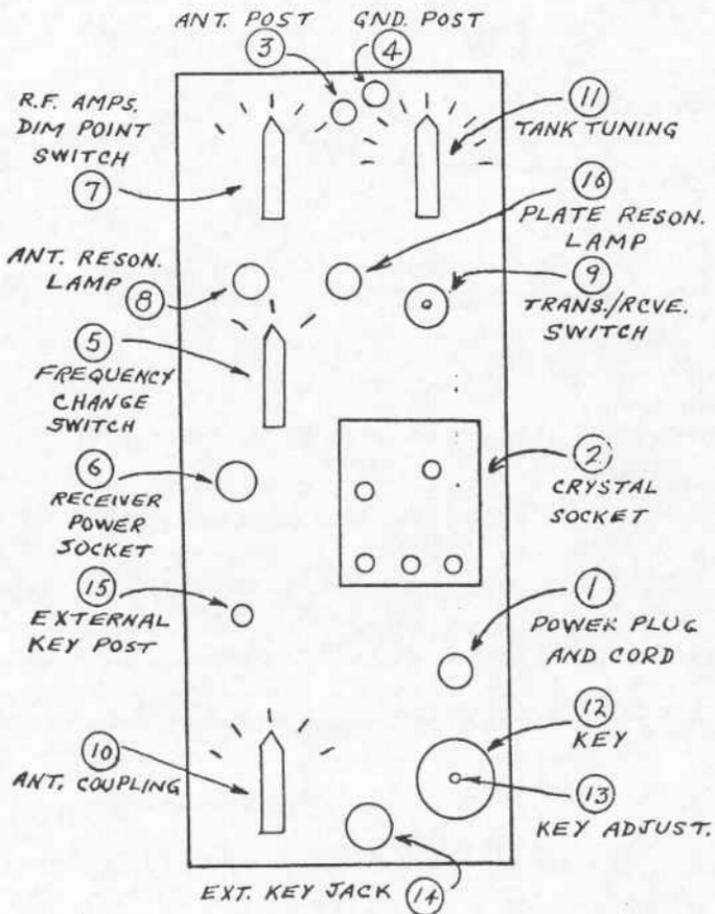


1. 110/230 V. power cord.
2. 6 V. power cord.
3. Toggle selector switch
4. Rotary " "
5. Charge-operate. "
6. Power socket.
7. 2 A fuse.
8. 20 A fuse.
9. 0-250 V AC meter.

1. 6 v. power cord.
2. Power socket.
3. 15 A. fuse holder.


1. 110/220 v. power cord.
2. Power socket.
3. 110/220 v. switch.
4. ON/OFF switch.
5. 2 A. or 3 A. fuse holder
6. 7Z4 rectifier tube.

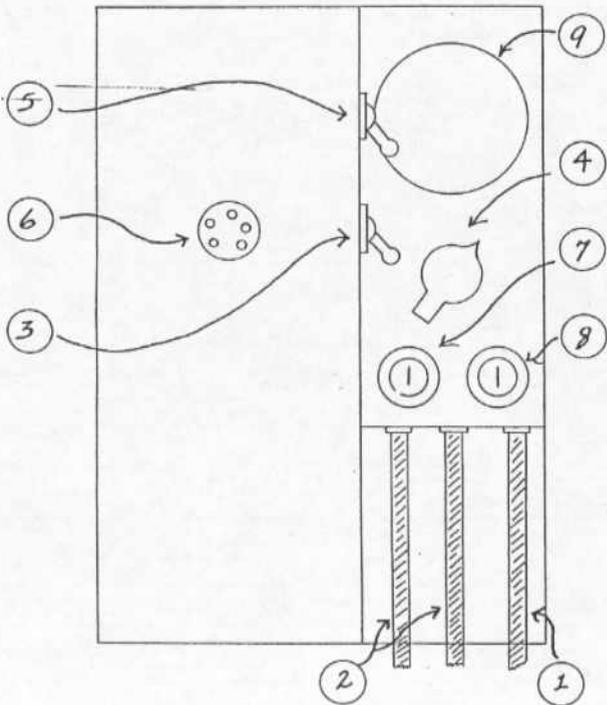

SSP-1

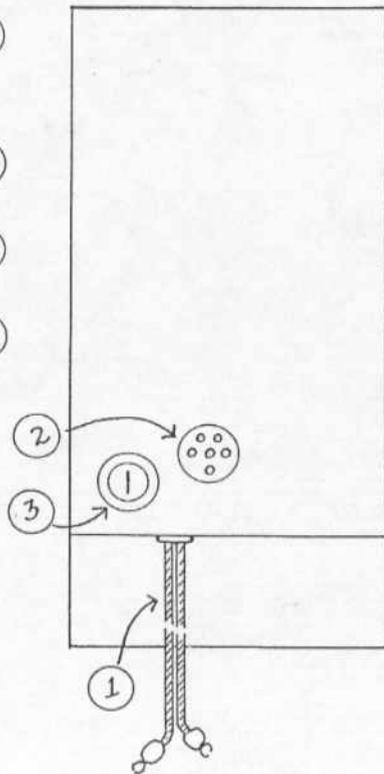


SSP - 2

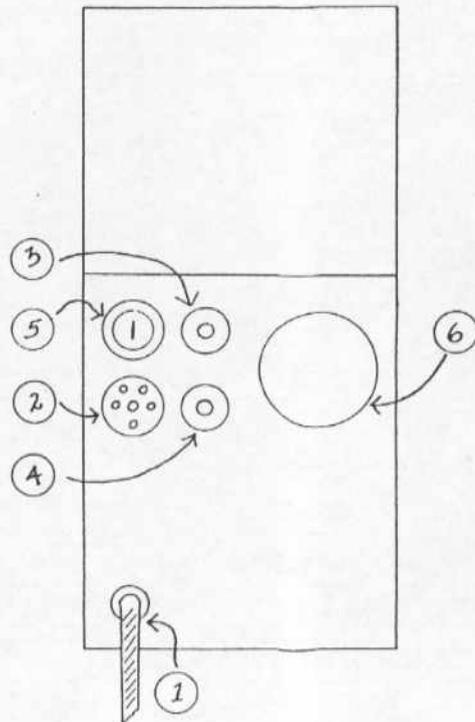

SSP - 4



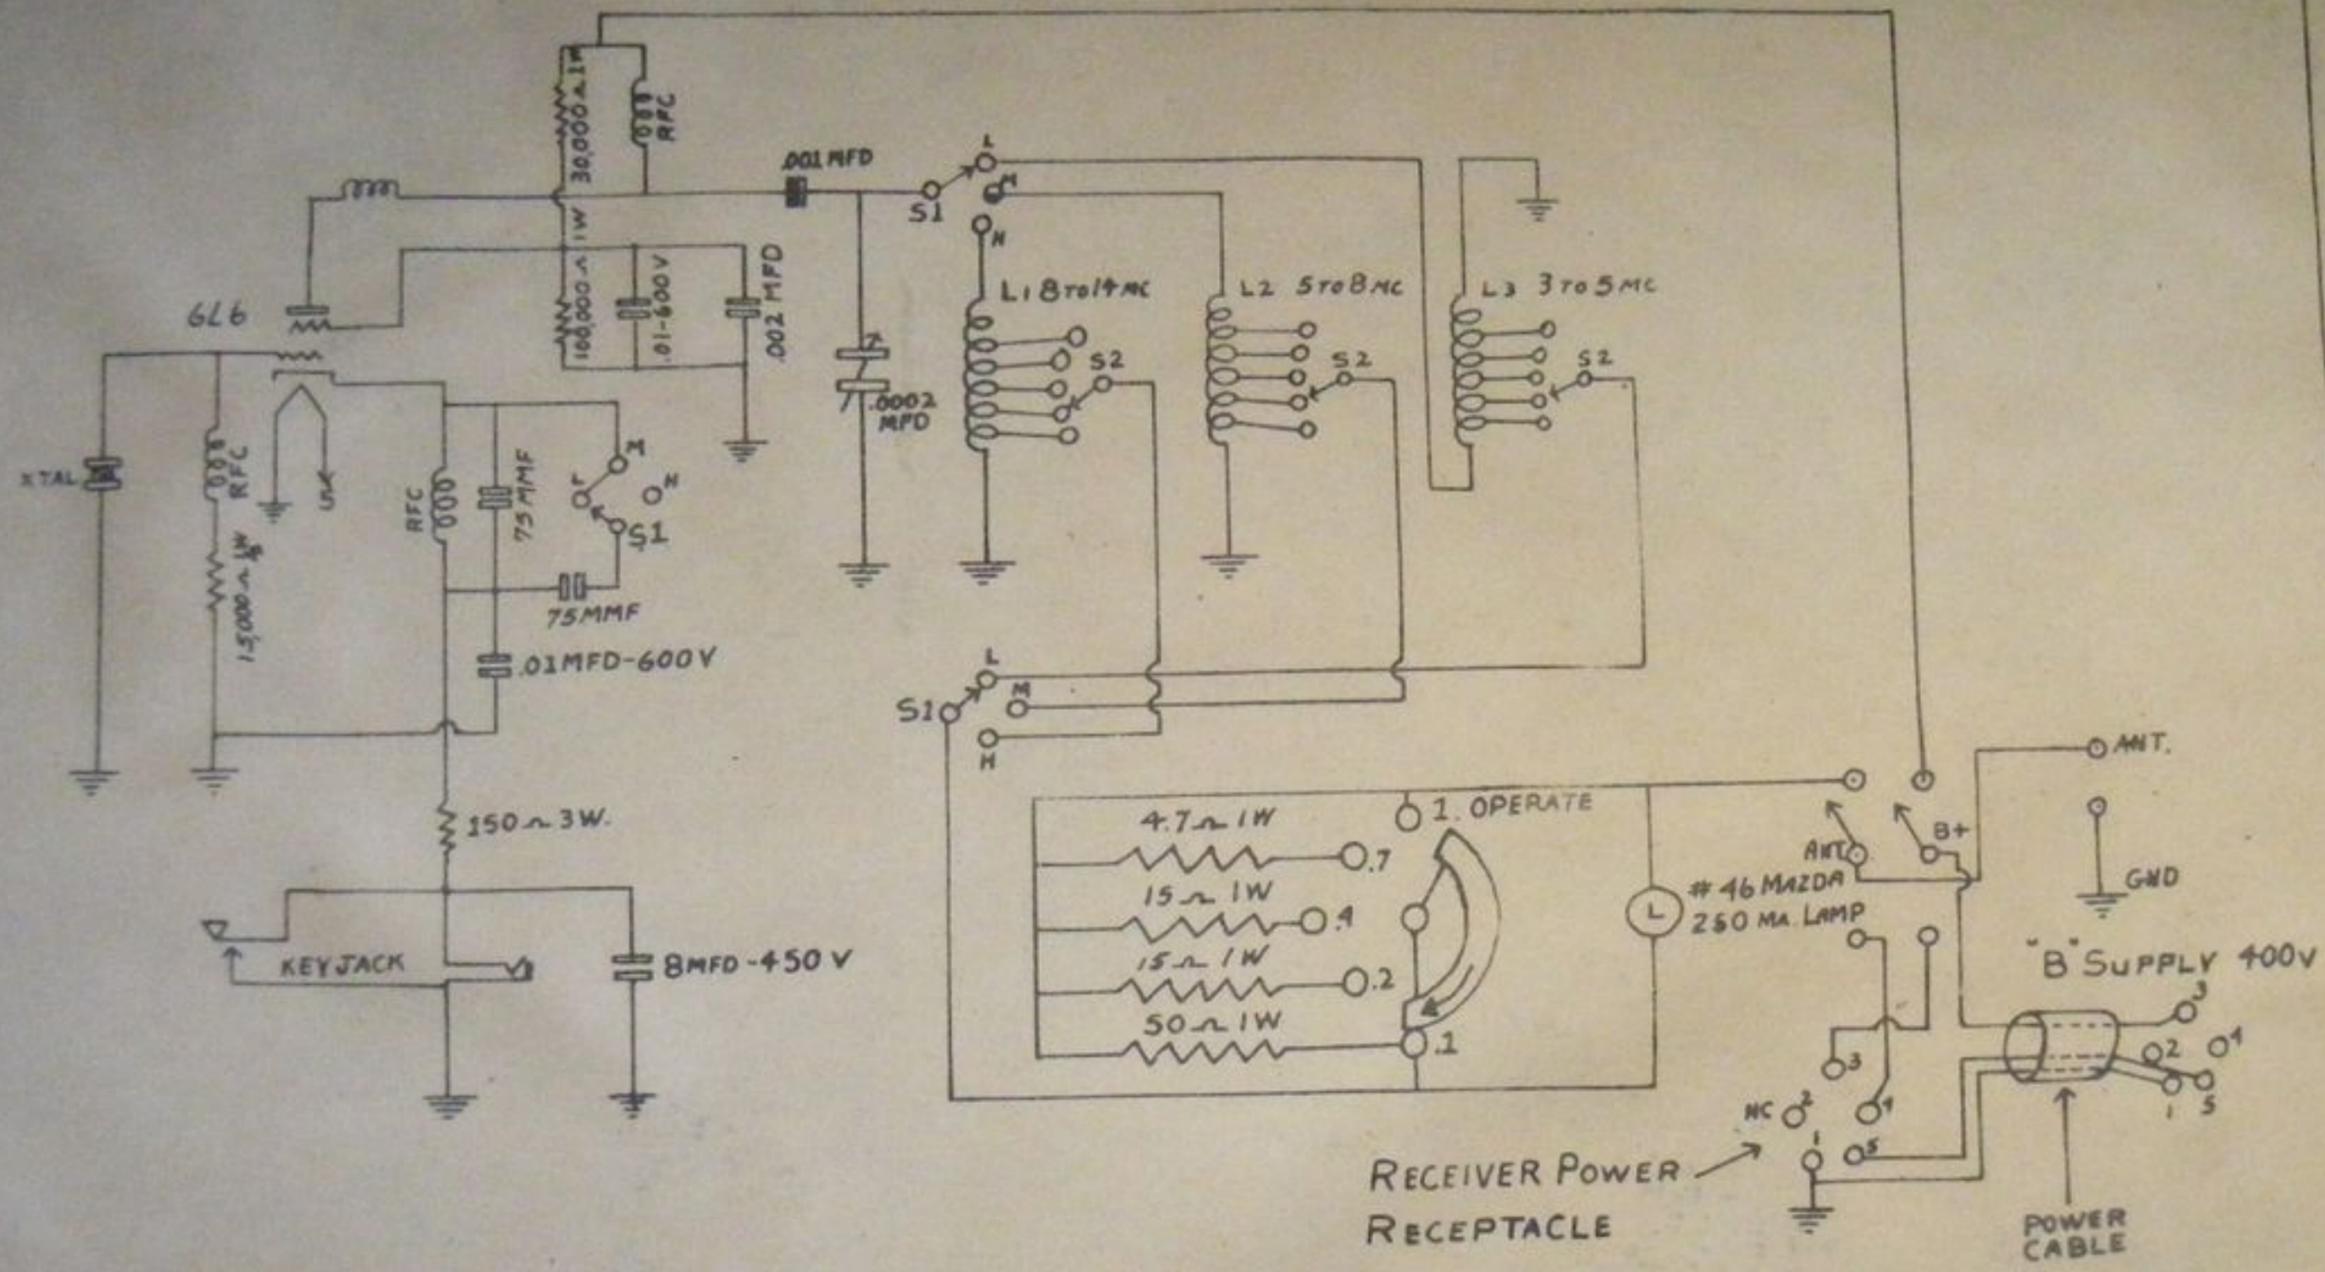

TRANSMITTER SST-1-B

12.7

BRIGHT

DIM

ANT  
RESONANCE

DIM POINTS

RCVR  
PWR.

SEND

RECV

PC  
P.

0 1 2 3 4 5 6 7 8 9 10  
TANK TUNING

3-7

6-12

8-15

MEGACYCLES

ANTENNA LOADING  
0 10 20 30 40 50

SST-1-E

ANT.  
LOADING

EXT.  
KEY


PHONES



OFF



ON  
BFO

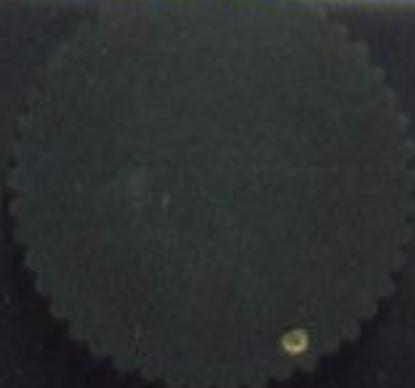

VOLUME

GND



ANT



6.2-16.3



2.4-6.3



LOT



6.2-16.3



MC

2.4-6.3



TUNING

SSR-I-G

4544

