


EJ-26U Installation Procedures

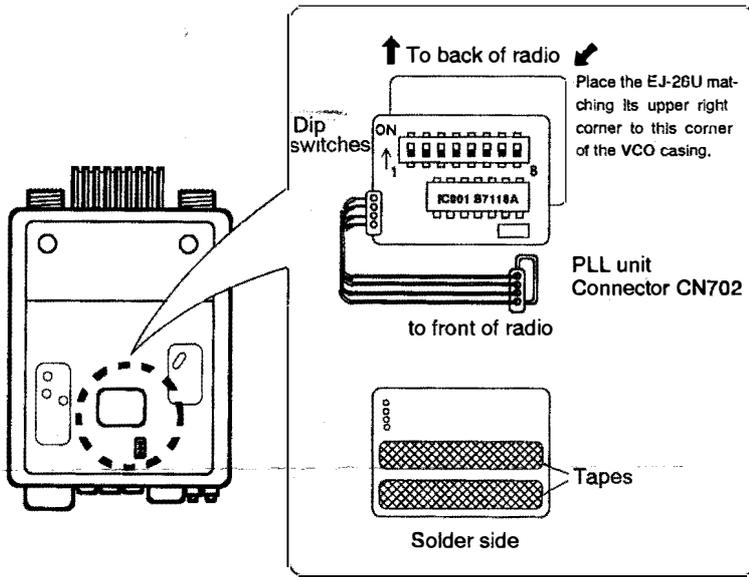

1. Remove the upper cover. Then remove the lower cover.
2. Peel off the blind stickers on the lower cover.
3. Remove tape on solder side of the EJ-26U and stick the EJ-26U onto the VCO unit (see diagram).
4. Connect the harnessed wire assembly to the PLL unit.
5. Reassemble the lower cover. Then the upper cover.
6. Set the Dip switches according to the programming chart.
7. For convenience sake only, adhere the programming chart on the lower cover.

Note : The power should be turned off during the procedures.

PS0224

M0 IPU YO3 FCA

Alinco Subaudible Tone Encoder Programming Chart
DX70T/TH

CTCSS	SW								CTCSS	SW								CTCSS	SW							
Freq.	1	2	3	4	5	6	7	8	Freq.	1	2	3	4	5	6	7	8	Freq.	1	2	3	4	5	6	7	8
67.0	*	*						*	107.2		*			*	*	*		167.9				*	*		*	*
71.9	*	*					*		110.9					*	*	*	*	173.8				*	*	*		
74.4	*	*					*	*	114.8				*					179.9				*	*	*		*
77.0	*	*			*				118.8				*				*	186.2				*	*	*	*	
79.7	*	*			*		*		123.0				*			*		192.8				*	*	*	*	*
82.5	*	*			*	*			127.3				*			*	*	203.5			*					
85.4	*	*			*	*	*		131.8				*		*			210.7			*					*
88.5		*			*				136.5				*		*		*	218.1			*					*
91.5		*			*			*	141.3				*		*	*		225.7			*				*	*
94.8		*			*		*		146.3				*		*	*	*	233.6			*			*		
97.4		*			*		*	*	151.4				*	*				241.3			*			*		*
100.0		*			*	*			156.7				*	*			*	250.3			*			*	*	
103.5		*			*	*		*	162.2				*	*		*										

* = ON / BLANK = OFF

M0 IPU YO3 FCA